

Breakout Cable

ID: **44x1**




KABELOVNA Děčín Podmokly s.r.o.
 Ústecká 840/33, 405 33 Děčín 5
 Czech Republic
 DIČ CZ26759993
 tel.: +420 412 706 222
 www.kabelovna.cz

16.1.2017 ver.7

J-V(ZN)HH 2-24F Breakout 2,4 mm

This cable is suitable for indoor use.

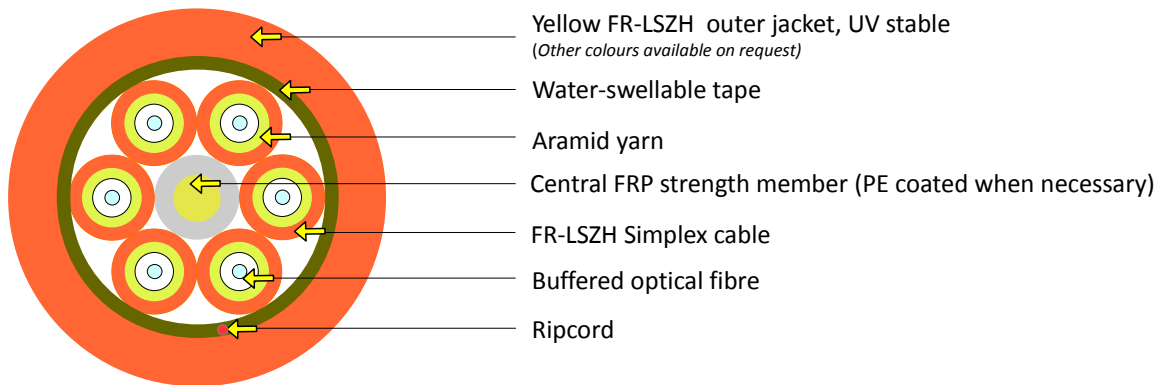

The picture represents a cable with 6 fibres

Mechanical and Environmental properties

Cable outer diameter	4F	8,2 ± 0,4	mm	EN 60811-203			
	6F	9,6 ± 0,4					
	8F	11,2 ± 0,4					
	12F	14,2 ± 0,4					
	16F	13,8 ± 0,4					
	18F	14,4 ± 0,4					
Cable weight	2F	62	kg/km				
	4F	68					
	6F	99					
	8F	127					
	12F	196					
	16F	188					
Max. tensile strength	18F	206	N	EN 60794-1-21-E1			
	24F	277					
	2F	400					
	4F	750					
	6F	2000					
	8F	2000					
Crush resistance test	12F	2500	N	EN 60794-1-21-E3			
	16F	2900					
	18F	3500					
	24F	4000					
	Impact resistance test				3	Nm	EN 60794-1-21-E4
		Min. bend radius (no load)			10	× OD	EN 60794-1-21-E11a
Min. bend radius (load)		15	× OD	EN 60794-1-21-E11b			
Temperature range	Installation	-5 to + 50°C		EN 60794-1-22-F1			
	Operation	-20 to + 60°C					
	Storage	-20 to + 60°C					
Fire properties – Flammability	pass	EN 60332-3-22 (cat.A)					
Fire properties – Acid gases	pass	EN 60754-1					
	pass	EN 60754-2					
Fire properties – Smoke density	pass	EN 61034-1					
	pass	EN 61034-2					

Cable life time - minimum 30 years

Sheat Marking

Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Buffer

xxTx	Tight
xxFx	Free
Colour	Natur
Material	FR-LSZH

Other buffer colours available on request.

Simplex jacket

Material	FR-LSZH
Colour	SM 9/125 Yellow
	MM 50/125 Green
	MM 62,5/125 Orange

Other jacket colours available on request

Outer jacket

Material	FR-LSZH
Colour	SM 9/125 – Yellow
	MM 50/125 - Green
	MM 62,5/125 - Orange

Other jacket colours available on request

Packing

Depending on ordered put-up lengths

