


A-DQ(ZN)2YT Drop max. 12F

This cable is suitable for outdoor aerial use.

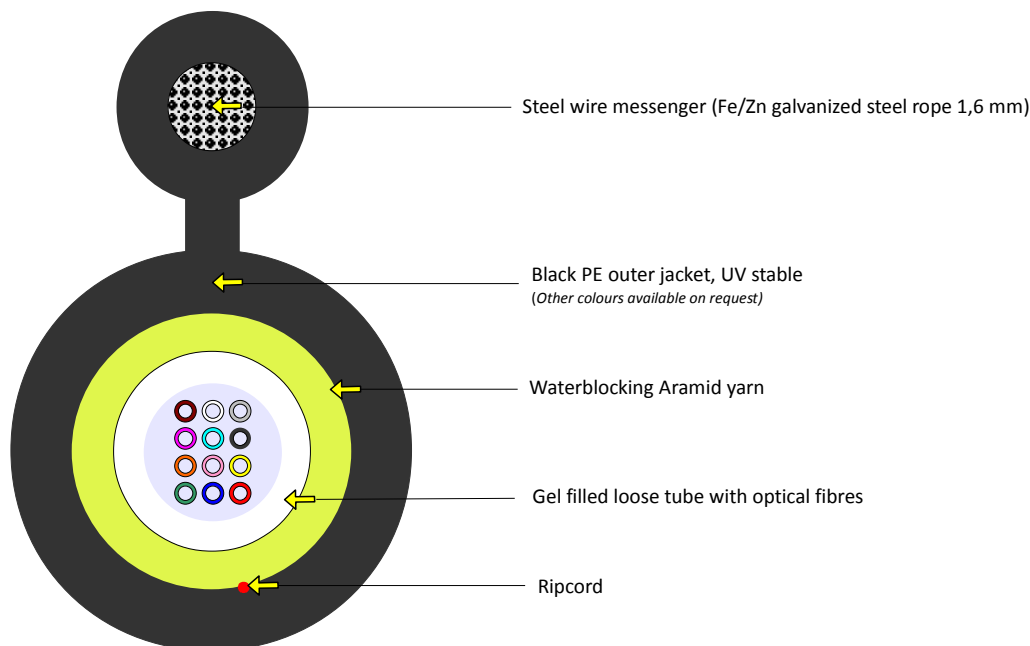

Mechanical and Environmental properties

| Test | Value | Unit | Method |
|--------------------------|------------------|------------|-------------------|
| Cable outer diameter | 6,1 × 11,7 ± 0,6 | mm | EN 60811-203 |
| Cable weight | 57 | kg/km | |
| Outer jacket thickness | 1,5 | mm | |
| Loose tube diameter | 2,5 | mm | |
| Max. tensile strength | 1000 | N | EN 60794-1-21-E1 |
| Crush resistance test | 1000 | N | EN 60794-1-21-E3 |
| Impact resistance test | 3 | Nm | EN 60794-1-21-E4 |
| Min. bend radius | 10 | × OD | EN 60794-1-2-E11a |
| Min. bend radius | 20 | × OD | EN 60794-1-2-E11b |
| Moisture resistance test | pass | | EN 60794-1-22-F5 |
| Temperature range | Installation | -15 to +50 | °C |
| | Operation | -30 to +70 | °C |
| | Storage | -30 to +70 | °C |

Cable life time - minimum 30 years

Sheat Marking

| | |
|--------------|--|
| Print colour | White |
| Print method | INK-Jet |
| Print legend | Manufacturer's name, job number, type of cable, length marking @ 1 m intervals |

Other print legends available on request

Fibre colour coding

According to TIA-EIA 598-A

| | | | |
|---|--------|----|-----------|
| 1 | Blue | 7 | Red |
| 2 | Orange | 8 | Black |
| 4 | Brown | 10 | Violet |
| 5 | Grey | 11 | Pink |
| 6 | White | 12 | Turquoise |

Other fibre colour sequences available on request

Packing

Depending on ordered put-up length

