

# Uni Tube Cable FRP Armoured

ID: **BF02**




KABELOVNA Děčín Podmokly s.r.o.  
Ústecká 840/33, 405 33 Děčín 5  
Czech Republic  
DIČ CZ26759993  
tel.: +420 412 706 222  
www.kabelovna.cz

9.7.2018 ver. 14

## J/A-DQBH (FRP1,0) max. 24F

This cable is suitable for indoor or outdoor use, direct burial possible.

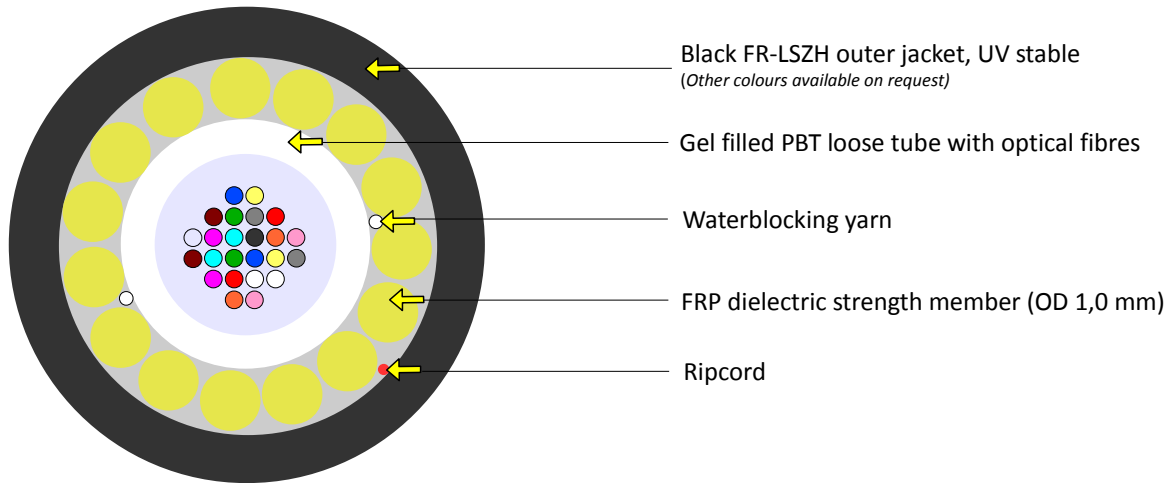

### Mechanical and Environmental properties

Test	Value	Unit	Method
Cable outer diameter	7,4 ± 0,4	mm	EN 60811-203
Cable weight	65	kg/km	
Outer jacket thickness	1,2	mm	
Loose tube diameter	3	mm	
Max. tensile strength	2300	N	EN 60794-1-21-E1
Crush resistance test	3000	kN	EN 60794-1-21-E3
Impact resistance test	25	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	15	× OD	EN 60794-1-21-E11a
Min. bend radius (load)	20	× OD	EN 60794-1-21-E11b
Moisture resistance test	pass		EN 60794-1-22-F5
Temperature range	Installation	-15 to +50	°C
	Operation	-40 to +70	°C
	Storage	-40 to +70	°C
Fire properties – Flammability	pass		EN 60332-3-22 (cat.A)
Fire properties – Acid gases		pass	EN 60754-1
			EN 60754-2
Fire properties – Smoke density	pass		EN 61034-1
			EN 61034-2

Cable life time - minimum 30 years

### Sheat Marking

Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

### Fibre colour coding

According to IEC 60304

1	Red	7	Brown	13	Red*	19	Brown*
2	Green	8	Violet	14	Green*	20	Violet*
3	Blue	9	Turquoise	15	Blue*	21	Turquoise*
4	Yellow	10	Black	16	Yellow*	22	Natur*
5	White	11	Orange	17	White*	23	Orange*
6	Grey	12	Pink	18	Grey*	24	Pink*

\*with black rings

Other fibre colour sequences available on request

### Packing

Depending on ordered put-up lengths

