


# A-DQ(ZN)2Y max. 24F

This cable is suitable for outdoor installation.

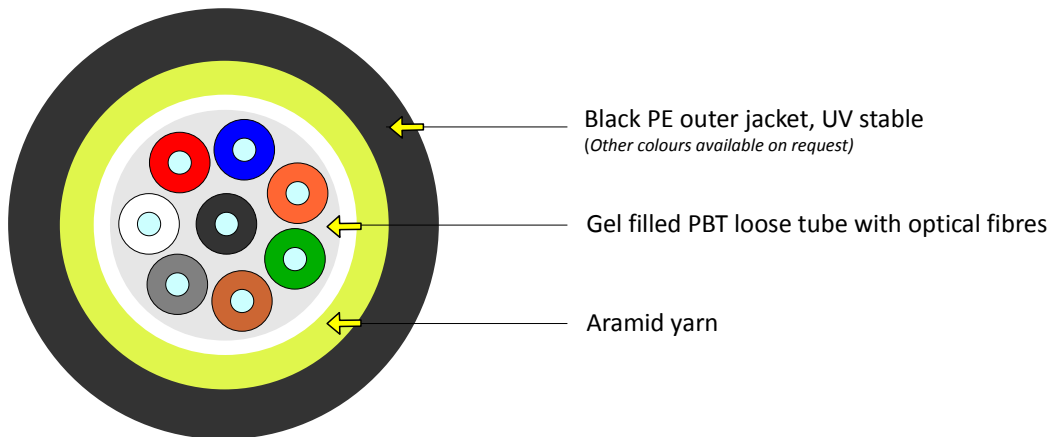

### Mechanical and Environmental properties

Test	Value	Unit	Method
Cable outer diameter	3,5 ± 0,1	mm	EN 60811-203
Cable weight	10	kg/km	
Outer jacket thickness	0,45	mm	
Loose tube diameter	2,5	mm	
Max. tensile strength	200	N	EN 60794-1-21-E1
Crush resistance test	700	N	EN 60794-1-21-E3
Impact resistance test	5	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	15	× OD	EN 60794-1-21-E11a
Min. bend radius (load)	20	× OD	EN 60794-1-21-E11b
Temperature range	Installation	-15 to + 50	°C
	Operation	-15 to + 70	°C
	Storage	-20 to + 70	°C

Cable life time - minimum 30 years

### Sheat Marking

Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

### Fibre colour coding

According to IEC 60304

1 Blue	5 Grey
2 Orange	6 White
3 Green	7 Red
4 Brown	8 Black

\*with black rings

Other fibre colour sequences available on request

### Packing

Depending on ordered put-up lengths

