

High-Fiber-Count & Reduce Diameter Multi Loose Tube Cable




KABELOVNA Děčín Podmokly s.r.o.
 Ústecká 840/33, 405 33 Děčín 5
 Czech Republic
 DIČ CZ26759993
 tel.: +420 412 706 222
 www.kabelovna.cz

ID: **Z374**

14. 7. 2022 ver. 1

A-DQ4Y 24×1,7 max. 576F **200μm**

This cable is suitable for outdoor use.

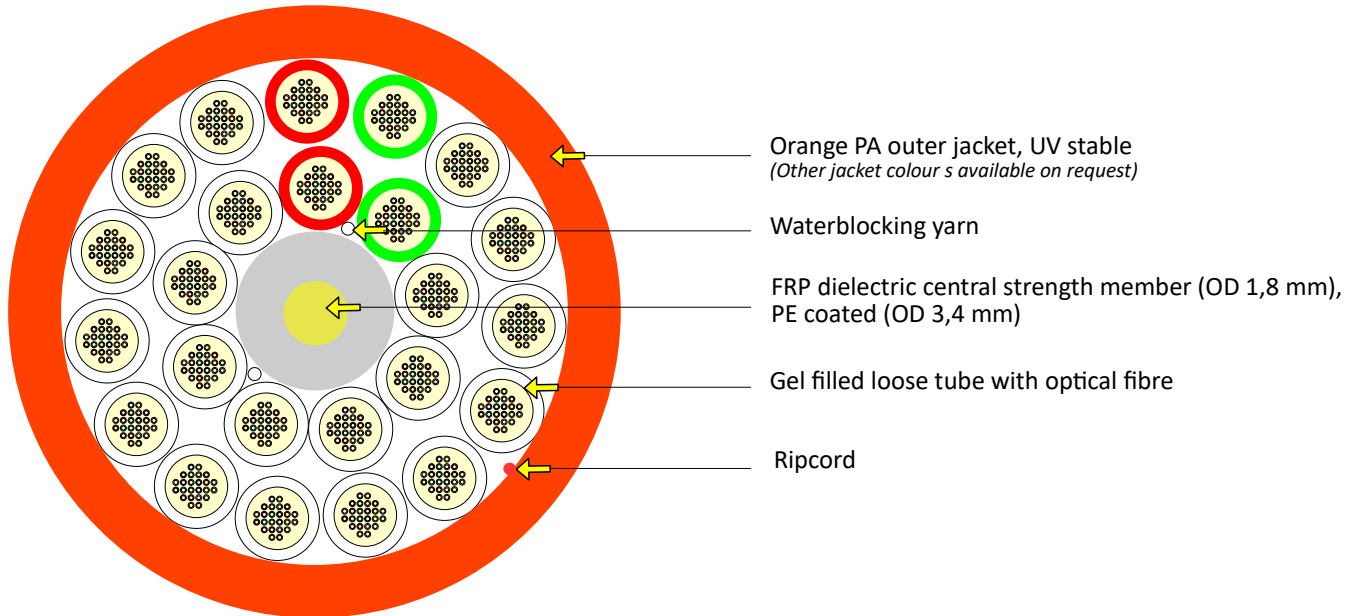

Mechanical and Environmental properties

Test	Value	Unit	Method
Cable outer diameter	11,2 ± 0,4	mm	EN 60811-203
Cable weight	120	kg/km	
Outer jacket thickness	0,5	mm	
Loose tube diameter	1,7	mm	
Max. tensile strength	800	N	EN 60794-1-21-E1
Crush resistance test	500	N	EN 60794-1-21-E3
Impact resistance test	3	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	15	× OD	EN 60794-1-21-E11a
Moisture resistance test	pass		EN 60794-1-22-F5
Temperature range	Installation	-15 to + 50	°C
	Operation	-30 to + 70	°C
	Storage	-40 to + 70	°C

Cable life time - minimum 30 years

Sheat Marking

Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Fibre Type

SMF G.657 200μm

See the Fibre Specification sheet

Fibre colour coding

According to IEC 60304

1 Red	7 Brown	13 Red*	19 Brown*
2 Green	8 Violet	14 Green*	20 Violet*
3 Blue	9 Turquoise	15 Blue*	21 Turquoise*
4 Yellow	10 Black	16 Yellow*	22 Natural*
5 White	11 Orange	17 White*	23 Orange*
6 Grey	12 Pink	18 Grey*	24 Pink*

* with black rings

Other fibre colour sequences available on request

Tube colour coding

- 1 Red
- 2 Green
- 3-24 White

In the case of lower number of fibres some tubes are replaced by uncoloured fillers

Other tubes colour sequences available on request

Packing

Depending on ordered put-up lengths

