


Product catalogue 2025

Fiber optic cables

 **KDP**[®]
WORLD CONNECTING CABLES

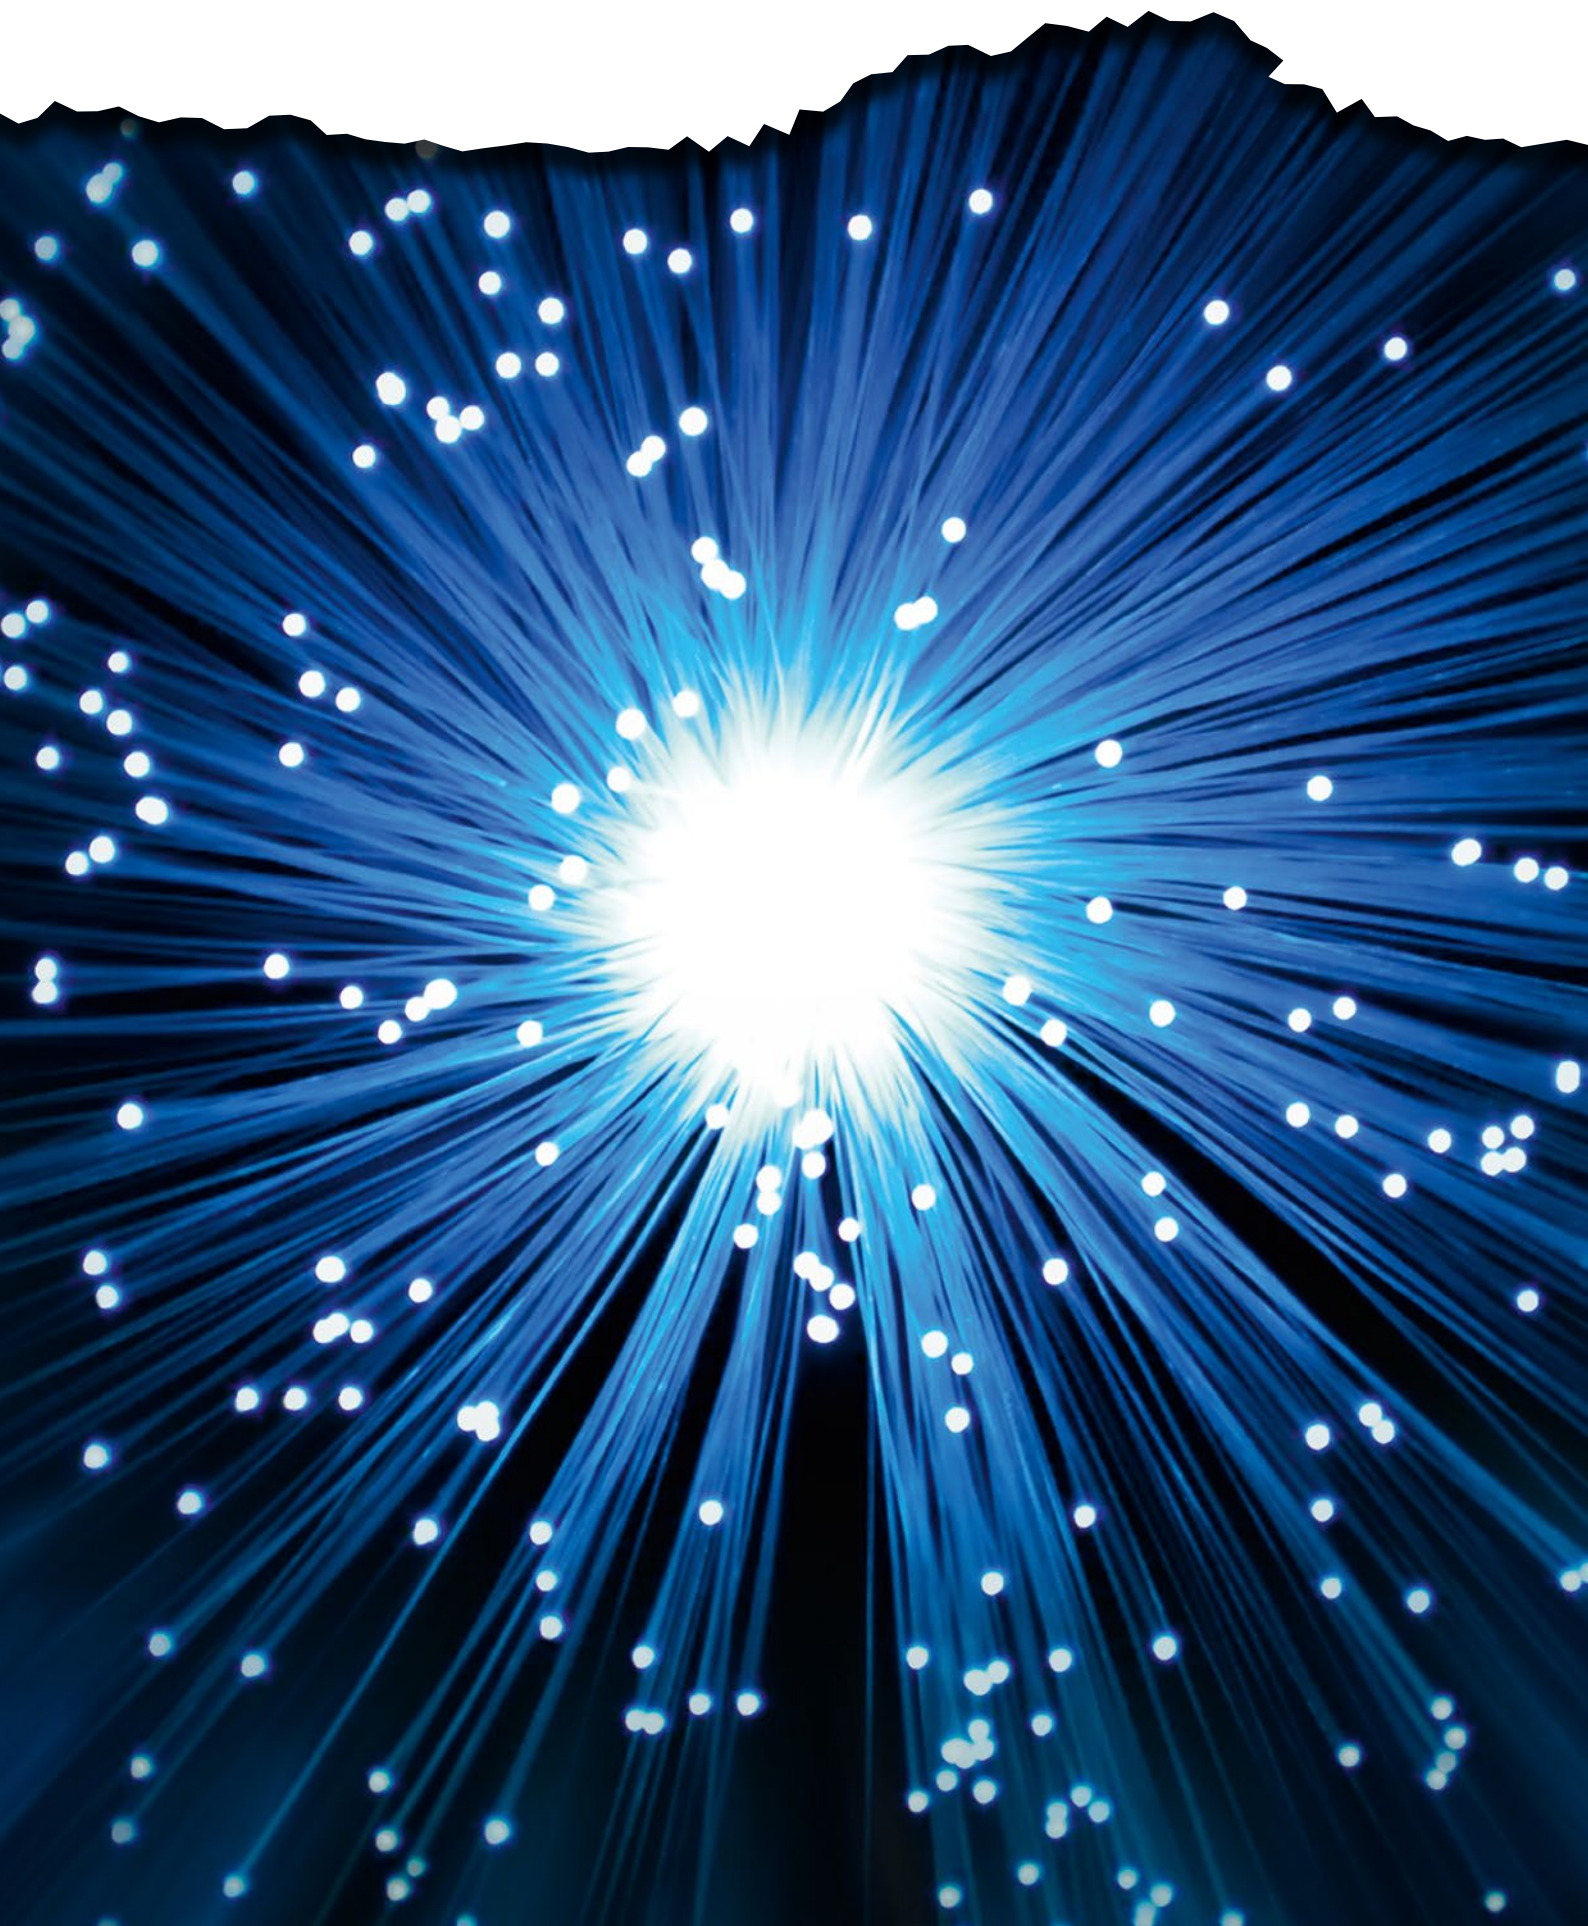

Dear Customers,

since 1910 we have been supplying the cables which help you to solve your problems through communication. Enclosed, please, find a new comprehensive catalogue containing the basic product line of our company.

We tried not only to include the standard products that you probably know very well, but some innovations and brand new products as well. Despite the catalogue is considered as a complete presentation of our production, not all variants can be published and included.

For some special products, please, contact our Sales Department that will provide you with any information requested. Let us advice you of the fact that all cable parameters in this catalogue are for information only.

All rights reserved.



Lenka Mádlová
Head of Commercial Department – Member of board

Summary

1. TIGHT BUFFERED CABLES

SIMPLEX	12
DUPLEX	13
HEAVY DUPLEX	14
BREAKOUT	15

2. DROP CABLES

DROP	20
FLAT DROP	21
FLAT DROP FIG. 8	22

3. CLT CABLES

STANDARD	26
IMPROVED	27
FRP	28
CST	29
CST DOUBLE	30
SWA	31
MICRO	32

4. MLT CABLES

MICROCABLES	36
STANDARD	42
IMPROVED	49
CST	52
CST DOUBLE	55
SWA	57
ADSS	58
FIG. 8	64

5. SPECIAL CABLES

FIRE RESISTANT – FSC 90 min., FSC 180 min.	68
CPR	70
TUNNELS AND SUBWAY	80
HYBRID	86
UNDERWATER	95
ARMoured MICRODUCT	97
FLES TUBE	98
TRACER WIRE	99

6. GENERAL SPECIFICATION

COLOUR CODE CHARTS	102
CODE TABLE	104
STRIPABILITY OF THE TIGHT BUFFERED FIBER	105
USED ABBREVIATIONS	105
PROPERTIES OF THE CABLE SHEATH	105
CHEMICAL RESISTANCE TABLE	106
FIRE PROPERTIES	107

7. INSTALLATION AND MANIPULATION

INTRODUCTION	110
MANIPULATION AND STORAGE	111
REWINDING/UNWINDING OF CABLE	113
BEND RADIUS OF CABLE	113
PULL STRENGTH OF CABLE	113
VERTICAL INSTALLATION	114
TWIST OF CABLE	115

Index



ID	page	ID	page	ID	page	ID	page	ID	page
11×1	12	CR02	49	KE0I	48	RH02	52	Z145	29
12×1	12			KE02	48	RM0I	38	Z159	58
13×1	12	DE0I	48	KM0I	39	RM02	38	Z174	12
14×1	12	DE02	48	KM02	39	RR0I	49	Z175	13
15×1	12	DM0I	39			RR02	49	Z176	14
16×1	12	DM02	39	L83A	65			Z182	47
17×1	12			LE0I	45	SE0I	48	Z187	64
18×1	12	F83A	65	LE02	45	SE02	48	Z194	58
19×1	12	FE0I	45	LH0I	53	SM0I	39	Z202	36
21×1	13	FE02	45	LH02	53	SM02	39	Z212	90
22×1	13	FH0I	53	LIF2	55			Z235	14
23×1	13	FH02	53	LIP2	55	TM0I	36	Z236	20
24×1	13	FIF2	55	LIPI	55	TM02	36	Z237	20
26×1	13	FIP2	55	LR0I	50	TM5I	92	Z238	32
28×1	13	FIPI	55	LR02	50	Tracer w.	99	Z279	14
32×1	14	FLES	98	LWF2	57			Z281	69
34×1	14	FR0I	50	LWPI	57	UE0I	44	Z282	69
38×1	14	FR02	50	LXPK	94	UE02	44	Z283	69
41×1	15	FWF2	57			UM0I	38	Z284	69
42×1	15	FWPI	57	N3HI	59	UM02	38	Z285	69
42×8	17	FXPK	94	N3XI	60			NEW Z297	68, 80
44×1	15			N3YI	61	VE0I	44	Z298	68
44×8	17	G83A	65	N4HI	59	VE02	44	Z299	68
49×1	15	GE0I	45	N4RI	63	VH0I	54	NEW Z300	68, 81
7A0I	20	GE02	45	N4XI	60	VH02	54	Z304	42
82×1	16	GH0I	53	N4YI	61	VM0I	38	Z320	91
		GH02	53	N4ZI	62	VM02	38	Z339	33
A860	64	GIF2	56	N5HI	59	VR0I	49	Z349	43
A862	64	GIPI	56	N5RI	63	VR02	49	Z350	43
AE00	26	GR0I	50	N5XI	60			Z366	33
AE02	26	GR02	50	N5YI	61	WM0I	36	Z387	97
AL00	33	GWF2	57	N5ZI	62	WM02	36	Z388	96
AR00	27	GWPI	57	N6HI	59	WM5I	92	Z393	40
AR02	27	GXPK	94	N6RI	63			Z410	97
AS0I	58			N6XI	60	Z001	86	Z436	41
		H83A	65	N6YI	61	Z006	32	Z437	41
BE00	26	HE0I	45	N6ZI	62	Z008	32	Z438	46
BE02	26	HE02	45	N7RI	63	Z019	36	Z439	95
BF0I	28	HH0I	53	N7SI	63	Z022	41, 42	NEW Z449	20
BF02	28	HH02	53	N9ZI	62	Z024	40	NEW ZN01	75, 82
BH0I	29	HIF2	56			Z025	40	ZN02	72
BH02	29	HIPI	56	PE0I	44	Z026	12	ZN03	77
BIF2	30	HR0I	50	PE02	44	Z041	21	NEW ZN04	78, 83
BIP2	30	HR02	50	PH0I	52	Z042	22	ZN05	74
BIPI	30	HWF2	57	PH02	52	Z043	21	ZN06	73
BR00	27	HWPI	57	PM0I	38	Z044	32	ZN07	76
BR02	27	HXPK	94	PM02	38	Z045	40	NEW ZN08	79, 84
BWF2	31			PR0I	49	Z046	22	ZNx0	71
BWFI	31	CH0I	52	PR02	49	Z047	87	NEW ZNx1	70
BWP2	31	CH02	52			Z049	37		
BWPI	31, 93			QM0I	36	Z078	88		
		IE00	45	QM02	36	Z090	47		
CE0I	44	IE02	45	QM5I	92	Z108	36		
CE02	44	IR0I	51			Z130	88		
CM0I	38	IR02	51	RE0I	44	Z131	89		
CM02	38	IXPK	94	RE02	44	Z132	89		
CR0I	49			RH0I	52	Z144	29		


History and present of **KABELOVNA** Děčín Podmokly



KDP was founded in 1909 and 1910 as a branch of the Bergmann cable plants in Berlin, the original name of the company being „Rakouské Bergmannovy závody spol. s r.o., Vídeň, továrna Podmokly“.

From the very outset the plant manufactured all types of power and communications cables with lead casing and the relevant cable sets, as well as rubber-insulated conductors, dynamo wires and insulation pipes with accessories. Company activity at that time also included projects involving electrical equipment and its installation.

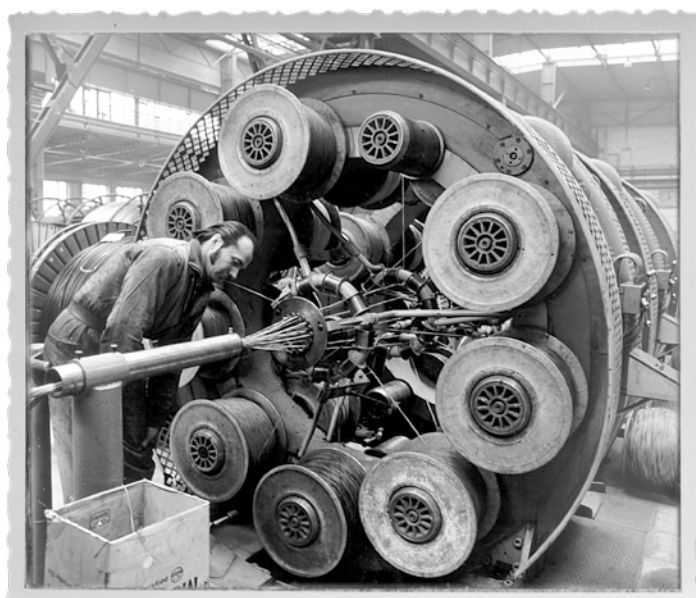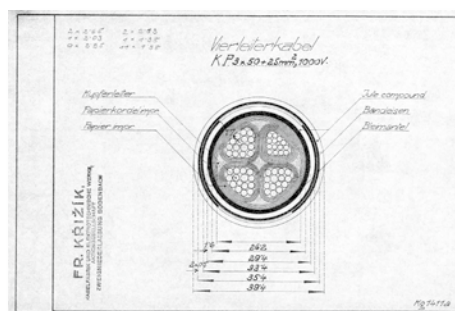


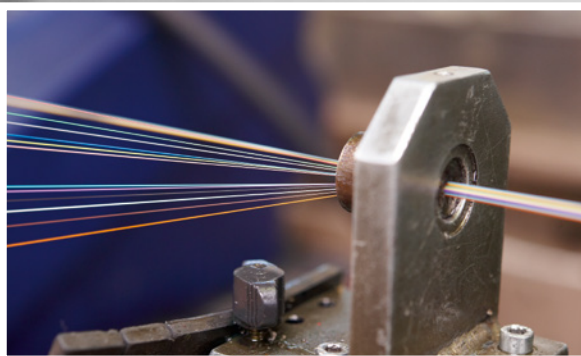

The cable factory came into the hands of Anglo-Pragobanka as part of Křižík a spol. Praha after the First World War and this company reconstructed the entire business. The production of trunk communications cables got underway at this time. The cable factory and neighbouring copper works were then merged in 1932 as the „Měďárna, kabelovna a elektrotechnické závody Křižík-Chaudoir, Praha“. However, the production programme at the cable factory did not change too radically.

The company was nationalised after 1945. It was later incorporated as part of KABLO Kladno and its specialisation amplified. The main production programme became the manufacture of communications cables and in 1961 KABLO Děčín became the monopoly producer of cables for local and long-distance telecommunications networks using top-of-the-range technology. The company was privatised after 1990, became independent again and returned to its traditional name of KABELOVNA Děčín-Podmokly, a.s. SIEMENS AG then entered the company in 1992. The result of mutual cooperation here was considerable modernisation of production technology, the expansion of the range produced and the strengthening of KABELOVNA Děčín-Podmokly, a.s. on global markets.

SIEMENS sold its share in KABELOVNA to American venture-capital fund Bancroft Eastern Europe Fund L.P. in July 2000, before this company in turn sold its share to American company CDT (Cable Design Technology) in December 2001. CDT then merged with American company BELDEN in 2004, the newly-founded company taking on the name of Belden CDT Inc. 2007 the cable works is sold to Wilms Gruppe, the company is divided into Kabelovna Děčín Podmokly, s.r.o. and KDP Assembly, s.r.o.

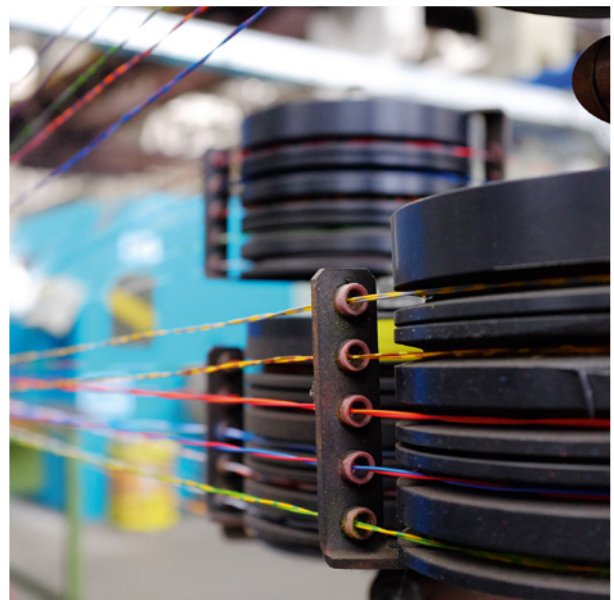

History

4. 9. 1909	Execution of contract on establishment of company „Rakouské Bergmannovy závody, Berlín, elektrotechnická společnost, s. r. o.“ with branch in Vienna.
27. 6. 1911	Launch of Production – 750 employees. Production of power and communication cables, cable sets and accessories, rubber wires and insulation tubes including accessories.
05/1919	The company was acquired by „Elektrotechnické závody František Křížik, Praha, a. s.“ Initiation of remote communication cables production.
03/1930	The company completely burnt down. Production restored at the end of year 1930.
05/1945	The company came under national control of Křížik a. s. corporation. Then it was nationalized and became a part of national company KABLO Bratislava. Production of power and communication cables with lead coating, rubberized wires and coil wires.
1. 1. 1950	Establishment of national company KABLO Děčín.
1959	Production of remote communication cables.
1961	KABLO Děčín became a monopoly producer of communication cables for local networks.
1982–1984	Construction of new hall to expand the production of communication cables.
1985	Termination of power cables production.
1988	Initiation of optic cables production.
31. 12. 1990	Privatization, establishment of incorporated company. The original name KABELOVNA Děčín Podmokly, a. s. was used.
1992	Company share acquisition by SIEMENS AG.
1994	Initiation of cable assemblies production.
1995	ISO 9001 certification completed.
1996	Initiation of installation cables production.
1996	Czech Republic Quality Award.
1998	ISO 14001 certification completed.
2000	Establishment of subsidiary company KDP Kabeltechnik Berlin, GmbH.
2000	Sale of SIEMENS AG share to investment fund BANCROFT CZ.
2001	CDT Pittsburgh becomes a majority owner of the company.
2002	Complete renewal of optic cable assortment.
2003	Initiation of data cable production.
2004	Merge with Belden company, Belden CDT inc. was established.
2007	Wilms Gruppe becomes a new owner of KABELOVNA.
2010	KABELOVNA Děčín Podmokly, s.r.o. celebrates 100 th Anniversary.
2015	New portfolio of cable constructions.
1. 1. 2016	KABELOVNA Děčín Podmokly, s.r.o. has become a member of FTTH Council.
2022	KDP has become a member of Association of Cable Manufacturers.

Certificates and CPR

KDP
WORLD CONNECTING CABLES

DECLARATION OF PERFORMANCE
No. 2/23


1. Unique identification code of the product type:	JIA-QQBN(S)RH 12,24 (ZND1)
2. Intended uses:	Communication fiber optical cable
3. Manufacturer:	KABELOVNA Děčín Podmokly, s.r.o., Ústecká 840/33, 405 33 Děčín 5, CZECH REPUBLIC
4. Authorized representative:	-
5. Systems of AVCP:	1+
6. Harmonised standard:	EN 60754:2014+A1:2016
Notified body:	ELEKTROTECHNICKÝ ZKUSOBNÍ ÚSTAV s.p., No. 1014
7. Declared performance:	Reaction to fire: B2ca-s1dca1 Dangerous substances: NPD
8. Appropriate Technical Documentation and/or Specific Technical Documentation:	Test report No. 212740-01/02 16.12.2021

The performance of the product identified above is in conformity with the set of declared performances.
This declaration of performance is issued, in accordance with Regulation (EU) No. 305/2011, under the sole responsibility of the manufacturer identified above.

Place of issue: Děčín Date of issue: 9.2.2023

Signed for and on behalf of the manufacturer: Ing. Lenka Máčlová

Function: Commercial director

 KABELOVNA Děčín Podmokly, s.r.o.
Ústecká 840/33 | 405 33 Děčín
Czech Republic
E-mail: info@kdp.cz
www.kdp.cz
E-mail: info@kdp.cz
www.kdp.cz

TUV NORD

CERTIFICATE

Management system as per
EN ISO 14001 : 2015

The Certification Body TÜV NORD CERT GmbH hereby confirms as a result of the audit, assessment and certification decision according to ISO/IEC 17021-1:2015, that the organization

KABELOVNA Děčín Podmokly, s.r.o.
Ústecká 840/33
405 33 Děčín
Czech Republic

 **KDP**
WORLD CONNECTING CABLES

operates a management system in accordance with the requirements of ISO 14001 : 2015 and will be assessed for conformity within the 3 year term of validity of the certificate.

Scope

Production and testing of metallic and optical cables.

Certificate Registration No. 44 104 990276
Audit report No. 2006/2022
Valid from 08.03.2023
Valid until 07.03.2026
Initial certification 1995


Certification Body
at TÜV NORD CERT GmbH

Práha, 10.02.2023

Validity can be verified at <https://www.tuv-nord.de/de/unternehmen/certification/certifikatsdatenbank>.

TÜV NORD CERT GmbH Am TÜV 1 45307 Essen www.tuv-nord-cert.com

TUV NORD

CERTIFICATE

Management system as per
EN ISO 9001 : 2015

The Certification Body TÜV NORD CERT GmbH hereby confirms as a result of the audit, assessment and certification decision according to ISO/IEC 17021-1:2015, that the organization

KABELOVNA Děčín Podmokly, s.r.o.
Ústecká 840/33
405 33 Děčín
Czech Republic

 **KDP**
WORLD CONNECTING CABLES

operates a management system in accordance with the requirements of ISO 9001 : 2015 and will be assessed for conformity within the 3 year term of validity of the certificate.

Scope

Production and testing of metallic and optical cables.

Certificate Registration No. 44 100 990276
Audit report No. 2003/2022
Valid from 04.03.2023
Valid until 03.03.2026
Initial certification 1995


Certification Body
at TÜV NORD CERT GmbH

Práha, 10.02.2023

Validity can be verified at <https://www.tuv-nord.de/de/unternehmen/certification/certifikatsdatenbank>.

TÜV NORD CERT GmbH Am TÜV 1 45307 Essen www.tuv-nord-cert.com





1. TIGHT BUFFERED CABLES

- SIMPLEX
- DUPLEX
- HEAVY DUPLEX
- BREAKOUT

SIMPLEX

Specification: 16×1, 17×1, 11×1, 12×1, 14×1, 15×1, 18×1, 19×1, 13×1, Z026, Z174



Indoor




FTTx



Data center



Halogen free

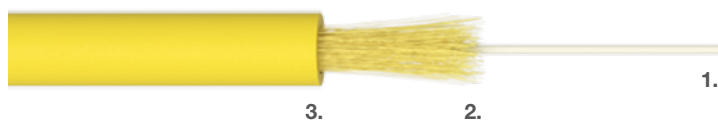

Description of materials:

1. FR-LSZH buffered optical fiber. **2.** Waterblocking aramid yarn. **3.** FR-LSZH outer jacket.

Temperature range

Installation -5 to +50 °C

Operation -5 to +50 °C

Storage -5 to +50 °C

Design code	Simplex diameter [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
16×1	1.6	3	100	500
17×1	1.7	3	100	500
11×1	1.8	4	100	500
12×1	2.0	5	100	500
14×1	2.4	7	250	500
15×1	2.5	7	300	500
18×1	2.8	8	400	500
19×1	2.9	9	300	500
13×1	3.0	9	300	500
Z026	2.3	6	250	500
Z174	2.6	8	300	500

DUPLEX

Specification: 26×1, 21×1, 22×1, 24×1, 28×1, 23×1, Z175



Indoor




FTTx



Data center



Halogen free

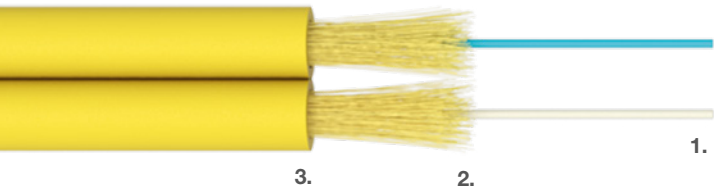

Description of materials:

1. FR-LSZH buffered optical fibers. **2.** Waterblocking aramid yarn. **3.** FR-LSZH outer jacket.

Temperature range

Installation	-5 to +50 °C
Operation	-5 to +50 °C
Storage	-5 to +50 °C

Design code	Cable outer diameter [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
26×1	1.6 × 3.4	6	200	1,000
21×1	1.8 × 3.8	7	200	1,000
22×1	2.0 × 4.3	9	200	1,000
24×1	2.4 × 5.1	12	500	1,000
28×1	2.8 × 5.9	17	500	1,000
23×1	3.0 × 6.3	20	500	1,000
Z175	2.6 × 5.6	14	500	1,000

HEAVY DUPLEX

Specification: 32×1, 34×1, 38×1, Z176, Z235, Z279



Indoor




FTTx



Data center



Halogen free

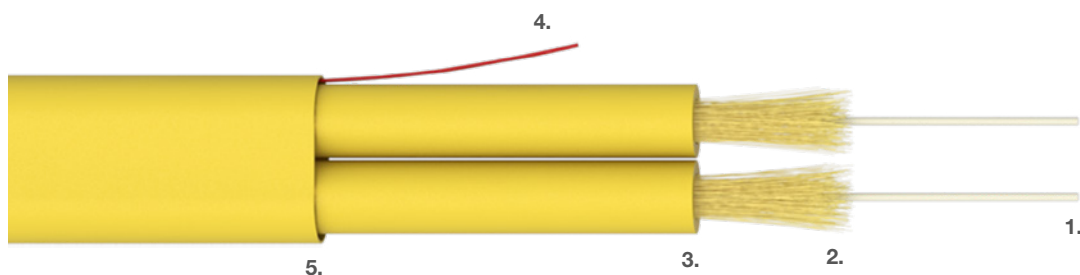

Description of materials:

- 1.** FR-LSZH buffered optical fibers. **2.** Waterblocking aramid yarn. **3.** FR-LSZH inner jacket. **4.** Rip-Cord.
5. FR-LSZH outer jacket, UV stable.

Temperature range	32×1, 34×1, 38×1, Z176	Z235, Z279
Installation	0 to +50 °C	-15 to +50 °C
Operation	0 to +50 °C	-20 to +70 °C
Storage	0 to +50 °C	-20 to +70 °C

Design code	Cable outer diameter [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
32×1	3.0 × 5.0	19	200	1,000
34×1	3.6 × 6.0	28	500	1,000
38×1	4.2 × 7.0	35	500	1,000
Z176	3.6 × 6.2	28	600	1,000
Z235	3.0 × 5.0	18	200	1,000
Z279	4.2 × 7.0	33	500	1,000

BREAKOUT STANDARD

Specification: 41×1, 42×1, 44×1, 49×1



Indoor




FTTx



Data center



Halogen free

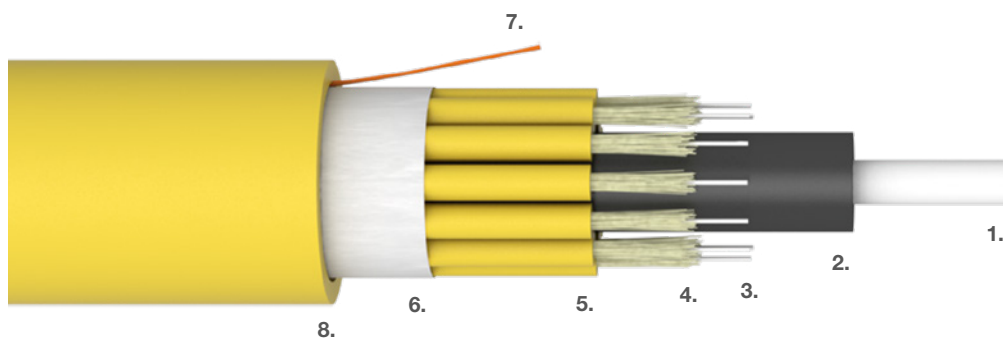

Description of materials:

- 1.** Central FRP strength member. **2.** PE coating for central FRP strength member when necessary.
3. FR-LSZH buffered optical fibers. **4.** Waterblocking aramid yarn. **5.** Simplex cable. **6.** Water-swellaable tape.
7. Rip-Cord. **8.** FR-LSZH outer jacket, UV stable.

Temperature range	41×1, 49×1	42×1, 44×1
Installation	-5 to +40 °C	-5 to +50 °C
Operation	-5 to +50 °C	-20 to +60 °C
Storage	-25 to +60 °C	-20 to +60 °C

Design code	Max. fiber count	Simplex diameter [mm]	Cable outer diameter [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
41×1	36	1.8	15.0	226	3,500	2,000
42×1	24	2.0	14.3	197	4,000	1,500
44×1	24	2.4	16.8	277	4,000	1,500
49×1	24	2.9	19.7	334	5,300	1,500

BREAKOUT NO CSM

Specification: 82×1



Indoor




FTTx



Data center



Halogen free

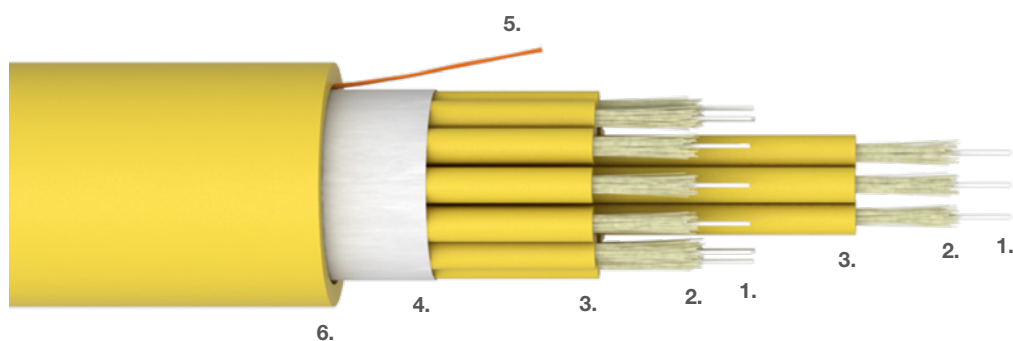

Description of materials:

1. FR-LSZH buffered optical fibers. **2.** Waterblocking aramid yarn. **3.** Simplex cable. **4.** Water-swellable tape. **5.** Rip-Cord. **6.** FR-LSZH outer jacket, UV stable.

Temperature range

Installation	-5 to +50 °C
Operation	-20 to +60 °C
Storage	-20 to +60 °C

Design code	Max. fiber count	Simplex diameter [mm]	Cable outer diameter [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
82×1	24	2.0	14.3	192	300	1,000

BREAKOUT IMPROVED

Specification: 42×8, 44×8



Indoor



FTTx




Data center



Halogen free



High tensile

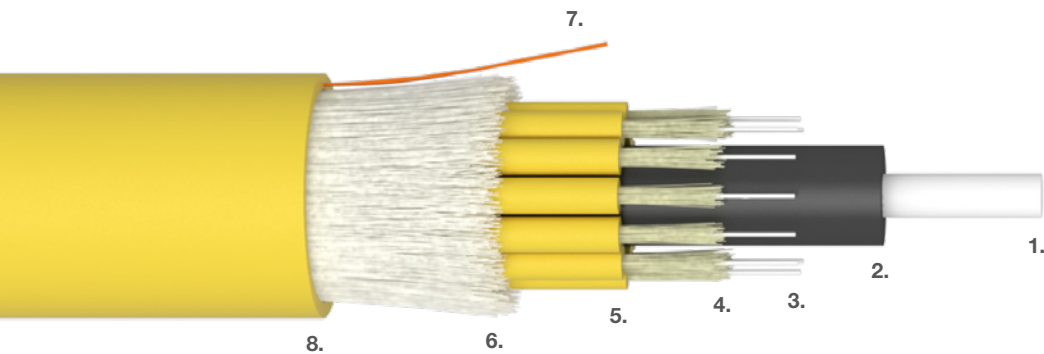


Description of materials:

1. Central FRP strength member. 2. PE coating for central FRP strength member when necessary.
3. FR-LSZH buffered optical fibers. 4. Waterblocking aramid yarn. 5. Simplex cable.
6. Waterblocking E-glass yarn. 7. Rip-Cord. 8. FR-LSZH outer jacket, UV stable.

Temperature range	42×8	44×8
Installation	-5 to +40 °C	-5 to +40 °C
Operation	-20 to +60 °C	-5 to +50 °C
Storage	-20 to +60 °C	-25 to +60 °C

Design code	Max. fiber count	Simplex diameter [mm]	Cable outer diameter [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
42×8	24	2.0	15.4	246	4,500	2,000
44×8	24	2.4	18.1	334	5,500	2,000

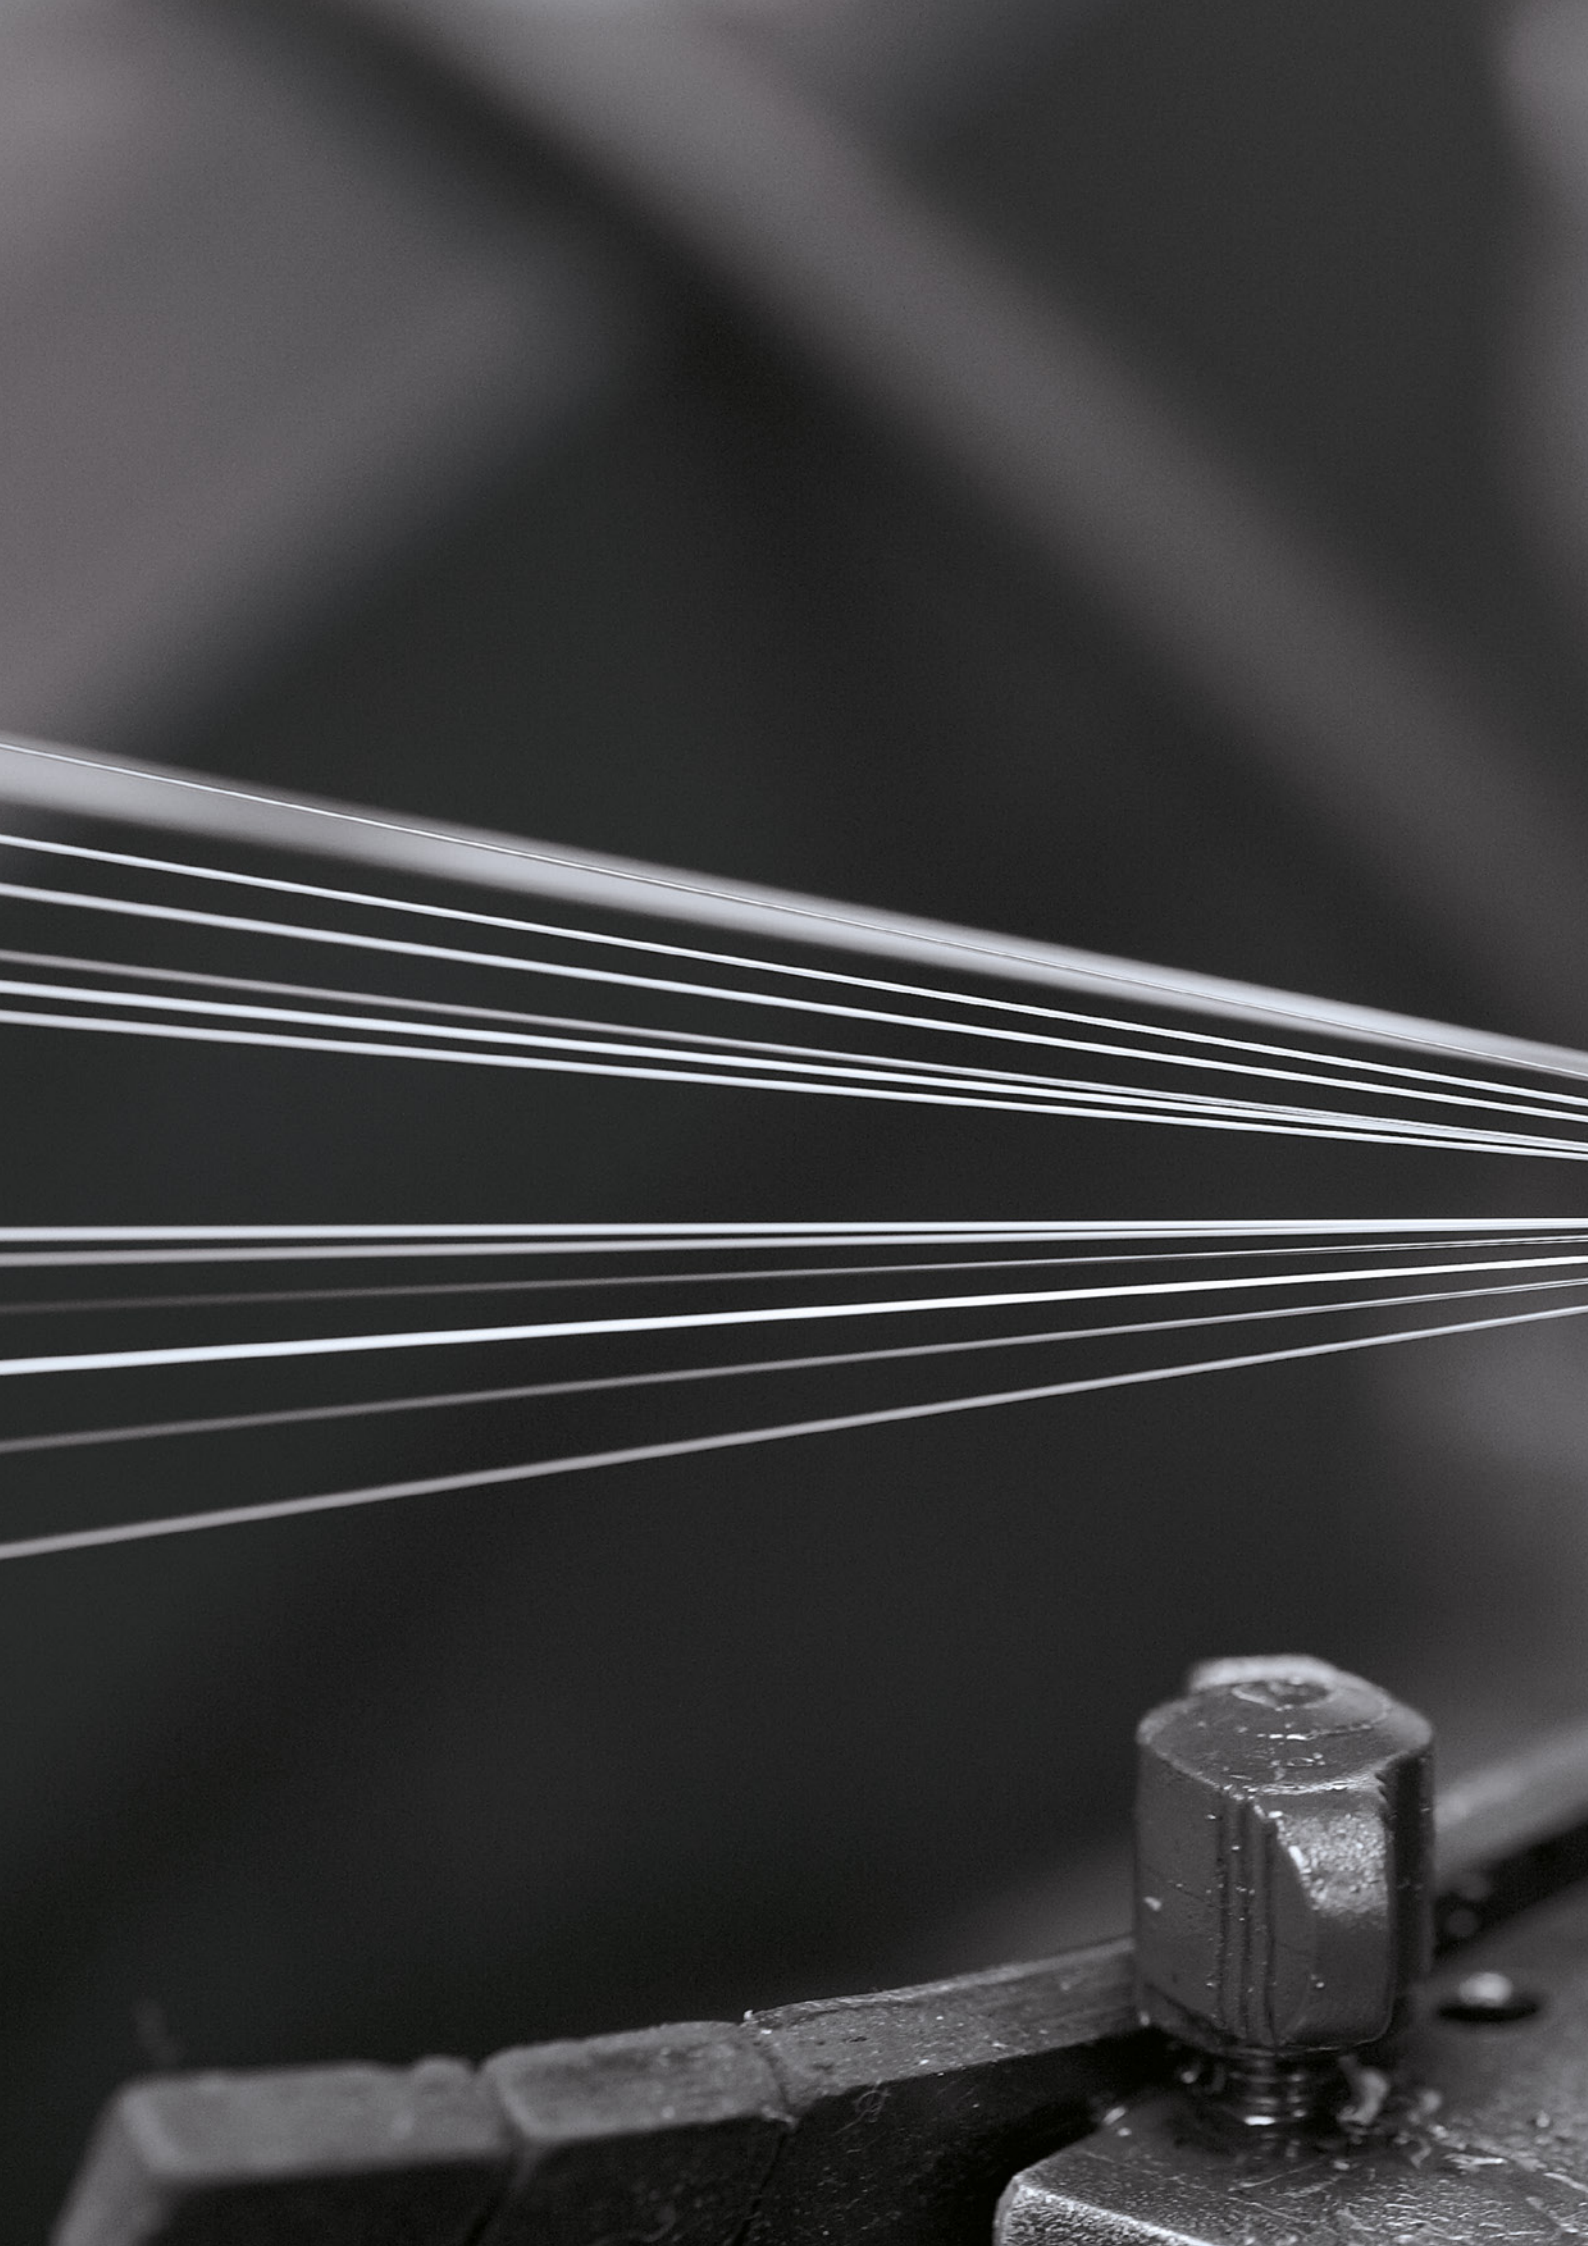



2. DROP CABLES

- DROP
- FLAT DROP
- FLAT DROP FIG. 8

DROP

Specification: 7A01, Z236, Z237, Z449



Indoor



Outdoor




FTTx



Halogen free



Aerial



Description of materials:

1. Optical fibers. **2.** Aramid yarn. **3.** FR-LSZH outer jacket, UV stable.

Temperature range

Installation -5 to +50 °C

Operation -20 to +60 °C

Storage -20 to +60 °C

Design code	Fiber count	Cable outer diameter [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
7A01	1–6	3.0	10	500	1,000
7A01	8–12	3.4	12	500	1,000
7A01	16	3.7	14	500	1,000
7A01	24	4.0	16	500	1,000
Z236	1–12	3.4	13	700	1,000
Z237	2	3.0	11	1,000	1,000
Z237	4	3.2	11	1,000	1,000
Z237	8	3.2	12	1,000	1,000
Z237	12	3.4	13	1,000	1,000
NEW Z449	4	2,8	7	400	1,000

FLAT DROP

Specification: Z041, Z043


Indoor

Outdoor

FTTx

Halogen free

Aerial

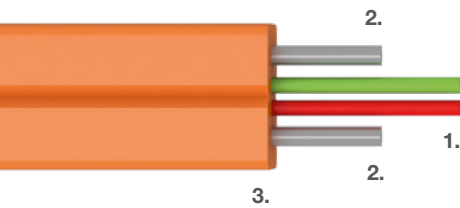

Description of materials:

1. Optical fibers. 2. Steel wire or FRP. 3. FR-LSZH outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-30 to +70 °C
Storage	-30 to +70 °C

Design code	Fiber count	Cable outer diameter [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z041	2	2 × 3.0	10	300	4,000
Z043	2	2 × 3.0	8	100	4,000

FLAT DROP FIG. 8

Specification: Z042, Z046



Indoor



Outdoor




FTTx



Halogen free




Aerial

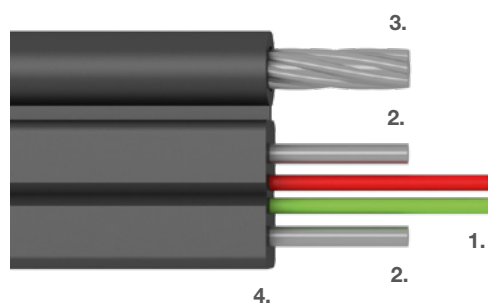

Description of materials:

- 1.** Optical fibers. **2.** Steel wire or FRP. **3.** Steel wire messenger Ø 1.0 mm.
4. FR-LSZH outer jacket, UV stable.

Design code	Fiber count	Cable outer diameter [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z042	2	2 × 5.2	20	800	4,000
Z046	2	2 × 5.2	18	800	4,000

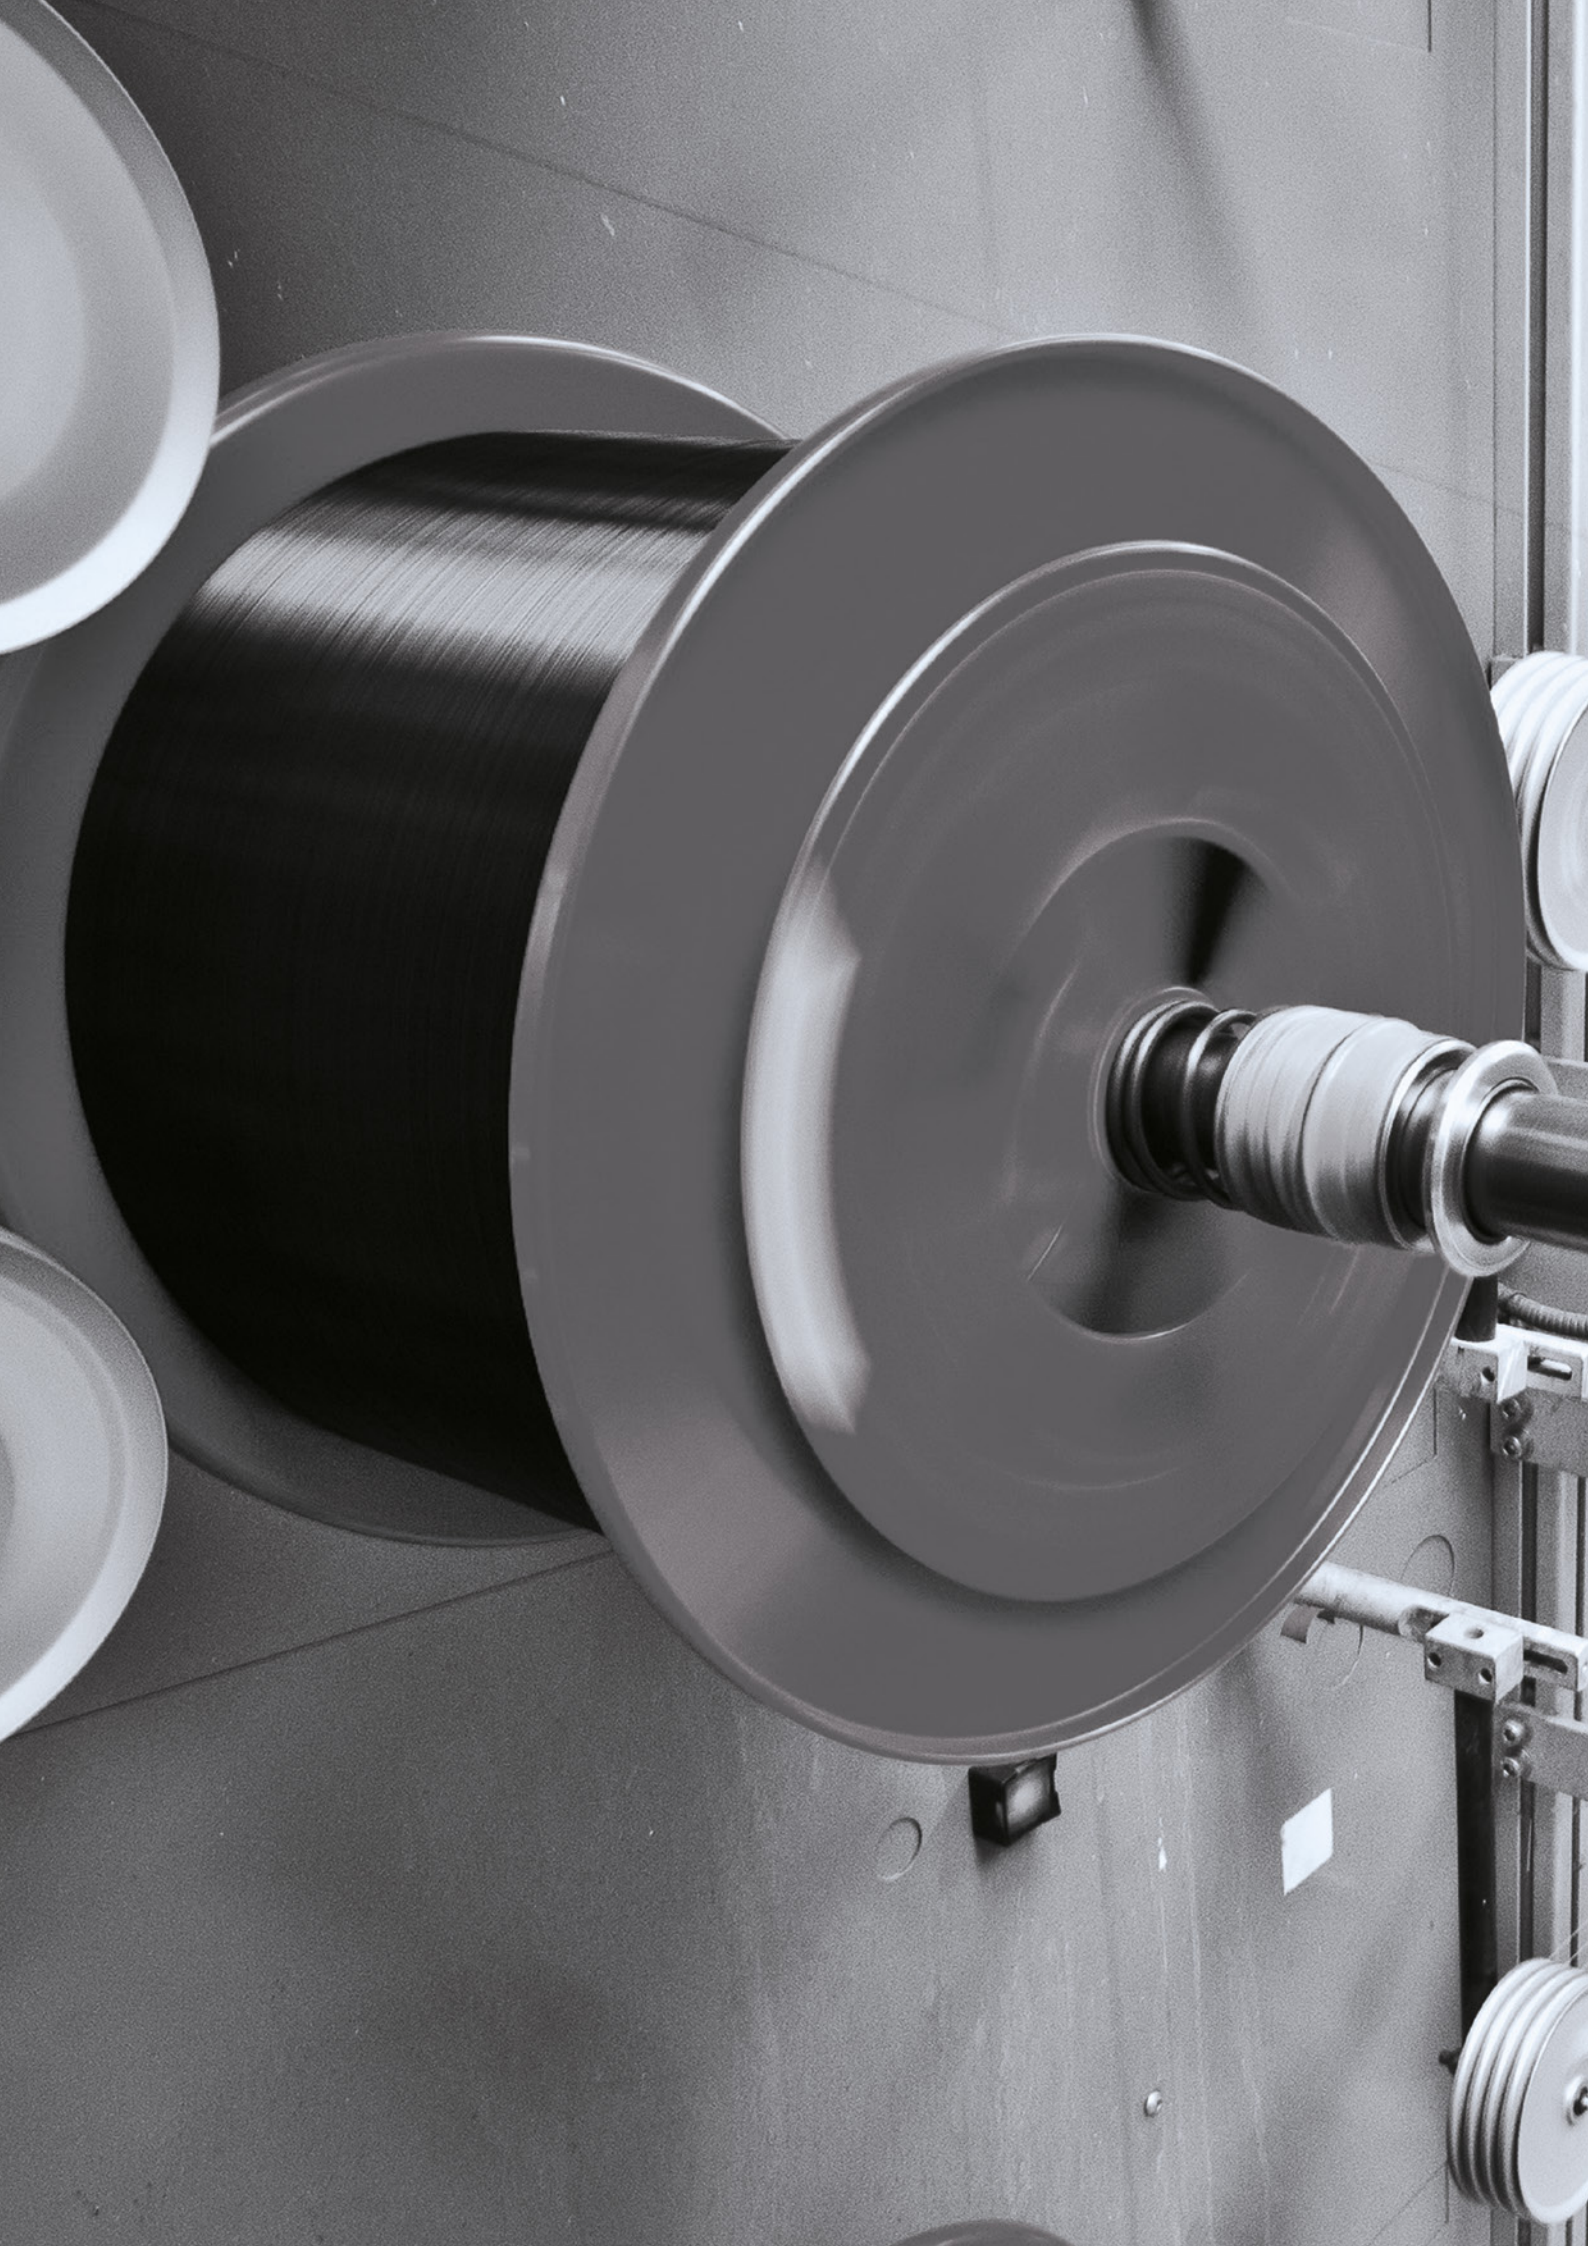



3. CLT CABLES

- STANDARD
- IMPROVED
- FRP
- CST SINGLE
- CST DOUBLE
- SWA
- MICRO

CLT STANDARD

Specification: AE00, BE00, AE02, BE02



Indoor




Outdoor



FTTx



Halogen free

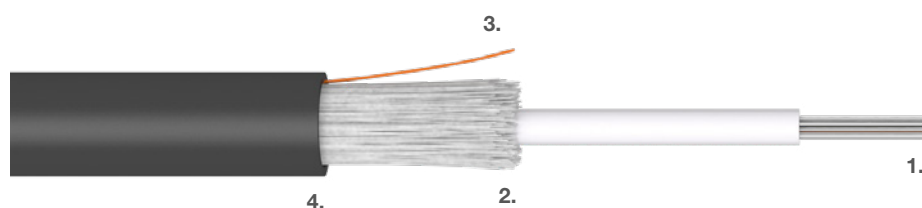

Description of materials:

- 1.** Gel filled PBT loose tube with optical fibers. **2.** Waterblocking E-glass yarn. **3.** Rip-Cord.
4. FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-20 to +70 °C
Storage	-20 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
AE00	12	2.5	5.4	27	1,100	2,000
BE00	24	3.0	5.8	31	1,100	2,000
AE02	12	2.5	5.4	35	1,100	2,000
BE02	24	3.0	6.4	48	1,100	2,000

CLT IMPROVED

Specification: AR00, BR00, AR02, BR02



Indoor



Outdoor




FTTx



Halogen free



High tensile

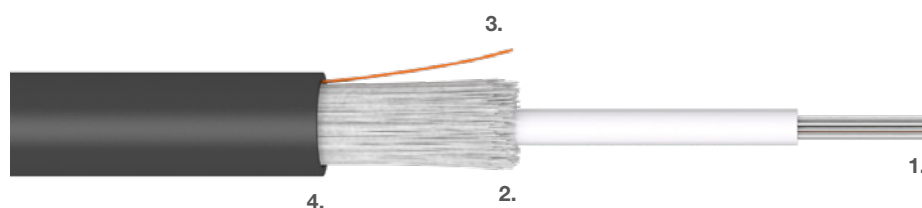

Description of materials:

1. Gel filled PBT loose tube with optical fibers.
2. Waterblocking E-glass yarn.
3. Rip-Cord.
4. FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-20 to +70 °C
Storage	-20 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
AR00	12	2.5	6.5	39	2,000	2,000
BR00	24	3.0	7.7	52	2,500	2,000
AR02	12	2.5	6.5	50	2,000	2,000
BR02	24	3.0	7.7	68	2,500	2,000

CLT FRP

Specification: BF01, BF02



Indoor



Outdoor



FTTx



Halogen free




Armoured



Dielectric



Direct
burial

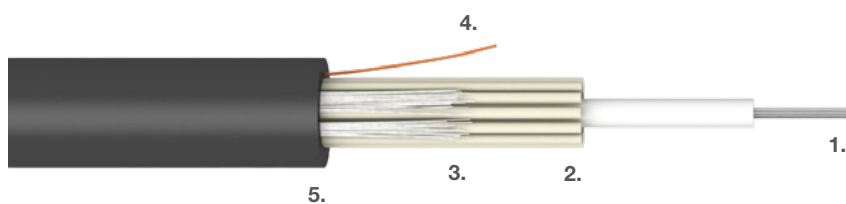

Description of materials:

1. Gel filled PBT loose tube with optical fibers. 2. FRP dielectric strength member.
3. Waterblocking E-glass yarn. 4. Rip-Cord. 5. FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation -15 to +50 °C

Operation -40 to +70 °C

Storage -40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
BF01	24	3.0	7.4	53	2,300	2,000
BF02	24	3.0	7.4	65	2,300	2,000

CLT CST

Specification: BH01, BH02, Z144, Z145



Indoor



Outdoor



FTTx



Halogen free




Armoured



Antirodent



Direct
burial

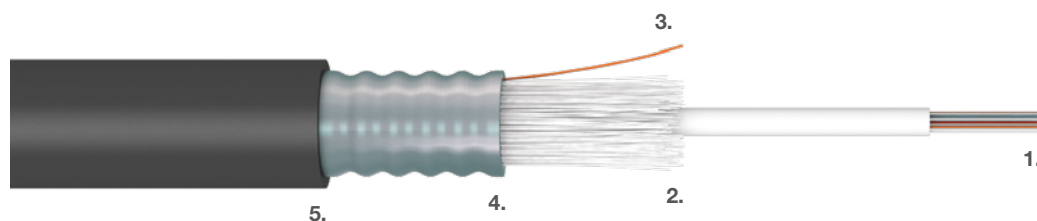

Description of materials:

- 1.** Gel filled PBT loose tube with optical fibers. **2.** Waterblocking E-glass yarn. **3.** Rip-Cord.
4. Corrugated steel tape. **5.** FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
BH01	24	3.0	9.9	98	2,500	6,000
BH02	24	3.0	10.1	120	2,500	6,000
Z144	24	3.0	7.7	70	1,100	5,000
Z145	24	3.0	7.9	87	1,100	3,000

CLT CST DOUBLE JACKET

Specification: BIPI, BIF2, BIP2



Indoor



Outdoor



FTTx



Halogen free




Armoured



Antirodent



Direct
burial

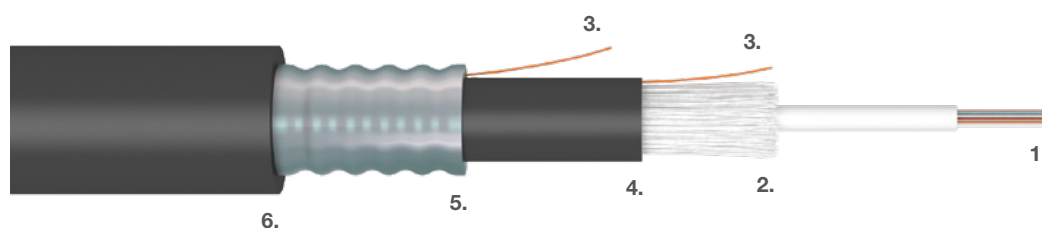

Description of materials:

- 1.** Gel filled PBT loose tube with optical fibres. **2.** Waterblocking E-glass yarn. **3.** Rip-Cord.
4. FR-LSZH or PE inner jacket. **5.** Corrugated steel tape. **6.** FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
BIPI	24	3.0	10.5	106	1,100	6,000
BIF2	24	3.0	10.5	138	1,100	6,000
BIP2	24	3.0	10.5	131	1,100	6,000

CLT SWA

Specification: BWPI, BWP2, BWFI, BWF2

Indoor

Outdoor


FTTx

Halogen free

Armoured

Antirodent

Direct burial

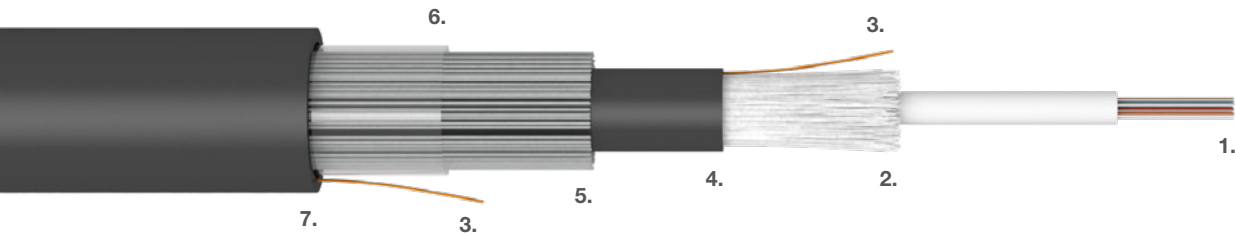

Description of materials:

- 1. Gel filled PBT loose tube with optical fibers. 2. Waterblocking E-glass yarn. 3. Rip-Cord.
- 4. FR-LSZH or PE inner jacket. 5. Steel Wire Armour (SWA). 6. Water-swellable tape.
- 7. FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-30 to +70 °C
Storage	-30 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
BWPI	24	3.0	11.0	199	4,000	4,000
BWP2	24	3.0	11.0	208	4,000	4,000
BWFI	24	3.0	11.0	231	4,000	4,000
BWF2	24	3.0	10.0	222	4,000	4,000

CLT MICRO

Specification: Z044, Z008, Z006, Z238



Indoor



Outdoor



FTTx



Halogen free



Duct



Air blown



Description of materials:

1. Optical fibres. **2.** Gell filled PBT loose tube. **3.** Low Friction Polymer.


Temperature range

Installation	-5 to +50 °C
Operation	-20 to +70 °C
Storage	-20 to +70 °C


Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z044	4	2.0	2.0	4	70	1,000
Z008	12	2.5	2.5	6	70	1,000
Z006	12	2.8	2.8	8	70	1,000
Z238	24	3.2	3.2	11	250	1,000

CLT MICRO


Specification: AL00, Z339, Z366




Outdoor




FTTx



Duct



Air blown

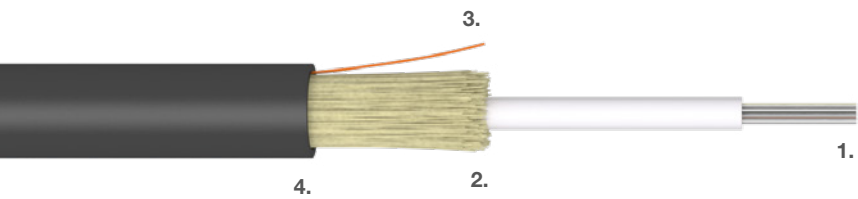

Description of materials:

- 1. Gel filled PBT loose tube with optical fibers.
- 2. Waterblocking aramid yarn.
- 3. Rip-Cord.
- 4. PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-20 to +70 °C
Storage	-20 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
AL00	12	2.3	3.4	10	250	1,000
Z339	12	1.7	2.5	5	90	700
Z366	24	2.5	3.5	10	90	700





4. MLT CABLES

- MICROCABLES
- STANDARD
- IMPROVED
- CST
- SWA
- ADSS
- FIG. 8

MICROCABLES

Specification: Z019, TM01, TM02, QM01, QM02, WM01, WM02, Z202, Z108



Indoor



Outdoor



FTTx




Halogen free



Air blown



Duct

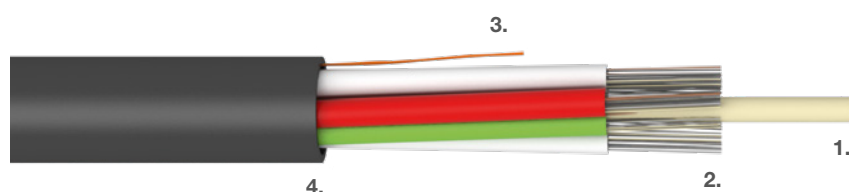

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Rip-Cord. **4.** FR-LSZH or PE outer jacket, UV stable.


Temperature range

Installation	-15 to +50 °C
Operation	-30 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z019	60	1.5	5.2	22	250	1,500
TM01	72	1.5	5.8	29	700	1,500
TM02	72	1.5	6.8	49	700	1,500
QM01	96	1.5	6.5	40	1,400	1,500
QM02	96	1.5	7.5	62	1,400	1,500
WM01	144	1.5	8.6	62	1,500	1,500
WM02	144	1.5	9.6	91	1,500	1,500
Z202	144	1.5	7.1	43	450	1,500
Z108	192	1.5	8.0	53	700	1,500

MICROCABLES

Specification: Z049

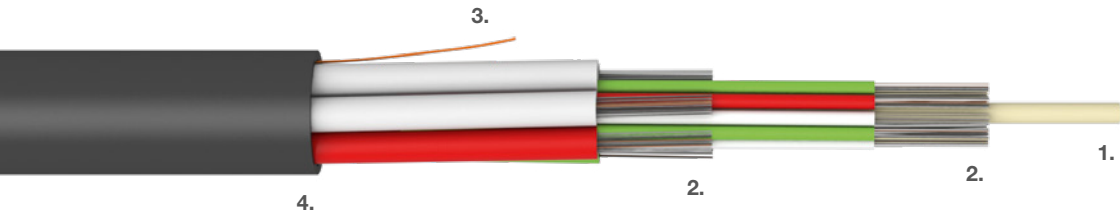

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Rip-Cord. **4.** PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-30 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z049	288	1.5	10.2	87	1,100	1,500

MICROCABLES

Specification: UM01, UM02, CM01, CM02, PM01, PM02, RM01, RM02, VM01, VM02



Indoor



Outdoor



FTTx




Halogen free



Air blown



Duct

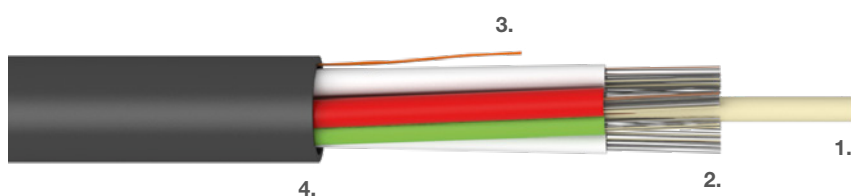

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Rip-Cord. **4.** FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
UM01	60	1.7	5.7	27	320	1,500
UM02	60	1.7	6.7	53	320	1,500
CM01	72	1.7	6.2	33	680	1,500
CM02	72	1.7	7.2	61	680	1,500
PM01	96	1.7	7.4	50	2,400	1,500
PM02	96	1.7	8.4	84	2,400	1,500
RM01	144	1.7	9.6	76	2,200	1,500
RM02	144	1.7	10.6	119	2,200	1,500
VM01	216	1.7	9.5	72	1,000	900
VM02	216	1.7	10.5	105	1,000	900

MICROCABLES

Specification: DM01, DM02, KM01, KM02, SM01, SM02

Indoor


Outdoor

FTTx

Halogen free

Air blown

Duct

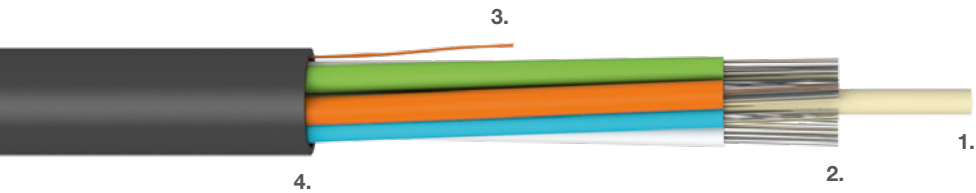

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Rip-Cord. **4.** FR-LSZH or PE outer jacket, UV stable.

Temperature range


Installation	-15 to +50 °C
Operation	-30 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
DM01	144	2.5	8.7	58	200	1,000
DM02	144	2.5	9.7	87	200	1,000
KM01	192	2.5	10.2	83	1,000	1,000
KM02	192	2.5	11.2	117	1,000	1,000
SM01	288	2.5	13.3	138	1,500	1,000
SM02	288	2.5	14.3	182	1,500	1,000

MICROCABLES 200μm

Specification: Z393, Z024, Z045, Z025

Outdoor
 FTTx
 Halogen free
 Air blown
 Duct

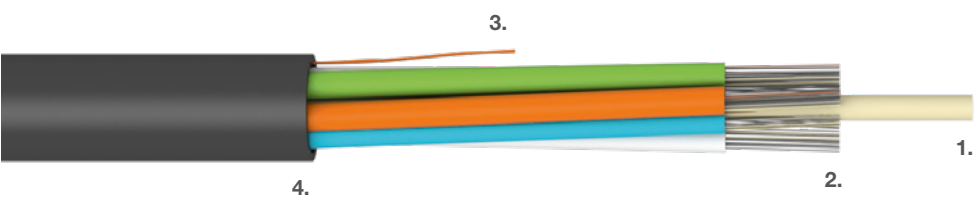

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with up to 24 200μm optical fibers.
- 3.** Rip-Cord. **4.** PE outer jacket, UV stable.

Temperature range

Installation	-5 to +50 °C
Operation	-20 to +60 °C
Storage	-20 to +60 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z393	96	1.7	5.2	27	500	50
Z024	144	1.7	6.2	34	700	1,500
Z045	192	1.7	7.4	47	900	1,500
Z025	288	1.7	9.6	79	2,500	1,500

MICROCABLES 200µm

Specification: Z436, Z437, Z022

Outdoor


FTTx

Halogen free

Air blown

Duct

High count

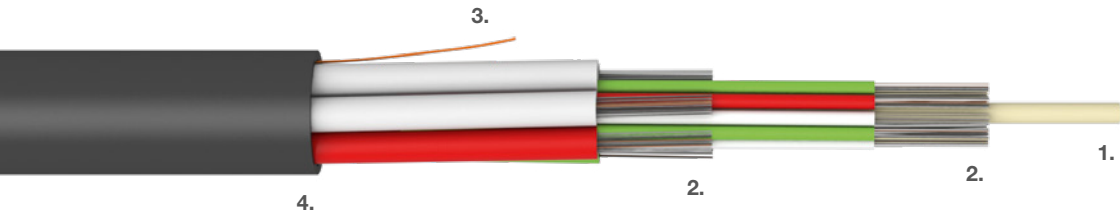

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with up to 24 200µm optical fibers. **3.** Rip-Cord. **4.** PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-30 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z436	432	1.7	9.8	81	500	500
Z437	576	1.7	11.4	109	800	500
Z022	864	1.7	14.4	165	700	1,000

MLT STANDARD

Specification: Z022, Z304



Indoor



Outdoor



Halogen free




Air blown



Duct



High count

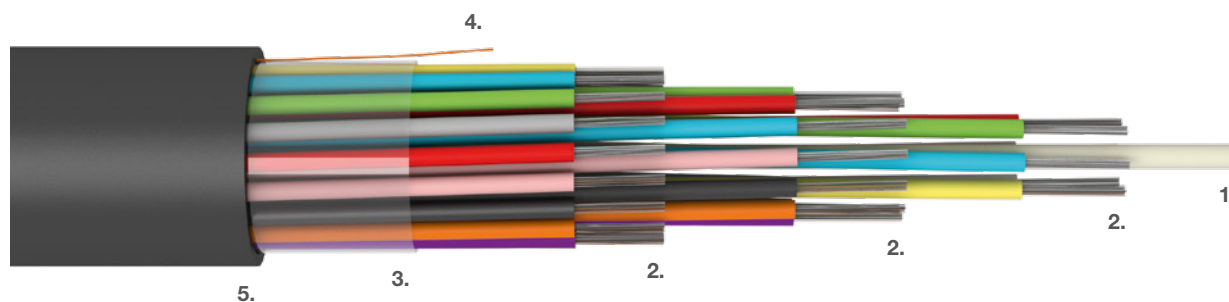

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibres.
3. Water-swellable tape. **4.** Rip-Cord. **5.** FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z022	432	1.7	14.4	157	700	1,000
Z304	432	1.7	15.4	216	700	1,000

MLT STANDARD

Specification: Z349, Z350

Indoor


Outdoor

Halogen free

Air blown

Duct

High count

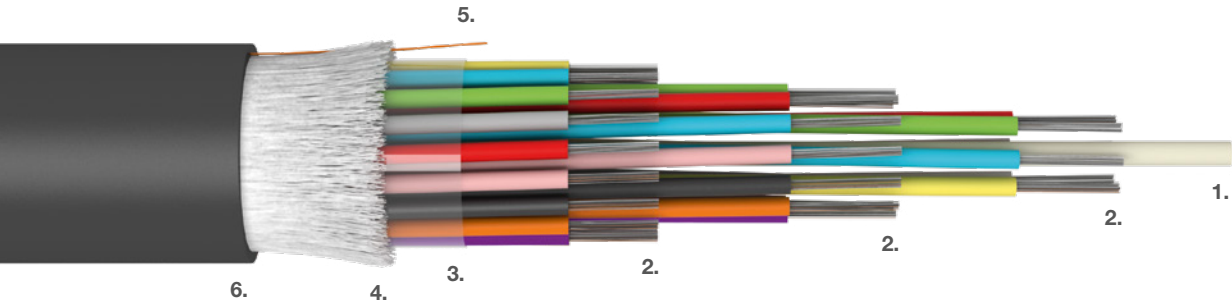

Description of materials:

- 1. FRP dielectric central strength member. 2. Gel filled PBT loose tube with optical fibers.
- 3. Water-swellable tape. 4. Waterblocking E-glass yarn. 5. Rip-Cord. 6. FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-30 to +70 °C
Storage	-30 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z349	864	2.5	21.7	353	4,700	2,000
Z350	864	2.5	21.7	407	4,500	2,000

MLT STANDARD

Specification: UE01, UE02, CE01, CE02, PE01, PE02, RE01, RE02, VE01, VE02



Indoor



Outdoor




Halogen free



FTTx



Duct

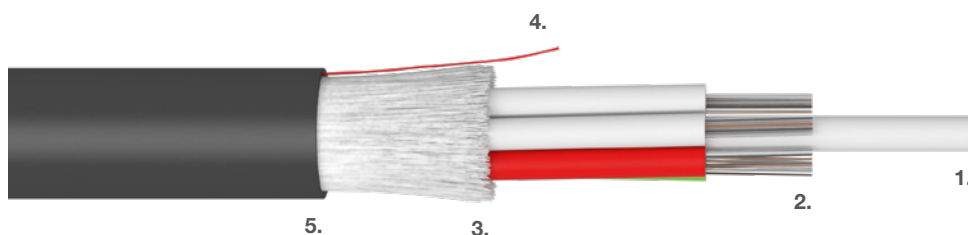

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Waterblocking E-glass yarn. **4.** Rip-Cord. **5.** FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
UE01	60	1.7	8.3	58	1,300	2,000
UE02	60	1.7	8.3	75	1,300	2,000
CE01	72	1.7	8.8	67	2,000	2,000
CE02	72	1.7	8.8	86	2,000	2,000
PE01	96	1.7	10.0	90	4,300	2,000
PE02	96	1.7	10.0	111	4,300	2,000
RE01	144	1.7	12.2	127	7,300	2,000
RE02	144	1.7	12.2	154	7,300	2,000
VE01	216	1.7	11.9	117	2,200	2,000
VE02	216	1.7	11.9	146	2,200	2,000

MLT STANDARD

Specification: LE01, LE02, FE01, FE02, GE01, GE02, HE01, HE02, IE00, IE02



Indoor



Outdoor




Halogen free



FTTx



Duct

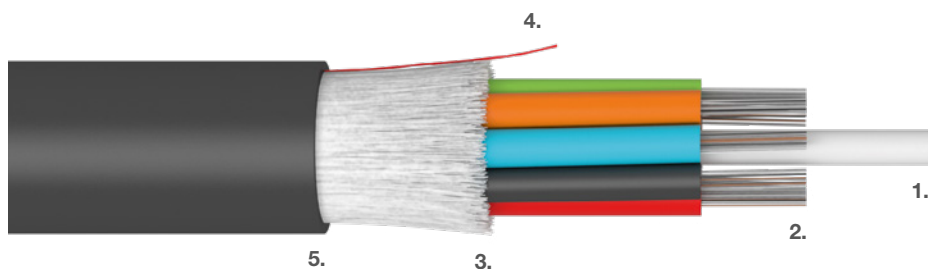

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Waterblocking E-glass yarn. **4.** Rip-Cord. **5.** FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
LE01	48	2.3	8.9	63	1,000	2,000
LE02	48	2.3	8.9	83	1,000	2,000
FE01	72	2.3	10.6	89	1,900	2,000
FE02	72	2.3	10.6	112	1,900	2,000
GE01	96	2.3	11.9	113	2,500	2,000
GE02	96	2.3	11.9	141	2,500	2,000
HE01	144	2.3	14.8	170	4,000	2,000
HE02	144	2.3	14.8	206	4,000	2,000
IE00	216	2.3	15.6	223	3,300	2,000
IE02	216	2.3	15.6	223	3,300	2,000

MLT STANDARD

Specification: Z438



Indoor




Outdoor



FTTx



Duct

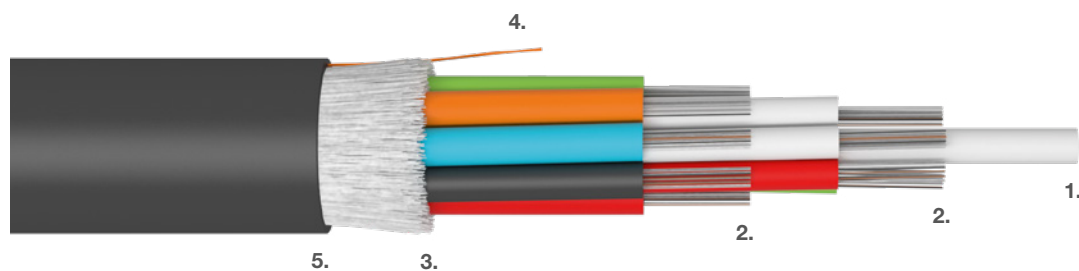

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Waterblocking E-glass yarn. **4.** Rip-Cord. **5.** PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-20 to +70 °C
Storage	-20 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z438	288	1.7	13.2	144	3,200	1,000

MLT STANDARD

Specification: Z090, Z182


Indoor

Outdoor

Halogen free

FTTx

Duct

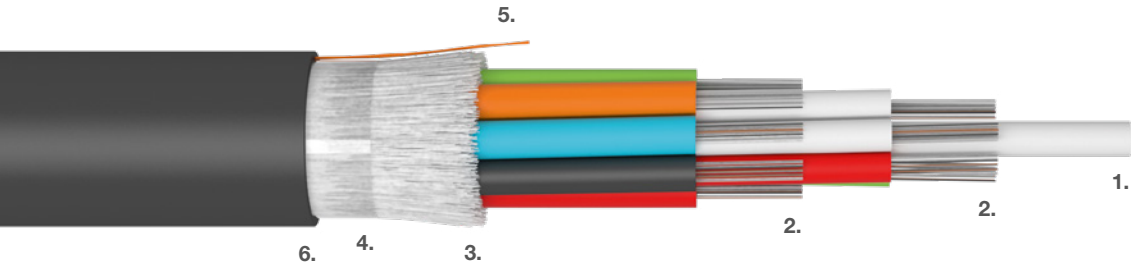

Description of materials:

- 1.** FRP dielectric central strength member.
- 2.** Gel filled PBT loose tube with optical fibers.
- 3.** Waterblocking E-glass yarn.
- 4.** Water-swellable tape.
- 5.** Rip-Cord.
- 6.** FR-LSZH or PE outer jacket, UV stable.



Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z090	288	2.3	17.7	236	4,400	2,000
Z182	288	2.3	17.7	279	4,400	2,000

MLT STANDARD

Specification: DE01, DE02, KE01, KE02, SE01, SE02

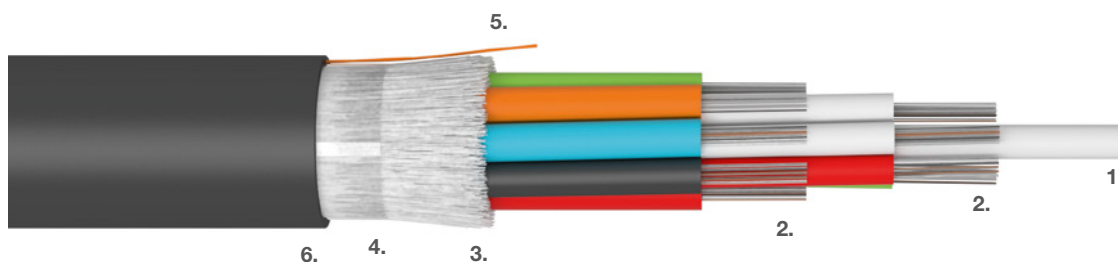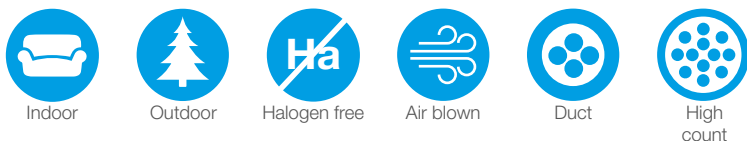

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Waterblocking E-glass yarn. **4.** Water-swellaable tape. **5.** Rip-Cord. **6.** FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-30 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
DE01	144	2.5	11.7	73	2,000	1,500
DE02	144	2.5	11.7	102	2,000	1,500
KE01	192	2.5	13.1	98	3,200	1,500
KE02	192	2.5	13.1	132	3,200	1,500
SE01	288	2.5	16.2	157	5,200	1,500
SE02	288	2.5	16.2	201	5,200	1,500

MLT IMPROVED

Specification: CR01, CR02, PR01, PR02, RR01, RR02, VR01, VR02



Indoor



Outdoor



Halogen free




FTTx



Duct



High tensile

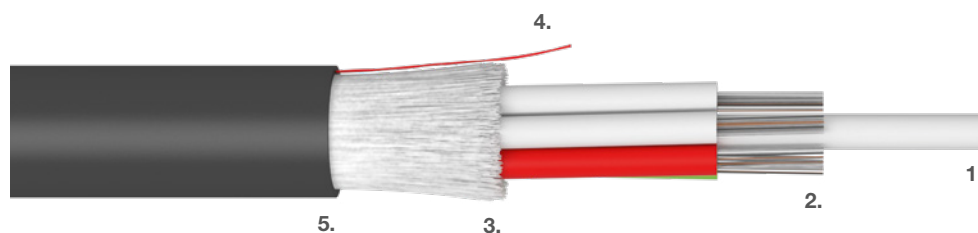

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Waterblocking E-glass yarn. **4.** Rip-Cord. **5.** FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
CR01	72	1.7	9.6	83	3,700	2,000
CR02	72	1.7	9.4	101	3,700	2,000
PR01	96	1.7	10.8	108	7,300	2,000
PR02	96	1.7	10.8	130	7,300	2,000
RR01	144	1.7	12.8	150	11,500	2,000
RR02	144	1.7	12.8	179	11,500	2,000
VR01	216	1.7	12.4	133	4,000	2,000
VR02	216	1.7	12.4	166	4,000	2,000

MLT IMPROVED

Specification: LR01, LR02, FR01, FR02, GR01, GR02, HR01, HR02



Indoor



Outdoor



Halogen free




FTTx



Duct



High tensile

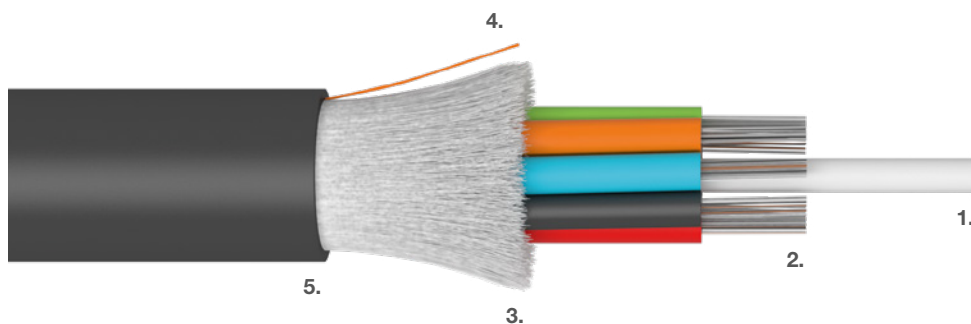

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Waterblocking E-glass yarn. **4.** Rip-Cord. **5.** FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
LR01	48	2.3	9.5	75	2,000	2,000
LR02	48	2.3	9.5	95	2,000	2,000
FR01	72	2.3	10.9	100	3,200	2,000
FR02	72	2.3	10.9	124	3,200	2,000
GR01	96	2.3	12.4	133	5,500	2,000
GR02	96	2.3	12.4	161	5,500	2,000
HR01	144	2.3	15.4	199	10,000	2,000
HR02	144	2.3	15.4	235	10,000	2,000

MLT IMPROVED

Specification: IR01, IR02

Indoor


Outdoor

Halogen free

FTTx

Duct

High tensile

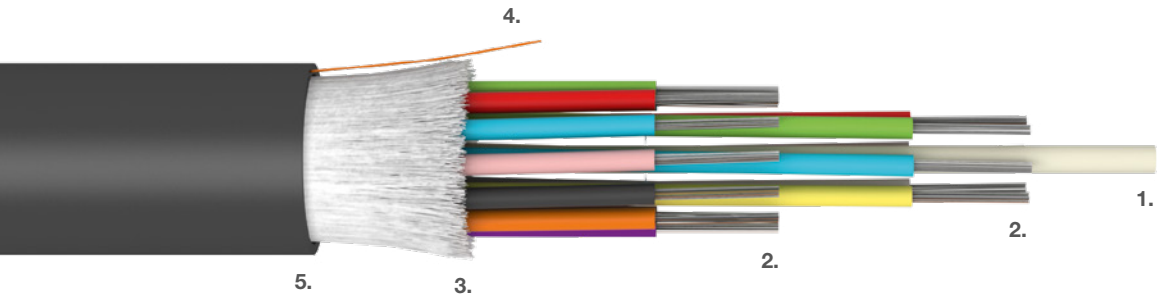

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Waterblocking E-glass yarn. **4.** Rip-Cord. **5.** FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
IR01	216	2.3	15.8	201	6,000	2,000
IR02	216	2.3	15.8	242	6,000	2,000

MLT CST

Specification: CH01, CH02, PH01, PH02, RH01, RH02



Indoor



Outdoor



Halogen free




Armoured



Direct burial



Antirodent

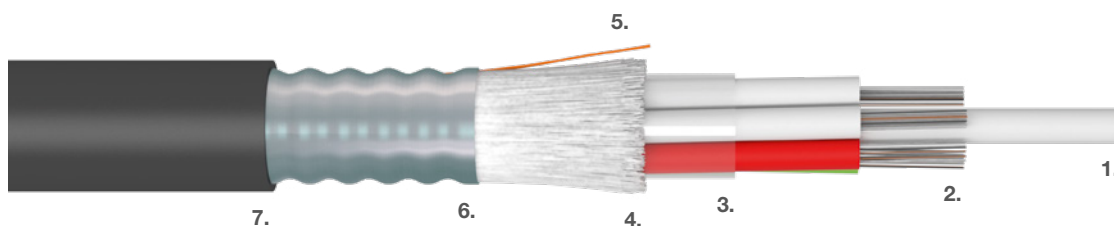

Description of materials:

1. FRP dielectric central strength member. 2. Gel filled PBT loose tube with optical fibers.
3. Water-swellable tape. 4. Waterblocking E-glass yarn. 5. Rip-Cord. 6. Corrugated steel tape.
7. FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
CH01	72	1.7	10.1	107	1,800	3,500
CH02	72	1.7	10.1	127	1,800	2,000
PH01	96	1.7	12.1	141	3,800	2,000
PH02	96	1.7	12.1	165	3,800	2,000
RH01	144	1.7	14.1	186	5,600	3,500
RH02	144	1.7	14.1	216	5,600	2,000

MLT CST

Specification: LH01, LH02, FH01, FH02, GH01, GH02, HH01, HH02



Indoor



Outdoor



Halogen free




Armoured



Direct burial



Antirodent

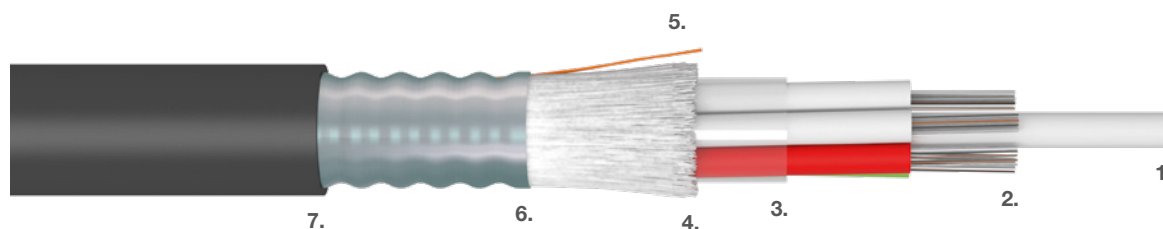

Description of materials:

1. FRP dielectric central strength member. 2. Gel filled PBT loose tube with optical fibers.
3. Water-swellable tape. 4. Waterblocking E-glass yarn. 5. Rip-Cord. 6. Corrugated steel tape.
7. FR-LSZH or PE outer jacket, UV stable.


Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C


Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
LH01	48	2.3	11.5	125	1,200	4,500
LH02	48	2.3	11.5	151	1,200	2,500
FH01	72	2.3	12.5	150	2,100	4,500
FH02	72	2.3	12.5	178	2,100	10,000
GH01	96	2.3	14.5	186	2,600	4,500
GH02	96	2.3	14.5	219	2,600	2,500
HH01	144	2.3	16.5	250	4,500	10,000
HH02	144	2.3	16.5	289	4,500	10,000

MLT CST


Specification: VH01, VH02




Indoor




Outdoor




Halogen free




Armoured



Direct burial



Antirodent

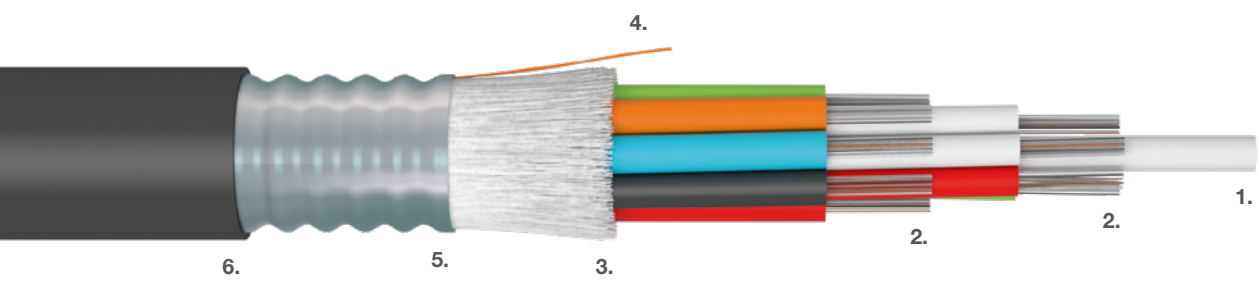

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
- 3.** Waterblocking E-glass yarn. **4.** Rip-Cord. **5.** Corrugated steel tape. **6.** FR-LSZH or PE outer jacket, UV stable.


Temperature range

Installation	-15 to +50 °C
Operation	-45 to +70 °C
Storage	-45 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
VH01	216	1.7	14.5	195	2,200	6,000
VH02	216	1.7	14.5	228	2,200	6,000

MLT CST DOUBLE JACKET

Specification: LIPI, LIP2, LIF2, FIPI, FIP2, FIF2

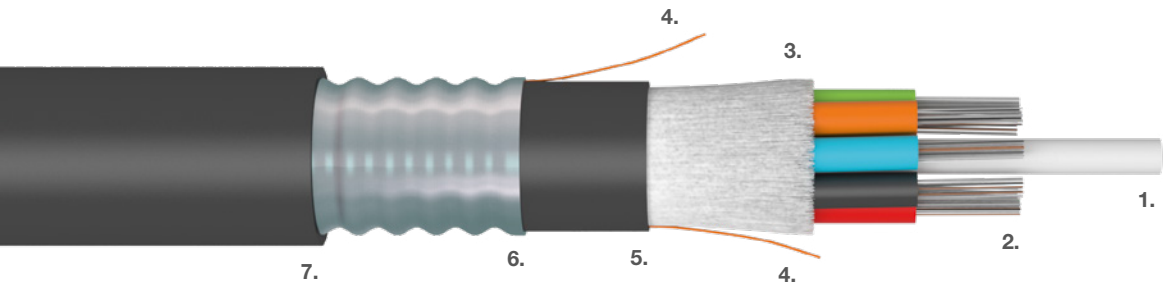

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Waterblocking E-glass yarn. **4.** Rip-Cord. **5.** FR-LSZH or PE inner jacket.
6. Corrugated steel tape. **7.** FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-45 to +70 °C
Storage	-45 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
LIPI	48	2.3	13.5	166	1,500	6,000
LIP2	48	2.3	13.5	196	1,500	4,000
LIF2	48	2.3	13.5	209	1,500	4,000
FIPI	72	2.3	14.5	197	3,000	6,000
FIP2	72	2.3	14.5	230	3,000	4,000
FIF2	72	2.3	14.5	246	3,000	4,000

MLT CST DOUBLE JACKET

Specification: GIPI, GIF2, HIPI, HIF2



Indoor



Outdoor



Halogen free




Armoured



Direct burial



Antirodent

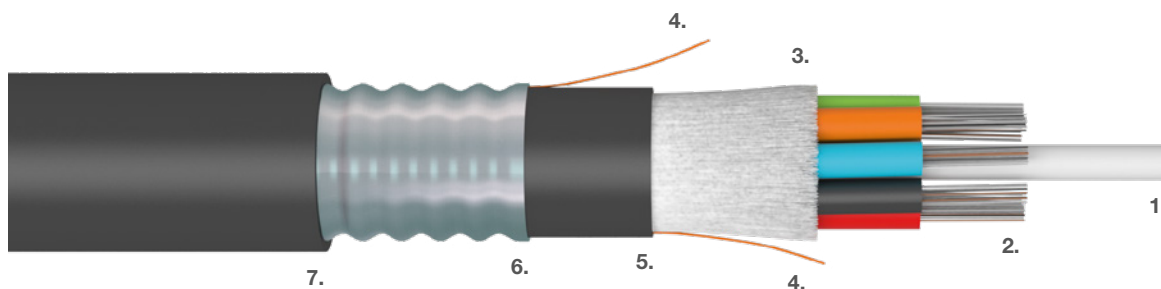

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
- 3.** Waterblocking E-glass yarn. **4.** Rip-Cord. **5.** FR-LSZH or PE inner jacket.
- 6.** Corrugated steel tape. **7.** FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-45 to +70 °C
Storage	-45 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
GIPI	96	2.3	16.5	240	4,000	6,000
GIF2	96	2.3	16.5	296	4,800	10,000
HIPI	144	2.3	19.5	323	7,000	6,000
HIF2	144	2.3	19.5	391	7,000	4,000

MLT SWA

Specification: LWPI, LWF2, FWPI, FWF2, GWPI, GWF2, HWPI, HWF2



Indoor



Outdoor



Halogen free




Armoured



Direct burial



High tensile

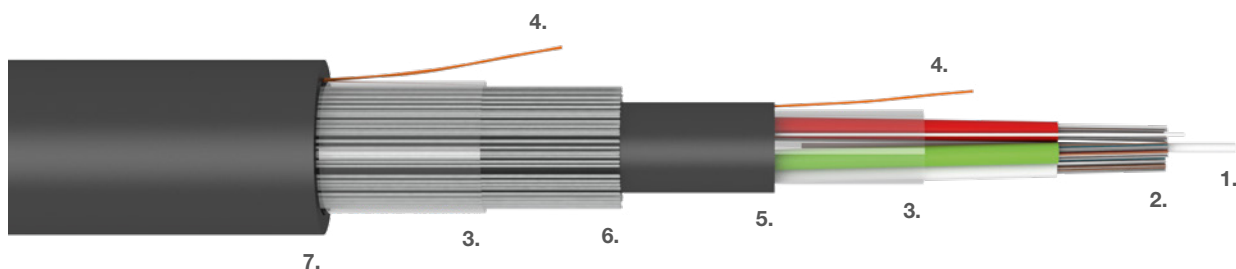

Description of materials:

1. FRP dielectric central strength member. 2. Gel filled PBT loose tube with optical fibers.
3. Water-swellable tape. 4. Rip-Cord. 5. FR-LSZH or PE inner jacket. 6. Steel Wire Armour (SWA).
7. FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
LWPI	48	2.3	13.2	278	4,000	4,500
LWF2	48	2.3	13.2	317	4,000	4,500
FWPI	72	2.3	14.7	334	6,500	4,500
FWF2	72	2.3	14.7	380	6,500	4,500
GWPI	96	2.3	16.0	392	7,500	4,500
GWF2	96	2.3	16.0	442	7,500	4,500
HWPI	144	2.3	18.9	516	8,500	4,500
HWF2	144	2.3	18.9	579	8,500	4,500

ADSS

Specification: ASOI, Z159, Z194




Outdoor



Dielectric



Aerial

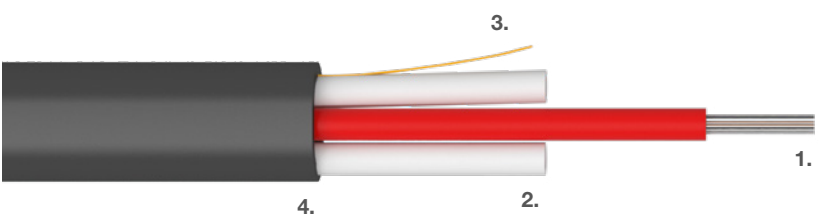

Description of materials:

- 1.** Gel filled PBT loose tube with optical fibers. **2.** FRP periferal strength member.
- 3.** Rip-Cord. **4.** PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
ASOI	12	2.0	4.2 × 7.8	36	1,600	4,000
Z159	24	1.7	9.1 × 3.8	36	1,300	4,000
Z194	48	3.5	12.5 × 5.5	75	2,500	2,500

ADSS – Light 2.6 kN

Specification: N3HI, N4HI, N5HI, N6HI



Outdoor




Duct



Dielectric



Aerial

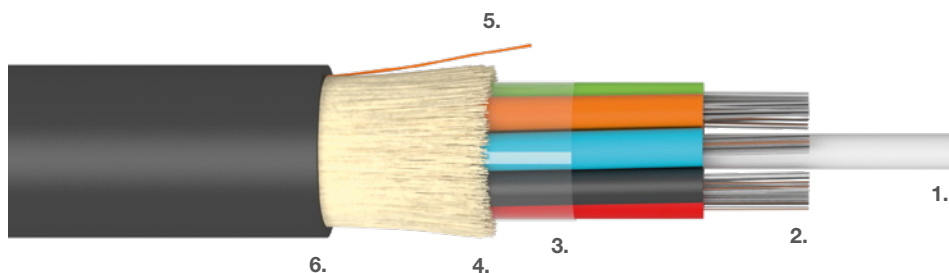

Description of materials:

- 1.** FRP dielectric central strenght member. **2.** Gel filled PBT loose tube with optical fibers.
3. Water-swellable tape. **4.** Waterblocking aramid yarn. **5.** Rip-Cord. **6.** PE outer jacket, UV stable.



Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
N3HI	48	2.0	8.9	63	3,000	1,500
N4HI	72	2.0	9.8	80	3,000	1,500
N5HI	96	2.0	11.2	100	3,000	1,500
N6HI	144	2.0	13.6	145	3,000	1,500

ADSS 3 kN

Specification: N3XI, N4XI, N5XI, N6XI

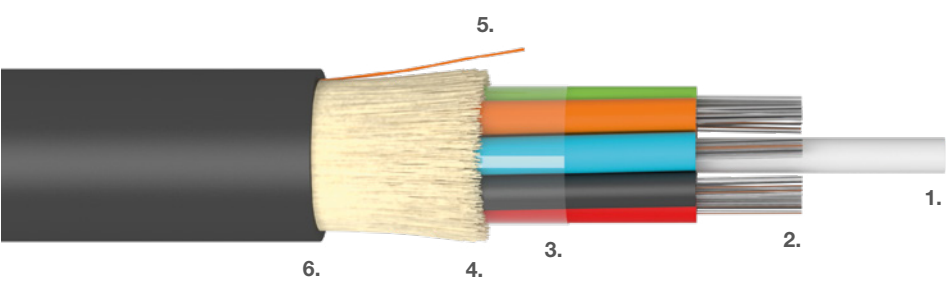

Description of materials:

- 1.** FRP dielectric central strenght member. **2.** Gel filled PBT loose tube with optical fibers.
- 3.** Water-swellable tape. **4.** Waterblocking aramid yarn. **5.** Rip-Cord. **6.** PE outer jacket, UV stable.



Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
N3XI	48	2.5	10.2	81	3,000	3,000
N4XI	72	2.5	11.9	112	3,000	3,000
N5XI	96	2.5	13.3	135	3,000	3,000
N6XI	144	2.5	16.4	203	3,000	3,000

ADSS 6 kN

Specification: N3YI, N4YI, N5YI, N6YI

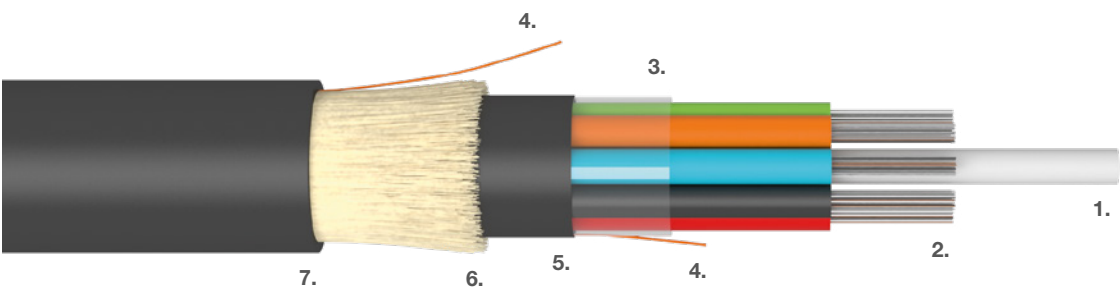

Description of materials:

- 1.** FRP dielectric central strenght member. **2.** Gel filled PBT loose tube with optical fibers.
3. Water-swellable tape. **4.** Rip-Cord. **5.** PE inner jacket. **6.** Waterblocking aramid yarn.
7. PE outer jacket, UV stable.


Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
N3YI	48	2.5	12.2	115	6,000	3,000
N4YI	72	2.5	13.8	159	6,000	3,000
N5YI	96	2.5	15.3	178	6,000	3,000
N6YI	144	2.5	18.4	268	6,000	3,000

ADSS 10 kN

Specification: N4ZI, N5ZI, N6ZI, N9ZI

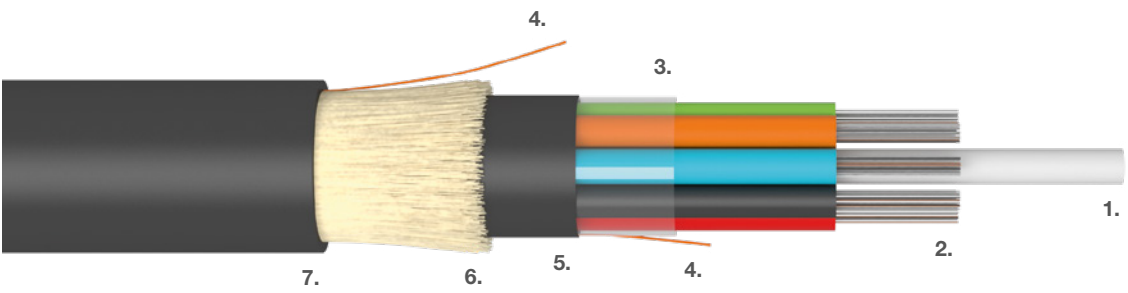

Description of materials:

1. FRP dielectric central strenght member. **2.** Gel filled PBT loose tube with optical fibers. **3.** Water-swellable tape. **4.** Rip-Cord. **5.** PE inner jacket. **6.** Waterblocking aramid yarn. **7.** PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
N4ZI	72	2.8	15.5	195	10,000	3,000
N5ZI	96	2.8	17.0	225	10,000	3,000
N6ZI	144	2.8	20.5	316	10,000	3,000
N9ZI	288	2.5	22.2	367	10,000	3,000

ADSS 15 kN

Specification: N4RI, N5RI, N6RI, N7RI, N7SI



Outdoor



Duct




Dielectric



Aerial



High tensile

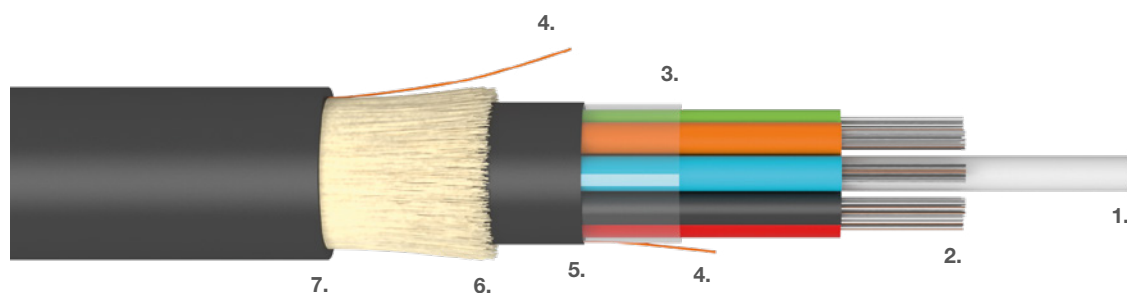

Description of materials:

1. FRP dielectric central strenght member. **2.** Gel filled PBT loose tube with optical fibers. **3.** Water-swellable tape. **4.** Rip-Cord. **5.** PE inner jacket. **6.** Waterblocking aramid yarn. **7.** PE outer jacket, UV stable.

Temperature range

Installation -15 to +50 °C

Operation -40 to +70 °C

Storage -40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
N4RI	72	2.8	15.6	203	15,000	3,000
N5RI	96	2.8	17.1	237	15,000	3,000
N6RI	144	2.8	20.6	339	15,000	3,000
N7RI	216	2.8	20.9	337	15,000	3,000
N7SI	216	2.8	19.0	281	15,000	3,000

FIG.8

Specification: A860, A862, Z187



Indoor




Outdoor



Halogen free



Aerial

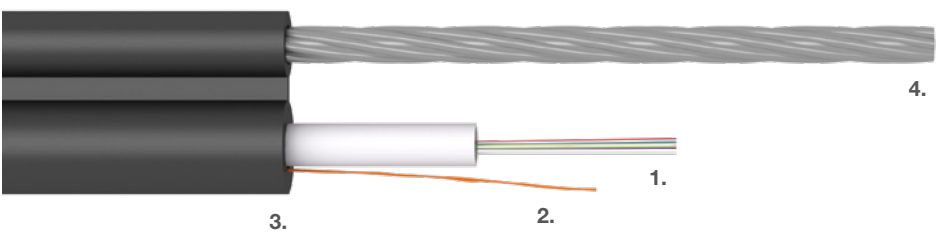

Description of materials:

- 1. Gel filled PBT loose tube with optical fibers.
- 2. Rip-Cord.
- 3. FR-LSZH or PE outer jacket, UV stable.
- 4. Steel wire messenger.

Temperature range


Installation	-15 to +50 °C
Operation	-30 to +70 °C
Storage	-30 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
A860	12	2.5	6.1 × 11.7	57	1,000	1,000
A862	12	2.5	6.1 × 11.7	80	1,000	1,000
Z187	24	4.5	8.5 × 18.0	140	3,000	2,000

FIG.8

Specification: L83A, F83A, G83A, H83A



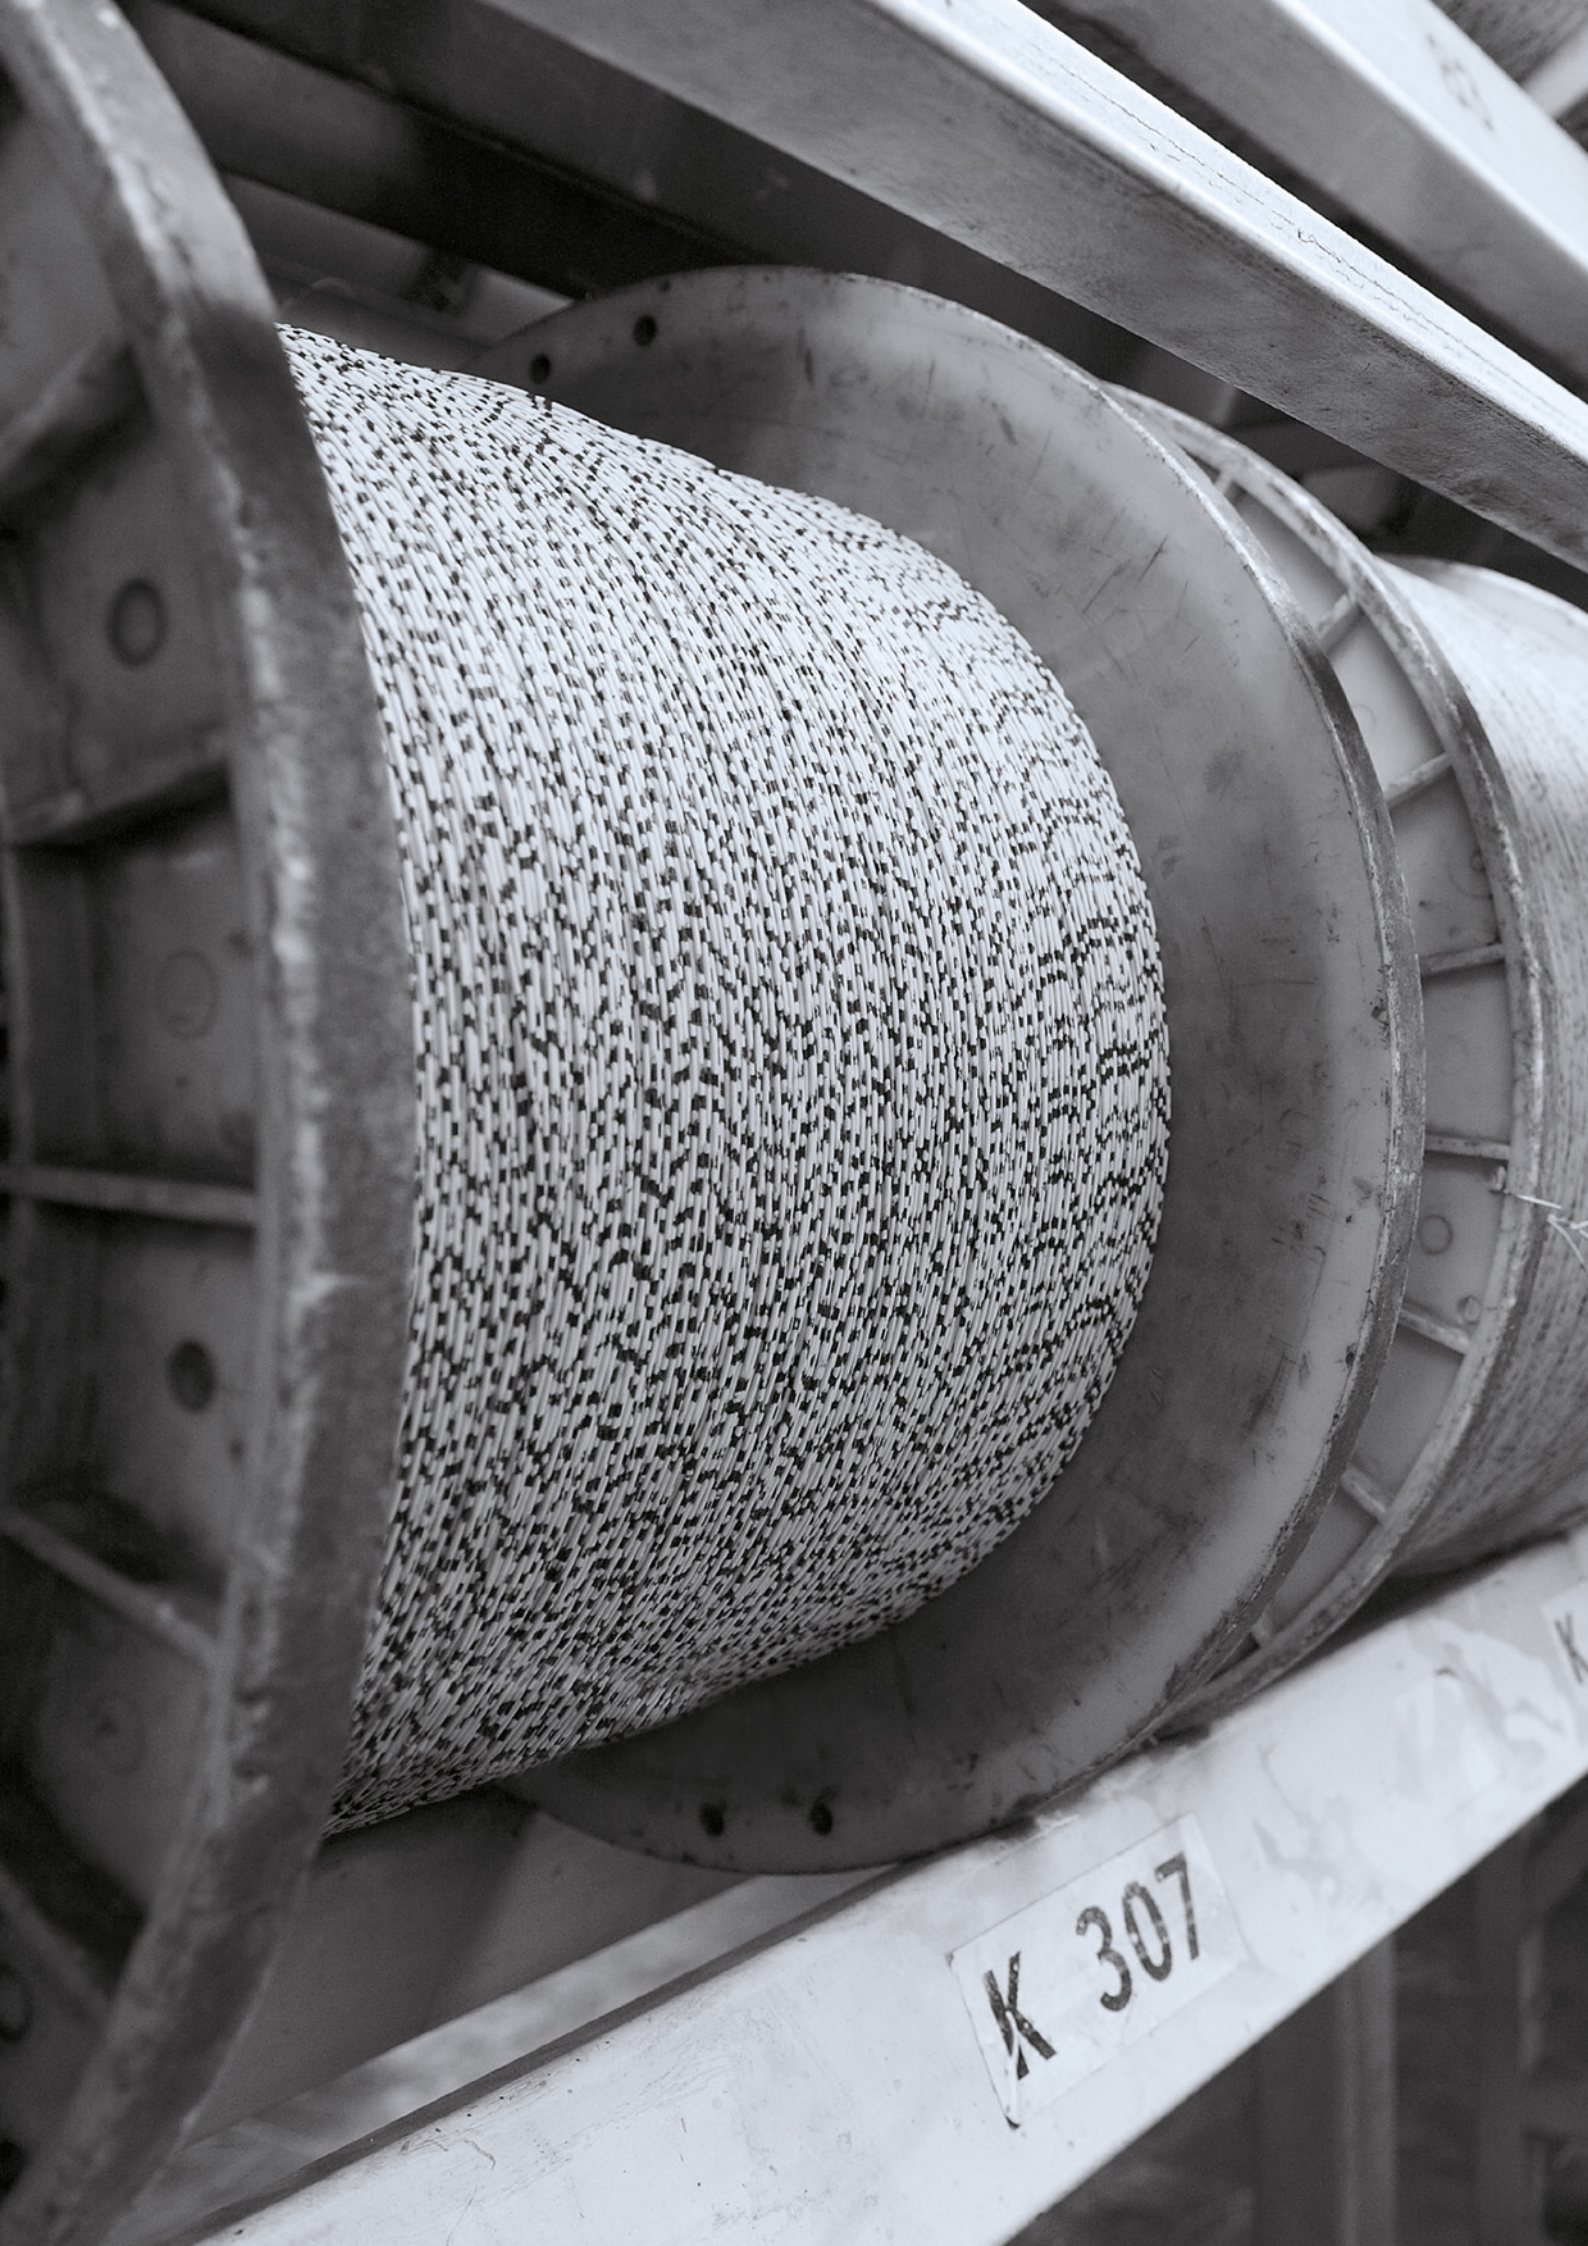

K 307

5. SPECIAL CABLES

- FIRE RESISTANT 🔥
- CPR 🔥
- TUNNELS AND SUBWAY
- HYBRID
- UNDERWATER
- ARMoured MICRODUCT
- FLES TUBE
- TRACER WIRE

FIRE RESISTANT – FSC 90 min.

Specification: CLT – Z297; MLT – Z298, Z299, Z300



Indoor



Outdoor



Halogen free



Armoured




Duct



Fire resistant



Antirodent

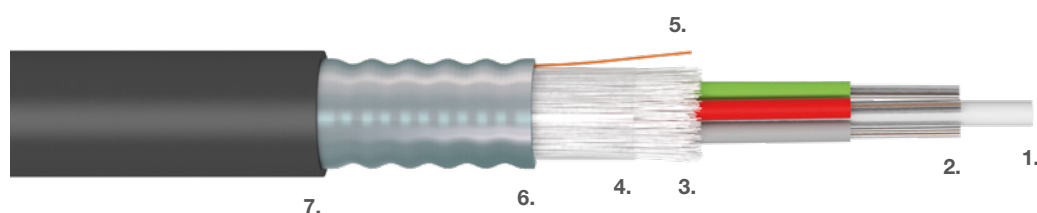

Description of materials:

1. FRP dielectric central strenght member. 2. Gel filled PBT loose tube with optical fibers.
3. Waterblocking E-glass yarn. 4. Water-swellaable tape. 5. Rip-Cord. 6. Corrugated steel tape.
7. FR-LSZH outer jacket, UV stable.

Temperature range	Z297	Z298, Z299, Z300
Installation	-15 to +50 °C	-15 to +50 °C
Operation	-30 to +70 °C	-40 to +70 °C
Storage	-30 to +70 °C	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z297	24	3.0	8.9	112	1,500	3,000
Z298	72	1.7	12.1	179	3,000	2,500
Z299	96	1.7	13.1	213	6,000	2,500
Z300	144	1.7	15.1	284	10,000	2,500

FIRE RESISTANT – FSC 180 min.

Specification: CLT – Z281; Z285 – distribution cable; MLT – Z282, Z283, Z284



Indoor



Outdoor



Halogen free



Armoured




Duct



Fire resistant



Antirodent

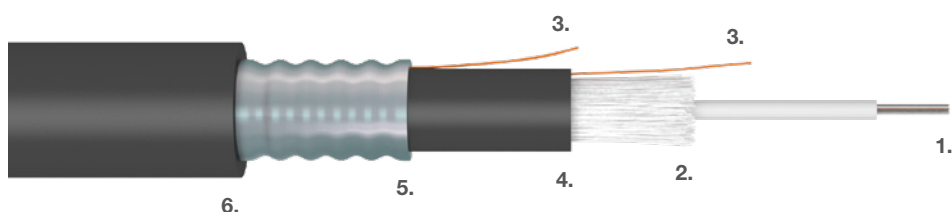

Description of materials:

- 1.** Gel filled PBT loose tube with optical fibers. **2.** Waterblocking E-glass yarn. **3.** Rip-Cord.
4. FR-LSZH inner jacket, UV stable. **5.** Corrugated steel tape. **6.** FR-LSZH outer jacket, UV stable.

Temperature range	Z281	Z285	Z282, Z283, Z284
Installation	-15 to +50 °C	-15 to +50 °C	-15 to +50 °C
Operation	-30 to +80 °C	-20 to +80 °C	-40 to +80 °C
Storage	-40 to +80 °C	-20 to +80 °C	-40 to +80 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z281	24	3.2	12.5	211	2,000	5,000
Z285	24	0.9 – buffer	17.5	333	3,000	5,000
Z282	72	1.7	15.5	291	3,000	5,000
Z283	96	1.7	16.5	336	6,000	5,000
Z284	144	1.7	18.5	421	8,800	5,000

CPR – Simplex

Specification: ZNx1 Classification CPR Cca



Fire resistant




Indoor



FTTx



Halogen free

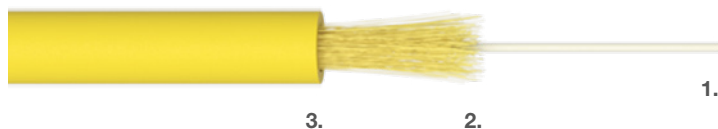

Description of materials:

1. FR-LSZH buffered optical fiber. **2.** Waterblocking aramid yarn. **3.** FR-LSZH outer jacket.

Temperature range

Installation	-5 to +50 °C
Operation	-5 to +50 °C
Storage	-5 to +50 °C

Design code	Fiber count	Cable outer diameter [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
NEW ZNx1	1	3.0	9	300	500

CPR – Duplex

Specification: ZNx0 Classification CPR Cca


CPR

Fire resistant

Indoor

FTTx

Halogen free

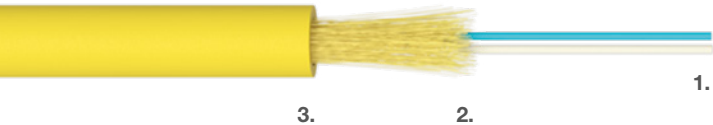

Description of materials:

1. FR-LSZH buffered optical fiber. **2.** Waterblocking aramid yarn. **3.** FR-LSZH outer jacket.


Temperature range

Installation	-5 to +50 °C
Operation	-5 to +50 °C
Storage	-5 to +50 °C

Design code	Fiber count	Cable outer diameter [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
ZNx0	2	2.8	8	280	1,000

CPR – DROP

Specification: ZN02 Classification CPR Dca



Description of materials:

1. Optical fibers. **2.** Aramid yarn. **3.** FR-LSZH outer jacket, UV stable.

Temperature range

Installation	-5 to +50 °C
Operation	-20 to +60 °C
Storage	-20 to +60 °C

Design code	Fiber count	Cable outer diameter [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
ZN02	24	4.0	16	700	1,000

CPR – CLT

Specification: ZN06 Classification CPR Dca

CPR


Fire resistant

Indoor

Outdoor

FTTx

Halogen free

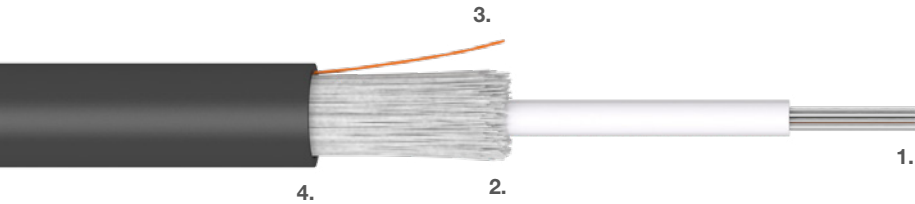

Description of materials:

1. Gel filled PBT loose tube with optical fibers. 2. Waterblocking E-glass yarn. 3. Rip-Cord.
 4. FR-LSZH outer jacket, UV stable.


Temperature range

Installation	-15 to +50 °C
Operation	-20 to +70 °C
Storage	-20 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
ZN06	4-12	2.5	5.4	37	1,100	2,000

CPR – CLT

Specification: ZN05 Classification CPR Dca

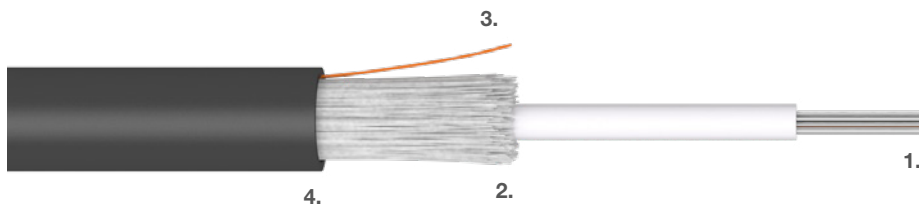

Description of materials:

- 1.** Gel filled PBT loose tube with optical fibers. **2.** Waterblocking E-glass yarn. **3.** Rip-Cord.
4. FR-LSZH outer jacket, UV stable.


Temperature range

Installation	-15 to +50 °C
Operation	-20 to +70 °C
Storage	-20 to +70 °C

Design code	Fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
ZN05	4-24	3.0	6.4	51	1,100	2,000

CPR – CLT CST – FSC 90 min.

Specification: ZN01 for 12F or 24F Classification CPR B2ca, for 1–24F Classification CPR Cca

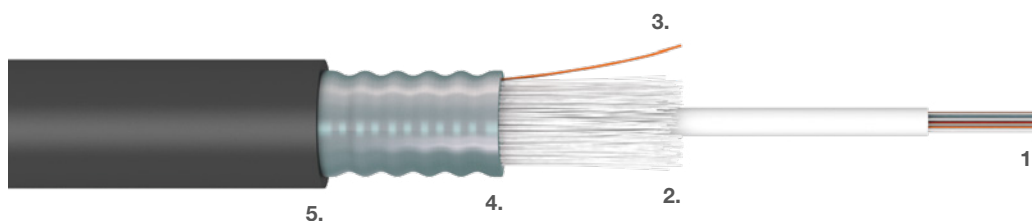

Description of materials:

- 1.** Gel filled PBT loose tube with optical fibers. **2.** Waterblocking E-glass yarn. **3.** Rip-Cord.
4. Corrugated steel tape. **5.** FR-LSZH outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-20 to +70 °C
Storage	-20 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
ZN01	1–24	3.0	10.1	124	2,500	4,500

CPR – CLT CST

Specification: ZN07 for 4–24F Classification CPR Dca



Fire resistant



Indoor



Outdoor



FTTx




Halogen free



Armoured



Antirodent

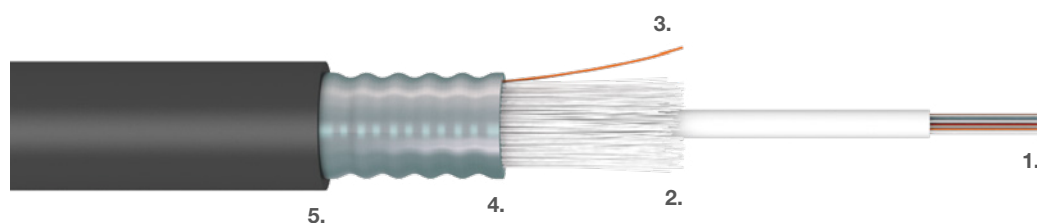

Description of materials:

- 1.** Gel filled PBT loose tube with optical fibers. **2.** Waterblocking E-glass yarn. **3.** Rip-Cord.
4. Corrugated steel tape. **5.** FR-LSZH outer jacket, UV stable.


Temperature range

Installation	-15 to +50 °C
Operation	-20 to +70 °C
Storage	-20 to +70 °C

Design code	Fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
ZN07	4–24	3.0	7.9	90	1,100	3,000

CPR – MLT

Specification: ZN03 for 12 fibers Classification CPR Cca for 12–144 fibers Classification CPR Dca

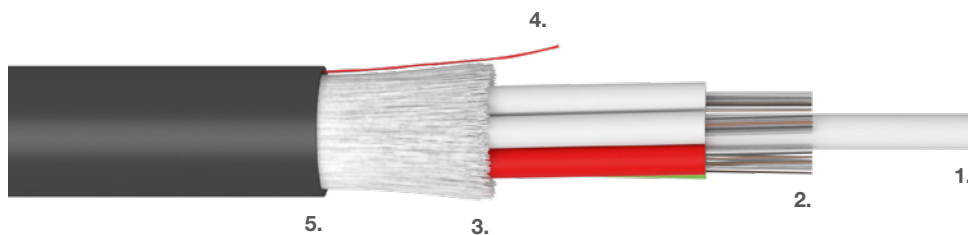

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Waterblocking E-glass yarn. **4.** Rip-Cord. **5.** FR-LSZH outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
ZN03	12–48	1.7	7.9	71	1,300	2,000
ZN03	12–72	1.7	8.8	90	2,000	2,000
ZN03	96	1.7	10.0	116	4,300	2,000
ZN03	144	1.7	12.2	171	7,300	2,000

CPR – MLT CST

Specification: ZN04 for 12F Classification B2ca and a 12–72F Classification CPR Cca



Fire resistant



Indoor



Outdoor



FTTx




Halogen free



Armoured



Antirodent

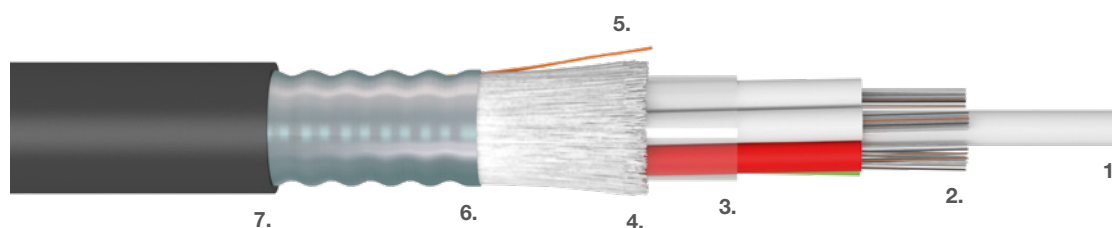

Description of materials:

1. FRP dielectric central strength member. 2. Gel filled PBT loose tube with optical fibers.
3. Water-swellable tape. 4. Waterblocking E-glass yarn. 5. Rip-Cord. 6. Corrugated steel tape.
7. FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
ZN04	12–48	1.7	10.5	132	1,300	2,000
ZN04	12–72	1.7	10.5	142	1,800	2,000

CPR – MLT SWA

Specification: ZN08 Classification CPR B2ca 72F.

CPR

Fire resistant

Indoor


Outdoor

FTTx

Halogen free

Armoured

Antirodent

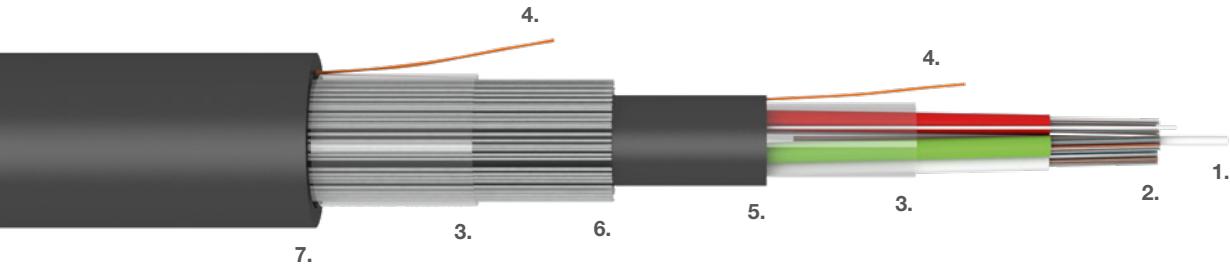

Description of materials:

- 1. FRP dielectric central strength member.
- 2. Gel filled PBT loose tube with optical fibers.
- 3. Water-swellable tape.
- 4. Rip-Cord.
- 5. FR-LSZH inner jacket.
- 6. Steel Wire Armour (SWA).
- 7. FR-LSZH outer jacket, UV stable.


Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
NEW ZN08	72	1.7	13	322	4,000	2,000

TUNNELS and SUBWAY – CLT Fire Resistant Cable CST Armoured – FSC 90 min.

Specification: Z297 Classification CPR Dca

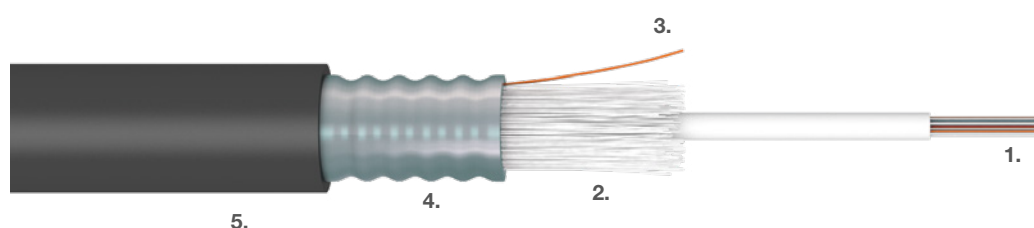

Description of materials:

- 1.** Gel filled PBT loose tube with optical fibers. **2.** Waterblocking E-glass yarn. **3.** Rip-Cord.
4. Corrugated steel tape. **5.** Black FR-LSZH outer jacket, UV stable.


Temperature range

Installation	-15 to +50 °C
Operation	-30 to +70 °C
Storage	-30 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
NEW Z297	24	3.0	8.9	112	1,500	3,000

TUNNELS and SUBWAY – MLT Fire Resistant Cable CST Armoured – FSC 90 min.

Specification: Z300 Classification CPR Dca

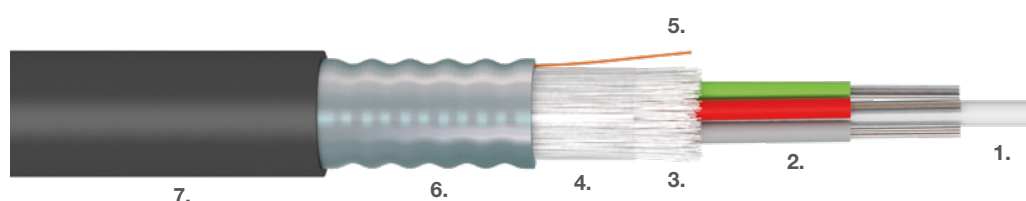

Description of materials:

1. FRP dielectric central strength member (OD 2.5 mm), PE coated (OD 5.2 mm). **2.** Gel filled PBT loose tube with optical fibres. **3.** Waterblocking E-glass yarn. **4.** Water-swellable tape. **5.** Rip-Cord. **6.** Corrugated steel tape. **7.** FR-LSZH outer jacket, UV stable.


Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
NEW Z300	144	1.7	15.1	284	10,000	2,500

TUNNELS and SUBWAY – CLT Fire Resistant Cable CST Armoured – FSC 90 min.

Specification: ZN01 for 12F or 24F Classification CPR B2ca, for 1–24F Classification CPR Cca

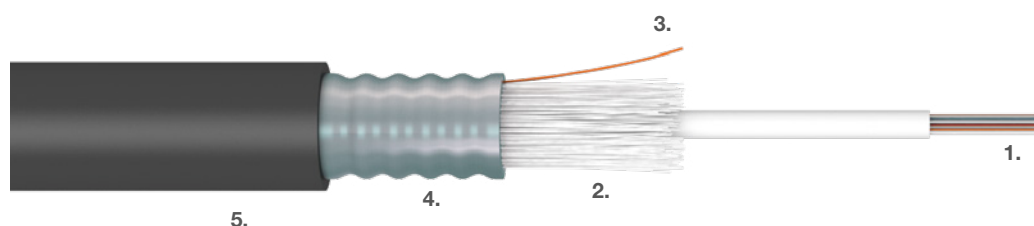

Description of materials:

- 1.** Gel filled loose tube with optical fibres. **2.** Waterblocking E-glass yarn. **3.** Rip-Cord.
4. Corrugated steel tape. **5.** FR-LSZH outer jacket, UV stable.


Temperature range

Installation	-15 to +50 °C
Operation	-20 to +70 °C
Storage	-20 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
NEW ZN01	1–24	3.0	10.1	124	2,500	4,500

TUNNELS and SUBWAY – MLT Fire Resistant Cable CST Armoured – FSC 90 min.*

Specification: ZN04 for 12F Classification B2ca and a 12–72F Classification CPR Cca

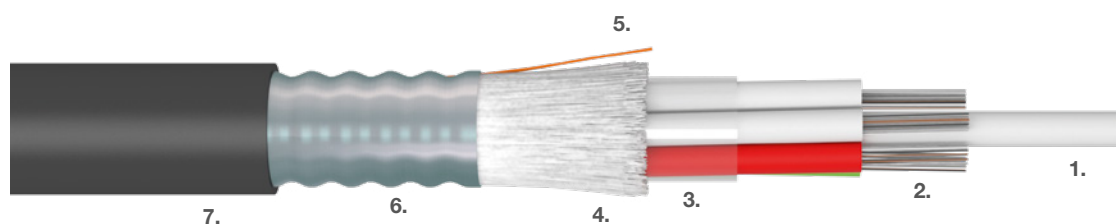

Description of materials:

1. FRP dielectric central strength member (OD 3.0 mm).
2. Gel filled PBT loose tube with optical fibers.
3. Water-swellable tape.
4. Waterblocking E-glass yarn.
5. Rip-Cord.
6. Corrugated steel tape.
7. FR-LSZH or PE outer jacket, UV stable.

Temperature range


Installation	-15 to +50 °C
Operation	-40 to +60 °C
Storage	-40 to +60 °C

*Available in Autumn 2025

Design code	Fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
NEW ZN04	12–48	1.7	10.5	132	1,300	2,000
NEW ZN04	12–72	1.7	10.5	142	1,800	2,000

TUNNELS and SUBWAY – MLT Fire Resistant Cable SWA Armoured – FSC 90 min.*

Specification: ZN08 Classification CPR B2ca

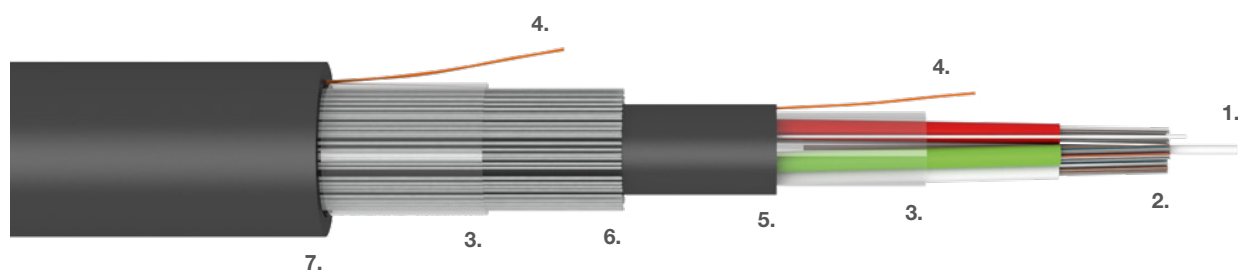

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Water-swellable tape. **4.** Rip-Cord. **5.** Black FR-LSZH inner jacket. **6.** Steel Wire Armour (SWA).
7. Black FR-LSZH outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C


*Available in Autumn 2025

Design code	Fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
NEW ZN08	72	1.7	13	322	4,000	2,000

TUNNELS and SUBWAY – Metallic cable – AJ-HHAH

...x2x... P LG (...AL) FRNC CPR B2ca s1a d1 a1

Specification: TP 02.01.23 – KDP – 01/23

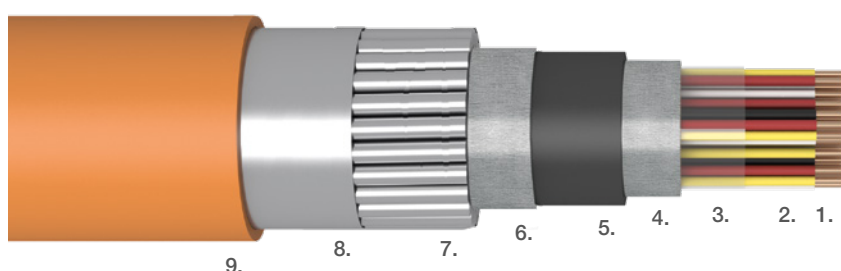

Description of materials:

1. Copper wire. 2. Core insulation – solid PE. 3. Wrapping plastic tape. 4. FR tape.
5. FRNC inner jacket, black. 6. FR tape. 7. Armor aluminium wires. 8. Fe/Zn tape.
9. FRNC outer jacket, orange.

Each 2 wires twisted to a pair.

Application

- » transmission of electric signal of telecommunication, controlling and protecting purposes of control circuit
- » for using in area danger of fire
- » for indoor and outdoor installations, tunnels or collectors, direct burial placing with highest tension or supporting without carrying wire
- » grasp or free placing in areas with alternating electromagnetic field danger
- » standard, wet or moist ambient, spraying water and fleet immersion, dropping water with pH 7÷11

Environmental conditions

Temperature ranges for laying and assembly	–5 °C
Operation and store temperatures	–40 °C ÷ +65 °C
Permitted minimum bending radius	min. 10D
Cable lifetime	min. 40 years

D – outside cable diameter

Packing on drums.

HYBRID

Specification: Z001




Outdoor



FTTx



Duct

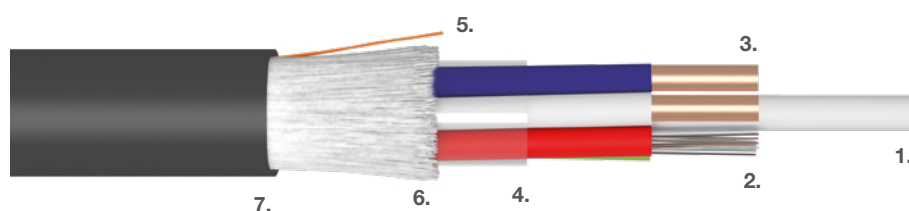

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Cu pair. **4.** Water-swellable tape. **5.** Rip-Cord. **6.** Waterblocking E-glass yarn. **7.** PE outer jacket UV stabile.


Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z001	60	2.3	10.7	94	2,500	2,000

HYBRID

Specification: Z047

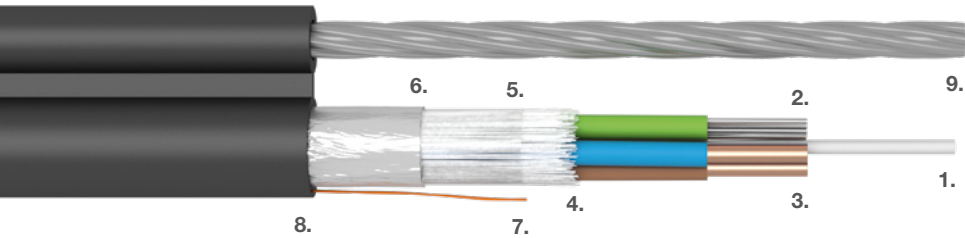

Description of materials:

1. FRP dielectric central strenght member. 2. Gel filled PBT loose tube with optical fibers.
3. Cu wire 4. Waterblocking E-glass yarn. 5. Water-swellable tape. 6. Moisture barrier.
7. Rip-Cord. 8. PE outer jacket, UV stable. 9. Steel wire messenger.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z047	12-36	2.5	21.1 × 11.2	218 (12 F + 3 Cu) 206 (24 F + 2 Cu) 194 (36 F + 1 Cu)	5,000	2,000

HYBRID

Specification: Z078, Z130



Indoor



Outdoor




Halogen free



FTTx



Duct

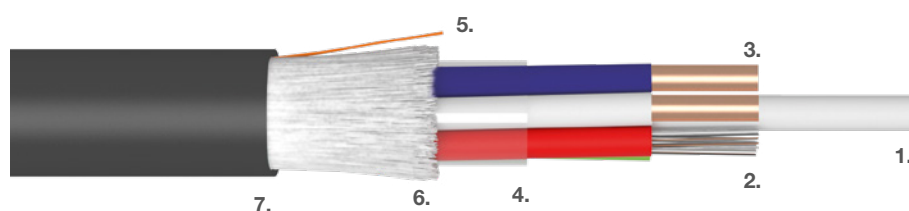

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Cu wire 1.4/2.6 mm. **4.** Water-swellable tape. **5.** Rip-Cord. **6.** Waterblocking E-glass yarn.
7. FR - LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z078	12–36	2.5	10.5	126 (12 F + 3 Cu) 110 (24 F + 2 Cu) 94 (36 F + 1 Cu)	2,000	2,000
Z130	12–36	2.5	10.5	150 (12 F + 3 Cu) 134 (24 F + 2 Cu) 117 (36 F + 1 Cu)	2,000	2,000

HYBRID

Specification: Z131, Z132



Indoor



Outdoor




Halogen free



FTTx



Duct

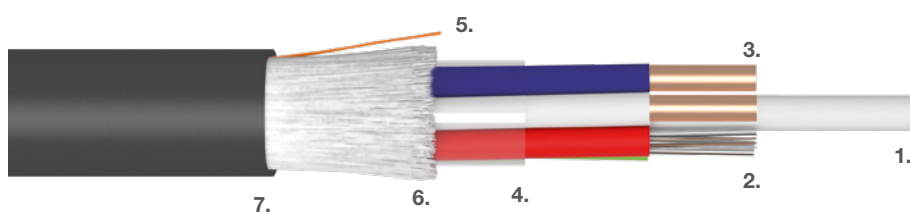

Description of materials:

- 1.** FRP dielectric central strenght member. **2.** Gel filled PBT loose tube with optical fibers.
- 3.** Cu wire 1.8/2.7 mm. **4.** Water-swellable tape. **5.** Rip-Cord. **6.** Waterblocking E-glass yarn.
- 7.** FR-LSZH or PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z131	24–36	2.5	10.6	146 (12 F + 3 Cu) 125 (24 F + 2 Cu) 105 (36 F + 1 Cu)	1,900	2,000
Z132	24–36	2.5	10.6	170 (12 F + 3 Cu) 150 (24 F + 2 Cu) 129 (36 F + 1 Cu)	1,900	2,000

HYBRID

Specification: Z212




Outdoor



FTTx



Duct

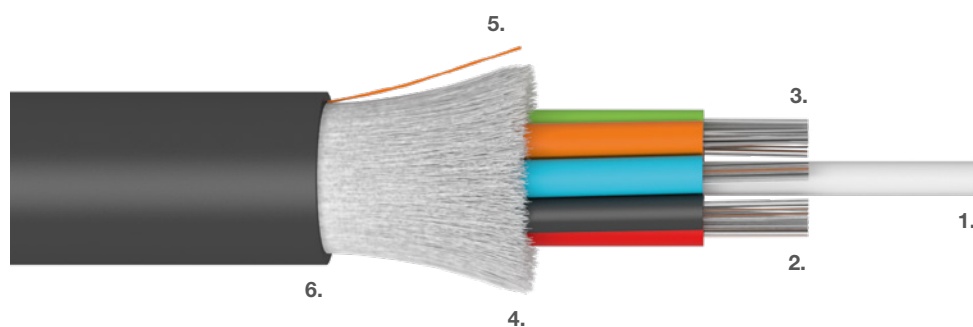

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Cu wire 1.4/3.0 mm. **4.** Waterblocking E-glass yarn. **5.** Rip-Cord. **6.** PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z212	24	3.0	13.1	176	2,700	2,000

HYBRID

Specification: Z320


Outdoor

FTTx

Duct

Armoured

Antirodent

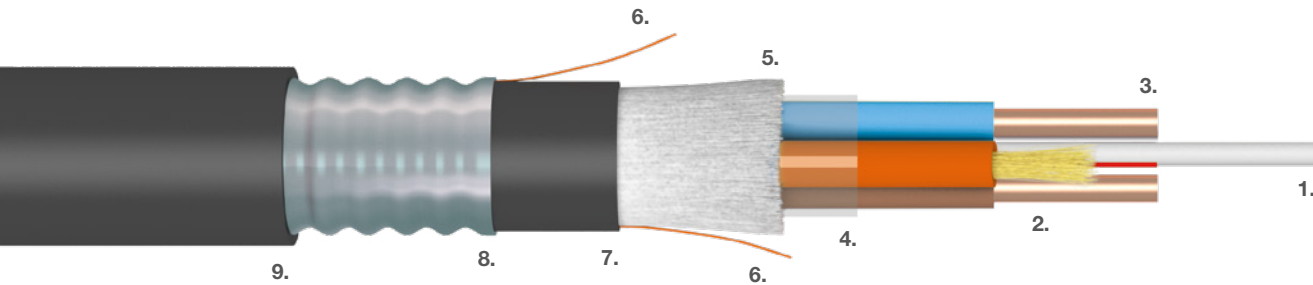

Description of materials:

- 1. FRP dielectric central strenght member.
- 2. Simplex.
- 3. Cu wire 1.8/2.8 mm
- 4. Water-swellable tape.
- 5. Waterblocking E-glass yarn.
- 6. Rip-Cord.
- 7. PE inner jacket, UV stable.
- 8. Corrugated steel tape.
- 9. PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Simplex diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z320	2	2.8	15.5	249	2,000	5,000

HYBRID

Specification: TM5I, QM5I, WM5I




Outdoor



FTTx



Duct

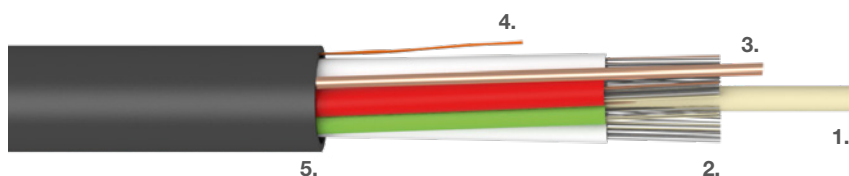

Description of materials:

- 1.** FRP dielectric central strenght member. **2.** Gel filled PBT loose tube with optical fibers.
3. Cu wire (AWG 24). **4.** Rip-Cord. **5.** PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-30 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
TM5I	72	1.5	5.8	31	700	1,500
QM5I	96	1.5	6.5	42	1,400	1,500
WM5I	144	1.5	8.6	63	1,500	1,500

UNDERWATER

Specification: BWPI



Underwater



Outdoor




FTTx



Armoured



Antirodent

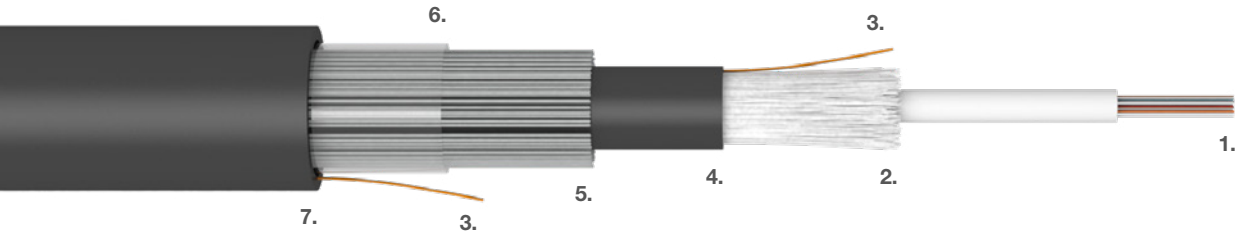

Description of materials:

- 1. Gel filled PBT loose tube with optical fibers.
- 2. Waterblocking E-glass yarn.
- 3. Rip-Cord.
- 4. PE inner jacket.
- 5. Steel Wire Armour (SWA).
- 6. Water-swellable tape.
- 7. PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-30 to +70 °C
Storage	-30 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Max. water depth [m]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
BWPI	24	3.0	11.0	150	199	4,000	4,000

UNDERWATER

Specification: LXPK, FXPK, GXPK, HXPK, IXPk



Underwater



Outdoor




FTTx



Armoured



Antirodent

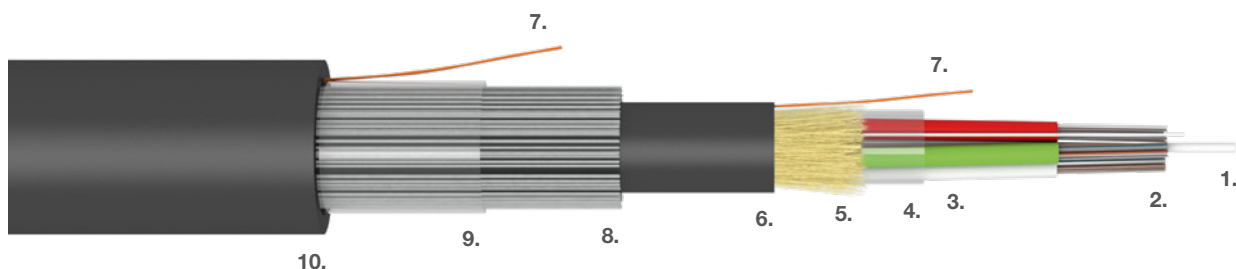

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Gel filling. **4.** PET foil. **5.** Waterblocking aramid yarn. **6.** PE inner jacket, UV stable. **7.** Rip-Cord.
8. Steel Wire Armour (SWA). **9.** Water-swellable tape. **10.** PE outer jacket, UV stable.


Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Max. water depth [m]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
LXPK	48	2.3	13.8	200	299	5,000	5,000
FXPK	72	2.3	15.0	150	348	7,500	5,000
GXPK	96	2.3	16.3	140	410	8,500	5,000
HXPK	144	2.3	19.2	130	540	12,000	5,000
IXPK	216	2.3	19.6	100	566	9,000	4,000

UNDERWATER

Specification: Z439

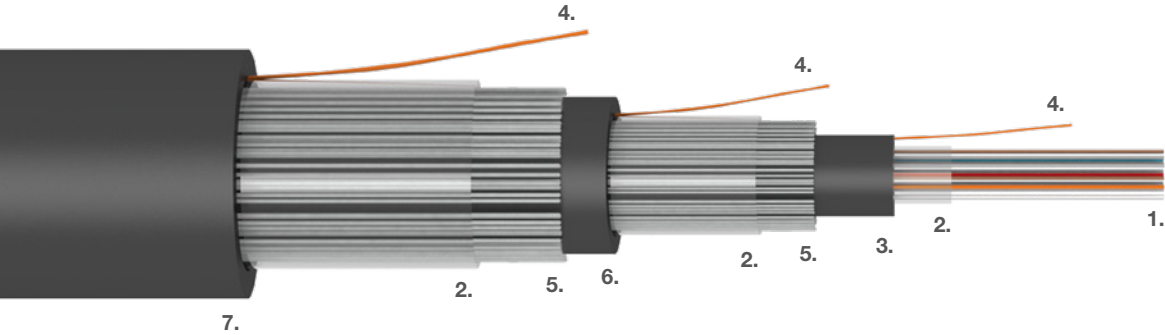

Description of materials:

1. Gel filled loose tube with optical fibers. 2. Water-swellable tape. 3. PE inner jacket, UV stable.
4. Rip-Cord. 5. Steel Wire Armour (SWA). 6. PE intermediate jacket, UV stable. 7. PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-30 to +70 °C
Storage	-30 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Max. water depth [m]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z439	24	3.0	16.2	180	502	6,500	5,500

UNDERWATER

Specification: Z388



Underwater



Outdoor




FTTx



Armoured



Antirodent

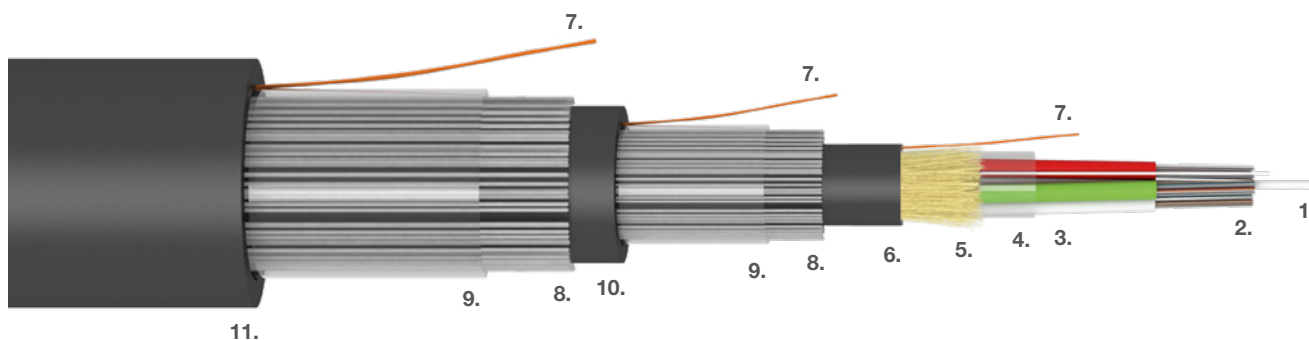

Description of materials:

- 1.** FRP dielectric central strength member. **2.** Gel filled PBT loose tube with optical fibers.
3. Gel filling. **4.** PET foil. **5.** Waterblocking aramid yarn. **6.** PE inner jacket, UV stable. **7.** Rip-Cord.
8. Steel Wire Armour (SWA). **9.** Water-swellable tape. **10.** PE intermediate jacket, UV stable.
11. PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Max. fiber count	Loose tube diameter [mm]	Cable size [mm]	Max. water depth [m]	Cable weight [kg/km]	Max. load (installation) [N]	Crush resistance [N/10 cm]
Z388	48	2.3	19.0	90	654	14,000	8,000

ARMoured MICRODUCT

Specification: Z387, Z410



Outdoor



FTTx




Armoured



Antirodent



Direct
burial

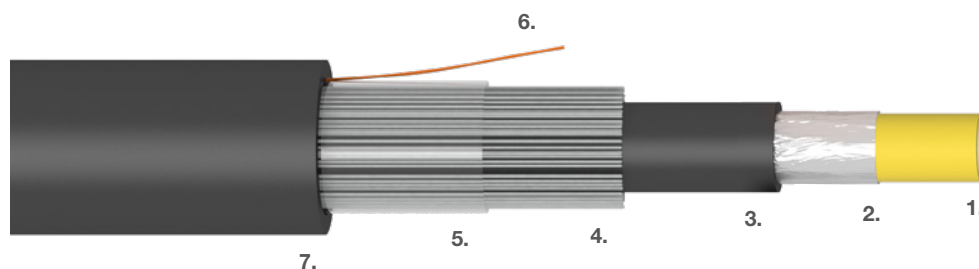

Description of materials:

1. Microduct. **2.** Moisture barrier. **3.** PE inner jacket, UV stable. **4.** Steel Wire Armour (SWA). **5.** Water-swellable tape. **6.** Rip-Cord. **7.** PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Outer jacket thickness [mm]	Microduct diameter [mm]	Cable size [mm]	Cable weight [kg/km]
Z387	1.5	12/10	21.3±0.4	564
Z410	1.5	14/12	23.8±0.4	725

FLES TUBE


Specification: FLES 3.0/8.5, FLES 4.32/20



Outdoor



Aerial

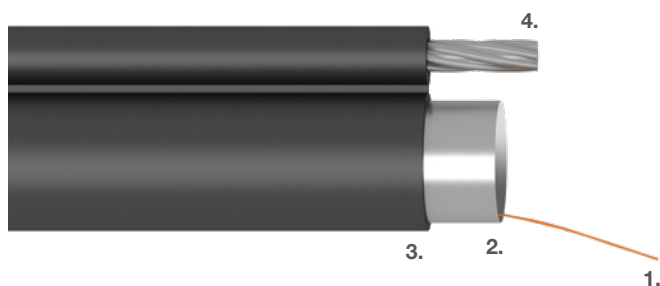

Description of materials:

1. Pulling element. **2.** Moisture barrier. **3.** PE outer jacket, UV stable. **4.** Steel Wire messenger.

Temperature range

Installation	-15 to +50 °C
Operation	-30 to +70 °C
Storage	-40 to +70 °C

Design code	Inner diameter [mm]	Max. width of cable [mm]	Max. height of cable [mm]	Supporting element diameter [mm]	Max. load (installation) [N]
FLES 3.0/8.5	8.5 ± 0.5	14,0	23.5	3.15	8,600
FLES 4.32/20	20.0 ± 1.0	26.0	38.5	4.32	16,000

TRACER WIRE

Specification: Tracer wire 0.8/1.5, Tracer wire 1.13/2.8



Outdoor



Direct
burial



Description of materials:

1. Copper wire. **2.** PE outer jacket, UV stable.

Temperature range

Installation	-15 to +50 °C
Operation	-40 to +70 °C
Storage	-40 to +70 °C

Design code	Wire diameter [mm]	Outer diameter [mm]	Cable weight [kg/km]	Cu content [kg/km]
Tracer wire 0.8/1.5	0.8	1.5	6	5
Tracer wire 1.13/2.8	1.13	2.8	14	10

KABELOVNA DECIN-PODMOKLY s.r.o.

03011

6. GENERAL SPECIFICATION

- COLOUR CODE CHARTS
- CODE TABLE
- STRIPABILITY OF THE TIGHT BUFFERED FIBER
- USED ABBREVIATIONS
- PROPERTIES OF THE CABLE SHEATH
- CHEMICAL RESISTANCE TABLE
- FIRE PROPERTIES

Colour Code Charts

IEC 60304 (Standard)




Tight Buffer

1	2	3	4	5	6	7	8	9	10	11	12
											
red	green	blue	yellow	white	grey	brown	violet	aqua	black	orange	pink
13	14	15	16	17	18	19	20	21	22	23	24
											
red + black strip	green + black strip	blue + black strip	yellow + black strip	white + black strip	grey + black strip	brown + black strip	violet + black strip	aqua + black strip	black + white strip	orange + black strip	pink + black strip

Loose Tube

1	2	3	4	5	6	7	8	9	10	11	12
											
red	green	blue	yellow	white	grey	brown	violet	aqua	black	orange	pink
13	14	15	16	17	18	19	20	21	22	23	24
											
red + black strip	green + black strip	blue + black strip	yellow + black strip	white + black strip	grey + black strip	brown + black strip	violet + black strip	aqua + black strip	natur + black strip	orange + black strip	pink + black strip

Multi Loose Tube – Tubes Colour Code


















1	2	3	
			
red	green	natur	white

Note: Different colour sequences available on request.

Colour Code Charts

TIA/EIA 598

Tight Buffer

1	2	3	4	5	6	7	8	9	10	11	12
											
blue	orange	green	brown	grey	white	red	black	yellow	violet	pink	aqua
13	14	15	16	17	18	19	20	21	22	23	24
											
blue + black strip	orange + black strip	green + black strip	brown + black strip	grey + black strip	white + black strip	red + black strip	black + white strip	yellow + black strip	violet + black strip	pink + black strip	aqua + black strip

Loose Tube

1	2	3	4	5	6	7	8	9	10	11	12
											
blue	orange	green	brown	grey	white	red	black	yellow	violet	pink	aqua
13	14	15	16	17	18	19	20	21	22	23	24
											
blue + black strip	orange + black strip	green + black strip	brown + black strip	grey + black strip	white + black strip	red + black strip	natur + black strip	yellow + black strip	violet + black strip	pink + black strip	aqua + black strip

Loose Tube Cables – Sheath Colour

All Cables



black

Tight Buffer Cables – Sheath Colour

SM E9/125 G62,5/125 OM1 G50/125 OM2 G50/125 OM3 G50/125 OM4



yellow



blue



orange



aqua



violet

Note: Different sheath colour available on request.

Code table

TIGHT BUFFER CABLES

Position	1 Character	2 Character	3 Character	4 Character
	0 Fiber in tight SP	0 Buffer only	A Acrylate buffer	0 LDPE jacket
	1 Simplex cable	1 Ø simplex 1.8 mm	B	1 LSZH jacket
	2 Duplex cable	2 Ø simplex 2.0 mm	C –	2 LSZH jacket + FRP members in jacket
	3 Heavy-duplex cable	3 Ø simplex 3.0 mm	D –	3 LDPE jacket + FRP members in jacket
	4 Break-out cable	4 Ø simplex 2.4 mm	E –	4 LSZH / SWA / LSZH
	5 Distribution cable	5 Ø simplex 2.5 mm	F LSZH Free-tight buffer	5 LSZH / SWA / HDPE
	6 Multi-distribution cable	6 Ø simplex 1.6 mm	G –	6 PVC jacket – inner / universal cable
	7 Drop cable	7 Ø simplex 1.7 mm	H –	7 PUR jacket – inner / outdoor
	8 Break-out cable without central strenght member	8 Ø simplex 2.8 mm	– –	8 LSZH / glass yarn / LSZH
	9 Quadplex cable	9 Ø simplex 2.9 mm	– –	9 PUR jacket outdoor only
		A Distribution cable – Aramid	S LSZH Free-strip (semi-tight) buffer	A HDPE jacket
		D Distribution cable – Standard		
		E Distribution cable – E-glass	T LSZH Tight buffer	B Buffer
		S Distribution cable – CST	– –	S E-glass yarn under jacket
		V Distribution cable – waterblocking Aramid		K Aramid yarn under jacket
		U Subunits with fibers	X LSZH Shielded buffer	– –
		Y –	Y –	Y HDPE jacket + FRP elements in jacket
		Z –	Z –	Z –
	Z (+number) custom designs		0 Fiber without buffer	

LOOSE TUBE CABLES

Position	1 Character	2 Character	3 Character	4 Character
	A CLT max. 12 fibers	0 –	0 –	0 LDPE outer jacket, dry core
	B CLT max. 24 fibers	1 FIG.8 + CST one jacket	1 –	1 LDPE outer jacket, filled core
	C MLT 6 × 1.7 mm [6×12] – 72	2 FIG.8 + CST two jackets	2 Messenger 2.0 mm	2 LSZH outer jacket, dry core
	D MLT 6 × 2.3 mm [6×24] – 144	3 4 × 12 in relation to „N“ in the column 1	3 Messenger 3.0 mm	3 LSZH outer jacket, filled core
	E MLT 18 × 1.5 mm [18×12] – 216	4 6 × 12 in relation to „N“ in the column 1	4 Messenger 4.5 mm	4 PA outer jacket, dry core
	F MLT 6 × 2.3 mm [6×12] – 72	5 8 × 12 in relation to „N“ in the column 1	5 Grounding conductor in core	5 PA outer jacket, filled core
	G MLT 8 × 2.3 mm [8×12] – 96	6 12 × 12 in relation to „N“ in the column 1	6 Messenger 1.6 mm	6 PE / PA outer jacket, dry core
	H MLT 12 × 2.3 mm [12×12] – 144	7 18 × 12 in relation to „N“ in the column 1	7 FRP messenger	7 PE / PA outer jacket, filled core
	I MLT 18 × 2.3 mm [18×12] – 216	8 FIG. 8	8 FRP members in core	8 LSZH / PA outer jacket, dry core
	J MLT 5 × 2.3 mm [5×12] – 60	9 24 × 12 in relation to „N“ in the column 1	9 FeZn wires in jacket	9 LSZH / PA outer jacket, filled core
	K MLT 8 × 2.3 mm [8×24] – 192	A Aramid (WB)	A –	A AL + PE outer jacket, dry core
	L MLT 4 × 2.3 mm [4×12] – 48	B –	B Inner PA jacket	B AL + PE outer jacket, filled core
	M MLT 36 × 2.3 mm [36×12] – 432	C CST one jacket with aramid under jacket	C Inner PVC jacket	C –
	N ADSS	D CST two jacket with aramid under jacket	D Supporting element FeZn wire	D –
	P MLT 8 × 1.7 mm [8×12] – 96	E E-glass	E –	E –
	Q MLT 8 × 1.5 mm [8×12] – 96	F FRPA	F Inner FRNC jacket	F –
	R MLT 12 × 1.7 mm [12×12] – 144	G –	G –	G PUR outer jacket, dry core
	S MLT 12 × 2.3 mm [12×24] – 288	H CST one jacket with E-glass yarns under jacket	H –	H PUR outer jacket, filled core
	T MLT 6 × 1.5 mm [6×12] – 72	I CST two jackets with E-glass yarns under jacket	I –	I HDPE outer jacket, dry core
	U MLT 5 × 1.7 mm [5×12] – 60	J –	J –	J –
	V MLT 18 × 1.7 mm [18×12] – 216	K –	K –	K HDPE outer jacket, filled core
	W MLT 12 × 1.5 mm [12×12] – 144	L Attenuated (lower tensile strenght and jacket)	L Inner Al/PE	L –
	X New custom designs	M Micro cable (without strenght members)	M –	M –
	Y MLT 12 × 2.8 mm [12×24] – 288	N –	N –	N –
	Z (+number) custom designs	P (jacket – aramid – jacket)	P Inner PE jacket	P PVC outer jacket, dry core
		Q (jacket – E-glass – jacket)	Q –	Q PVC outer jacket, filled core
		R Improved resistance	R 15 kN – 2 jackets	R –
		S Self-supporting nonmetallic strenght member	S –	S –
		T Self-supporting dielectric member – two jackets	T –	T Track resistant HDPE
		U –	U	U –
		V –	V	V –
		W SWA two jackets – without strenght members	W	W –
		X SWA two jackets – aramid on core	X 3 kN – 1 jacket	X –
		Y SWA two jackets – E-glass on core	Y 6 kN – 2 jackets	Y –
		Z –	Z 9 kN – 2 jackets	Z –

Stripability of the Tight Buffered Fiber

TIGHT (CODE T)	stripability up to 10 cm
FREE (CODE F)	stripability more than 100 cm

Used Abbreviations

LSZH	LOW S MOKE, Z ERO H ALOGEN
LS0H	LOW S MOKE, Z ERO H ALOGEN
LSHF	LOW S MOKE, H ALOGEN F REE
HFFR	H ALOGEN F REE, F LAME R ETARDANT
FRNC	F IRE R ETARDANT, N ON- C ORROSIVE
FR-LSZH	F IRE R ETARDANT – LOW S MOKE, Z ERO H ALOGEN

Properties of the Cable Sheath

	LDPE	HDPE	PA	FR-LSZH	PUR
Flexibility	Medium	Low	Low	High	Very High
Water Resistance	High	High	Medium	Medium	Medium
Abrasion Resistance	High	High	High	Low	High
UV Radiation Resistance	High	High	Low	High	High
Brittleness in Low Temperature	Medium	Medium	Low	Medium	Very Low

Chemical Resistance Table (@ 20 °C)

	LDPE	HDPE	PA	FR-LSZH	PUR
Acids, Dilute or Weak	E	E	F	N	G
Acids*, Strong or Concentrated	E	E	N	N	F
Alcohols, Aliphatic	E	E	N	N	F
Aldehydes	G	G	F	F	G
Bases	E	E	F	G	N
Esters	G	G	E	N	N
Hydrocarbons, Aliphatic	F	G	E	F	E
Hydrocarbons, Aromatic	F	G	E	N	N
Hydrocarbons, Halogenated	N	F	G	N	N
Ketones	G	G	E	N	N
Oxidizing Agents, Strong	F	F	N	N	N
Salts	E	E	E	G	E
Crude Oil	N	N	G	F	F
Kerosene	F	F	E	N	F
Mineral Oil	G	G	E	N	F

* For oxidizing acids, see „Oxidizing Agents, strong“.

E

30 days of constant exposure causes no damage. Plastic may tolerate for years.

G

Little or no damage after 30 days of constant exposure to the reagent.

F

Some effect after 7 days of constant exposure to the reagent.
The effect may be crazing, cracking, loss of strength or discoloration, depending on the plastic.

N

Not recommended. Immediate damage may occur. Depending on the plastic, the effect may be severe crazing, cracking, loss of strength, discoloration deformation, dissolution or permeation loss.

Note: This table must be considered as an orientation.

Fire properties

		METHOD	COMMENT
Fire properties – Flammability	pass	EN 60332-3-22 (cat. A) EN 50266-2-2	- 40 min exposure to flame - length of the burned sample max. 2.5 m
Fire properties – Acid gases	pass	EN 60754-1 EN 60754-2	- min. pH 4.3 - max. 10 µS/mm
Fire properties – Smoke density	pass	EN 61034-1 EN 61034-2	- min. 60 %

Note: Valid for all FR-LSZH sheaths.


Fire Properties

FLAME-RETARDANT


The cable must meet the requirements of the test specified in IEC standard 60332-3 or IEC 60332-1. The cable does not propagate fire and is self-extinguishing.

Notice: You can not assume that if the cable passes the test according 60332-1, a bundle of such cables passing a test 60332-3.

TEST ACC.
TO IEC 60332-1

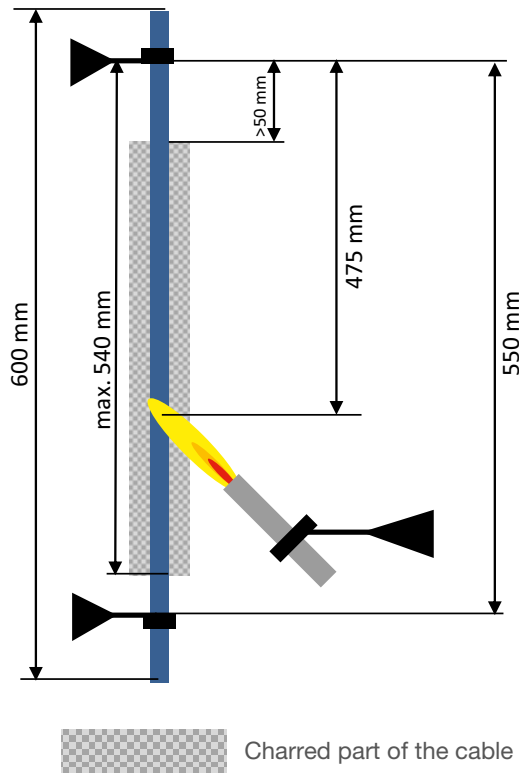

TEST ACC.
TO IEC 60332-3

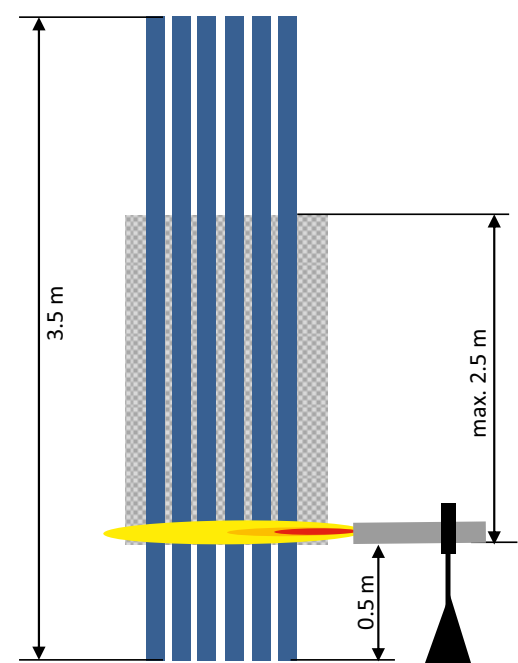


Cable Diameter	Burning Time
≤ 25 mm	60 sec
≥ 25 mm; ≤ 50 mm	120 sec

Category	Amount of Burning Material	Burning Time
A*	7.0 lt/m	40 min
B	3.5 lt/m	40 min
C	1.5 lt/m	20 min
D	0.5 lt/m	20 min

* KDP Cables

FIRE-RESISTANT

The cable must meet the requirements test specified in standard IEC 60331-11 and 25. The cable must be functional a minimum of 90 minutes in direct fire.

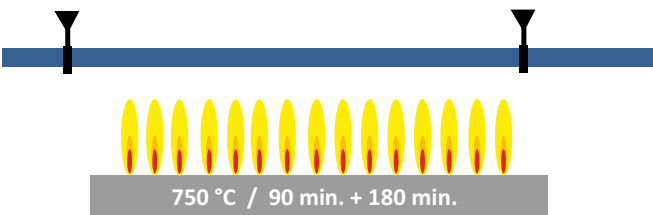





7. INSTALLATION AND MANIPULATION

- INTRODUCTION
- MANIPULATION AND STORAGE
- REWINDING/UNWINDING OF CABLE
- BEND RADIUS OF CABLE
- PULL STRENGTH OF CABLE
- VERTICAL INSTALLATION
- TWIST OF CABLE

Introduction

It is very easy to damage optical cables if manipulation with them is incorrect or if important installation procedures are not followed.

The information stated below should be taken into consideration when installing and manipulating with optical cables. Violating any of the basic rules can result in worsening of the cable's transfer characteristics or it can permanently damage it and shorten its lifetime. The handbook can also serve as a guideline for solving problem not only related to the installation of new cables but also for possible problems of cables, which have already been installed.

There is an assumption that the customer has general knowledge about the design of optical cables and the terminology related to it. If necessary, please contact KDP.

Symbols Used:



RECOMMENDED



NOT RECOMMENDED

Manipulation and Storage

The drums with the cables cannot be thrown from any heights!
The drums with optical cables have to always stand on the edges of the head, secured with a wedge to prevent movement. The only time when it is not necessary to secure the drums with a wedge is when the drums are mutually secured between each other by standing them crosswise. /Pic. 1


It is possible to store HEAVYDUPLEX, SIMPLEX, DUPLEX type cables and coils with cables up to 4mm in diameter by laying them on the head. However, the cable has to be fastened by shrink wrap to prevent the loosening of individual cable coils.

Cables intended for internal use can only be stored in closed areas without humidity. Cables for universal and outdoor use can be stored in outdoor conditions. However, the cable ends have to be waterproof. However, if the cable is on a plywood spool, it has to be stored in such a manner so as to prevent the effects of water on the spool.


When manipulating with the drums using a crane, a spacer rod has to be placed between the load bearing ropes, so that the ropes do not exert pressure on the cable through the side drums. /Pic. 2

When lifting the drums using a forklift, the drums can only be gripped from the sides and only when the skids of the forklift are long enough for the head of the drum to be positioned on it with a safe overhang. /Pic. 3


It is only possible to roll the drums short distances and only on a hard and flat surface.

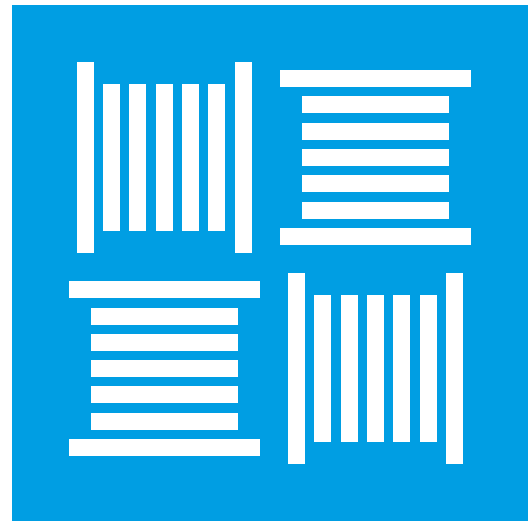

Pic. 1

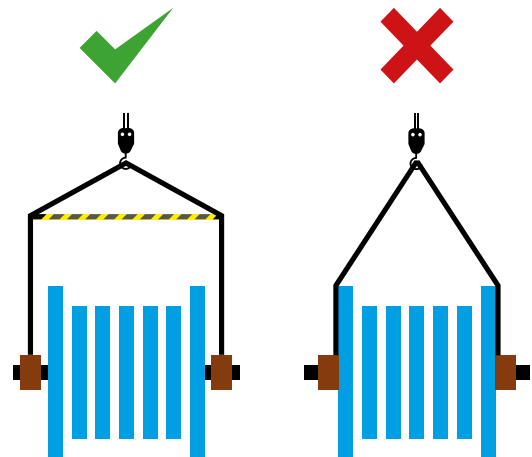

Pic. 2

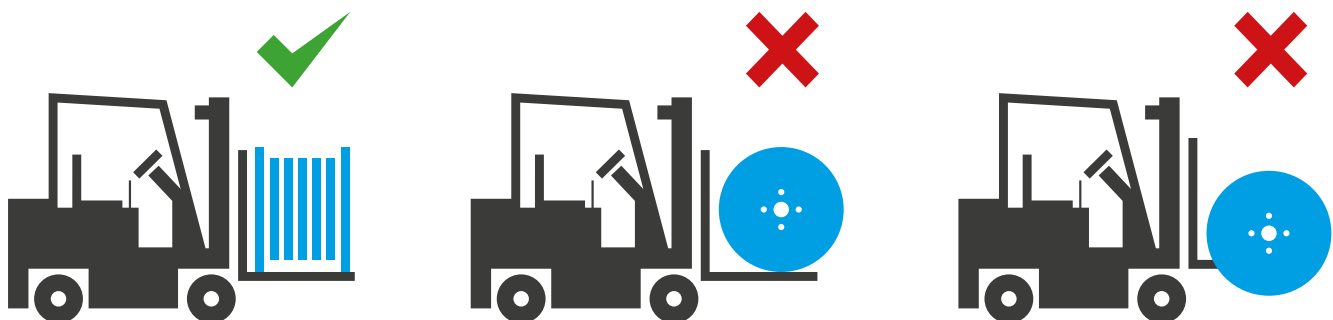


Pic. 3

Rewinding/Unwinding of Cable

The rewinding and unwinding of cables is only possible in temperature above 5 °C. If for any reason, it is necessary to unwind the cable in a lower temperature, the cable has to be left at a minimum temperature of 20 °C for at least 24 hours beforehand. For rewinding the cable, the winding (bending) direction of the cable has to be maintained, unwinding cannot form an “S” shape. /Pic. 4


When unwinding the cable, it is necessary to maintain continuous pull without variation. Unwinding without pull can then lead to the loosening of individual rolls and to the consequent mutual under pull, possibly to the uncontrolled, sharp tugging of the cable, resulting in the damaging of the optical fibers.

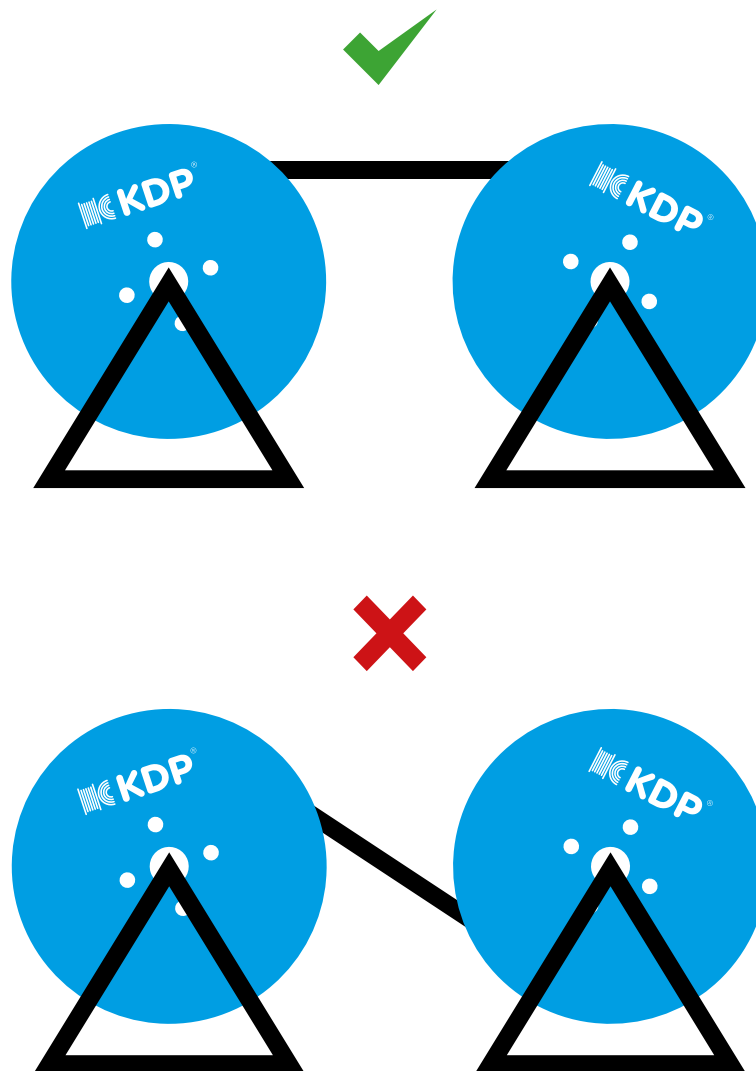

Pic. 4

Bend Radius of Cable

This value is defined by the cable manufacturer and exceeding this value can cause invisible fiber damage, which does not have to be evident immediately following installation, but later on. Therefore, it is important to follow the minimum bend diameter not only during in-stallation but also for a cable, which has already been installed.

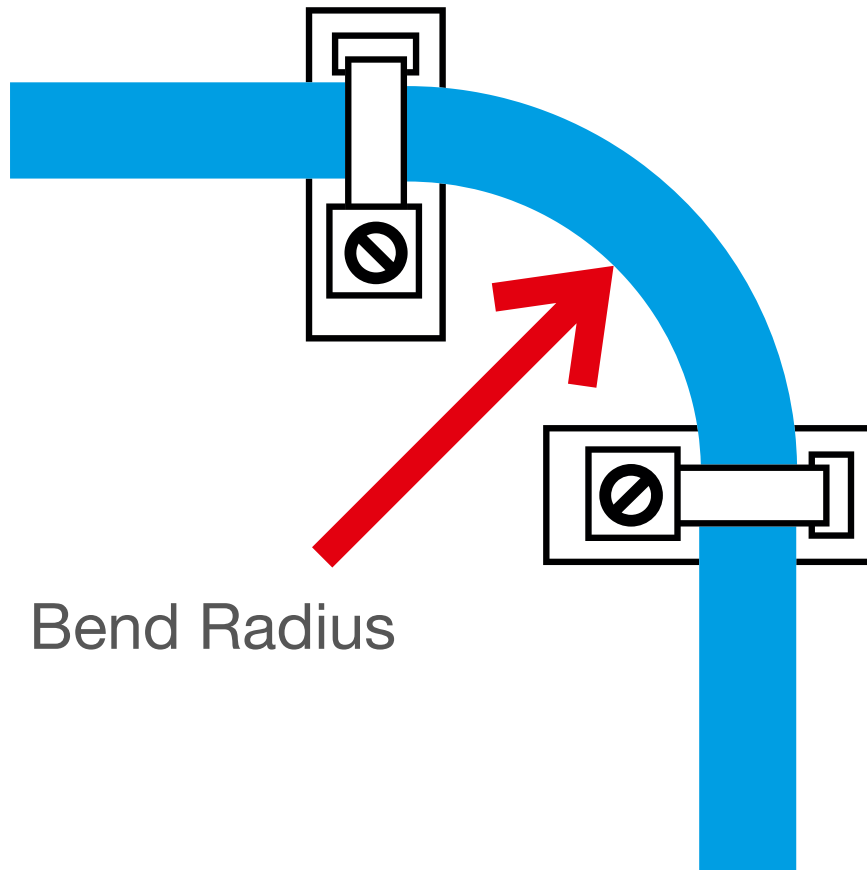

Bend Radius

Pic. 5

Pull Strength of Cable

Unless stated otherwise, all optical cables manufactured at KDP are designed for conditions under which there is not pull strain exerted during operations, or only such a pull that the fiber in the cable is not strained (such an option is stated in the cable specification). If the straining of cables takes place in operations, we recommend consulting such situation with KDP prior to cable installation.

The maximum pull defined is for the purpose of cable installation and this value should never be exceeded! It is not force that snaps the cable in two, but the limit which guarantees that the fibers will not be damaged.

For checking purposes, upon installation, it is strongly recommended to place a mid-cable and a pull cable measuring pull for the continuous monitoring of the current cable pull. If necessary, also record a video of the course of installation, which then significantly aids in resolving consequent problems following installation. In order to decrease resistance when dragging, it is suitable to use a lubricant. Prior to use, verify that it is compatible with the material of the cable coating.


Vertical Installation

A gel, resistant to dripping up to 70 °C for a period of 24 hours, is used in optical KDP cables. This gel is also excludes oil and maintains its characteristics for the entire lifetime of the cable. Therefore, it is possible to install optical cables with independent secondary protection, a gel-filled tube, vertically, either as a construction with one central tube as well as multi-tube cables. This does not apply for multi-tubes, where the inner cable tube (the space between the individual tubes) is filled with gel. We do not recommend installing such cables vertically.


Conditions for the bend radius of the pull strength and other parameters are the same as for any common horizontal installation. The procedure applies for installation outdoors as well as indoors, sewage systems, etc.

The vertical placement of cables has to be fastened by clamps, to prevent sliding. The maximum distance between individual clamps has to be such, where the weight of the cables between the clamps exceeds the pull strength and does not strain the fibers in the cable. Horizontal loops will form on vertically running cable as a relief element and protection against the possible movement of the cable in case of vibration of the load bearing construction against fixed mounting in the lower part of the cable. The distance of the loops depends on the inner diameter of the tubes in the cable. /Pic. 6

If the cable in the lower part directly enters into the connector panel, it should enter by 3 loops. The purpose of this is to compare the change in the lengths of cables given the change in temperatures. This is from the lower part of the panel. /Pic. 7

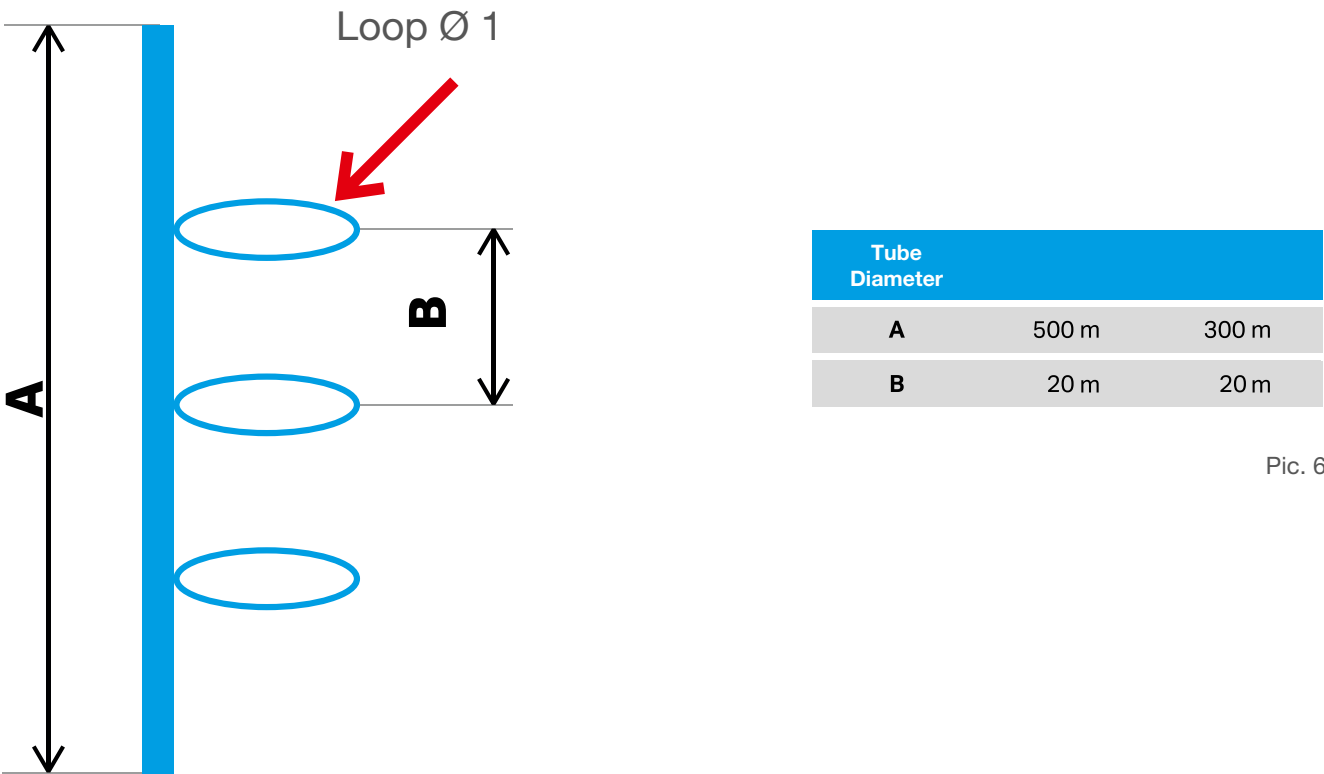


Pic. 6

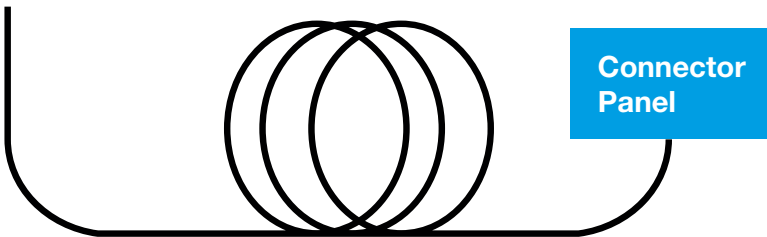

Pic. 7


Twist of Cable

Avoid twisting the cable during installation because this can cause stress to the fiber. If you install a cable longer than 30 m and you are pulling it through a narrower section (for example, underground), unwind the cable beforehand. Place cables freely in a figure eight on the floor. /Pic. 8. Placing cables in a loop prevents twisting. The diameter of the loop should be 2–4 m, depending on the rigidity of the cable. The length of the figure eight is 8–10 m.

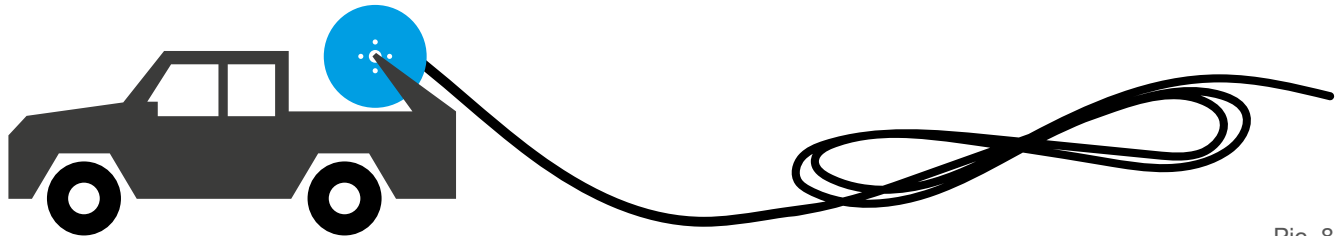

Pic. 8


It is recommended to place for example, cardboard paper between individual rolls.
Pic. 9

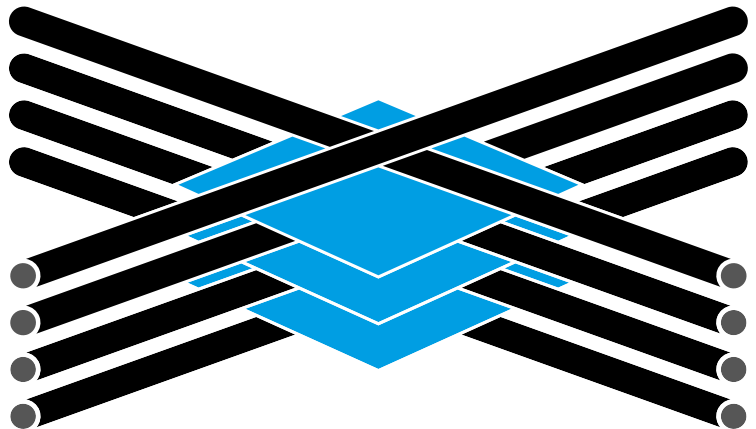

Pic. 9

Prior to taking the cable from the figure eight, tilt it by 180°, with the aid of other individuals, so that the beginning of the cable is facing upward. /Pic. 10

After pulling it through, do not wind it back up onto the drum, but place it back in a figure eight for further laying.

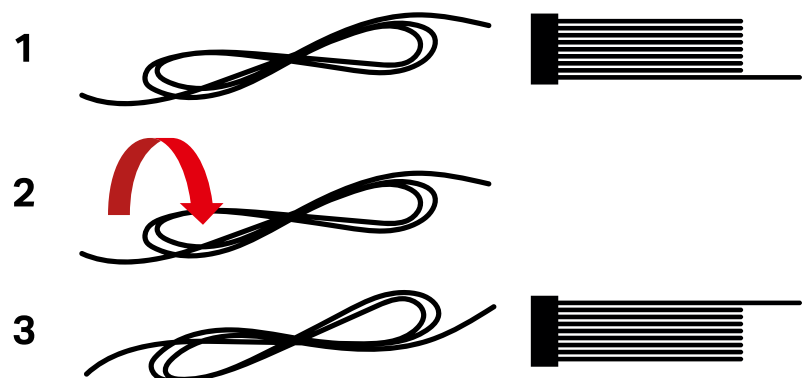

Pic. 10

This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



 KDP |  KDP - World Connecting Cables

KABELOVNA Děčín Podmokly, s.r.o.

Ústecká 840/33 | 405 33 Děčín | Czech Republic

Phone: +420 412 706 100 | **E-mail:** sales@kabelovna.cz

www.kabelovna.cz