


J-V(ZN)H(BN)H 2-24 F Breakout 2,4 mm

This cable is suitable for indoor use. The cable has standard level of rodent protection.

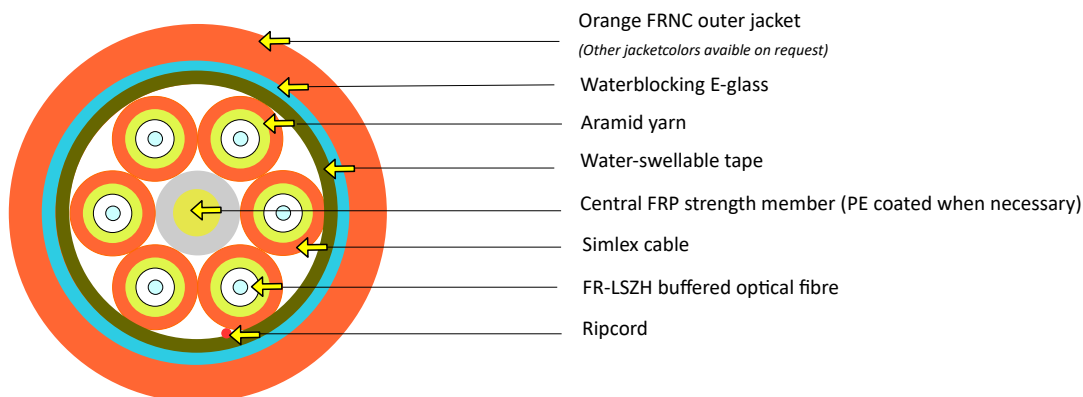

The picture represents a cable with 6 fibres

Mechanical and Environmental properties

Cable outer diameter	2-4F	9,0±0,4	mm	EN 60811-203
	6F	10,5±0,4		
	8F	12,1±0,4		
	12F	15,0±0,4		
	16F	14,7±0,4		
	18F	15,3±0,4		
Cable weight	24F	17,7±0,4	kg/km	
	2F	80		
	4F	87		
	6F	117,4		
	8F	153,1		
	12F	227		
	16F	223		
	18F	240,3		
Max. tensile strength	24F	317	N	EN 60794-1-21-E1
	Simplex diameter	2,4		
	Outer jacket thickness	1		
	2-4F	2200		
	6F	2900		
	8F	3300		
Crush resistance test	12F	4400	N	EN 60794-1-21-E3
	16F	4800		
	18F	4800		
	24F	5500		
Impact resistance test		10	Nm	EN 60794-1-21-E4
Min. bend radius (no load)		10	× OD	EN 60794-1-21-E11a
Min. bend radius (load)		15	× OD	EN 60794-1-21-E11b
Temperature range	Installation	-5 to + 50°C	EN 60794-1-22-F1	
	Operation	-20 to + 60°C		
	Storage	-20 to + 60°C		

Cable life time - minimum 30 years

Sheat Marking

Print colour	Black
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Buffer

xxTx	Tight
xxFx	Free
Colour	Natur

Other buffer colours available on request.

Simplex jacket

Material	FR-LSZH
Colour	SM 9/125 - Yellow
	MM 50/125 - Green
	MM 62,5/125 - Orange

Other jacket colours available on request

Outer jacket

Material	FR-LSZH
Colour	SM 9/125 - Yellow
	MM 50/125 - Green
	MM 62,5/125 - Orange

Other jacket colours available on request

Packing

Depending on ordered put-up lengths

