

All Dielectric Self-Supporting Cable




KABELOVNA Děčín Podmokly s.r.o.
 Ústecká 840/33, 405 33 Děčín 5
 Czech Republic
 DIČ CZ26759993
 tel.: +420 412 706 222
 www.kabelovna.cz
 31.1.2019 ver. 7

ID: **N4ZI**

ADSS-DQ2Y(ZN)2YT 10kN 6×2,8 max. 72F

This cable is suitable for outdoor aerial use.

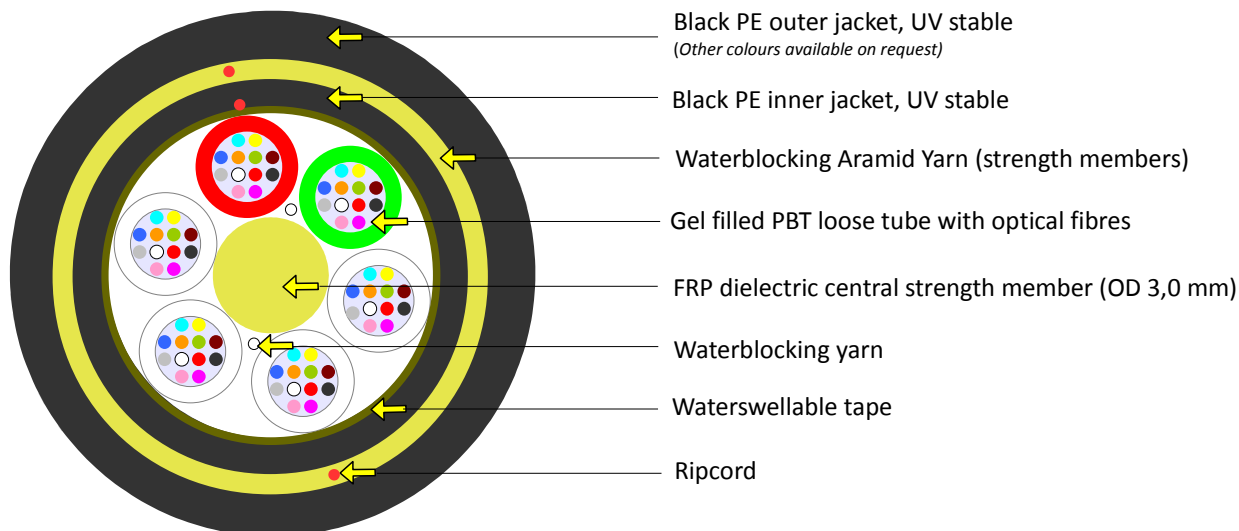

Mechanical and Environmental properties

Test	Value	Unit	Method
Cable outer diameter	15,5±0,4	mm	EN 60811-203
Cable weight	195	kg/km	
Outer jacket thickness	2	mm	
Loose tube diameter	2,8	mm	
Thermal expansion coefficient	9,5	ppm/K	
Modulus of elasticity	11,4	Gpa	
Maximum allowable tension	10	kN	EN 60794-1-21-E1
Crush resistance test	3000	N	EN 60794-1-21-E3
Impact resistance test	30	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	15	× OD	EN 60794-1-21-E11a
Min. bend radius (load)	20	× OD	EN 60794-1-21-E11b
Moisture resistance test	pass		EN 60794-1-22-F5
Temperature range	Installation	-15 to + 50	°C
	Operation	-40 to + 70	°C
	Storage	-40 to + 70	°C

Cable life time - minimum 30 years

Sheat Marking

Print colour	White
Print method	INK-Jet or Hot-foil
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Fibre colour coding

According to IEC 60304

1	Red	7	Brown
2	Green	8	Violet
3	Blue	9	Turquoise
4	Yellow	10	Black
5	White	11	Orange
6	Grey	12	Pink

Other fibre colour sequences available on request

Tube colour coding

1	Red
2	Green
3 – 6	White

In the case of lower number of fibres some tubes are replaced by uncoloured fillers

Other tubes colour sequences available on request

Packing

Depending on ordered put-up lengths

All Dielectric Self-Supporting Cable



KABELOVNA Děčín Podmokly s.r.o.
 Ústecká 840/33, 405 33 Děčín 5
 Czech Republic
 DIČ CZ26759993
 tel.: +420 412 706 222
 www.kabelovna.cz
 31.1.2019 ver. 7

ID: **N4ZI**

ADSS-DQ2Y(ZN)2YT 10kN 6×2,8 max. 72F

SPAN (m)	INSTALATION		NESC LIGHT			NESC MEDIUM			NESC HEAVY		
			sag (m)		load (N)	Sag (m)		load (N)	sag (m)		load (N)
	Sag 1,5%(m)	N	horizontal	vertical		horizontal	vertical		horizontal	vertical	
40	0,6	659	0,86	0,28	1919	0,57	0,77	2267	0,55	1,0	3343
60	0,9	988	1,39	0,45	2663	0,94	1,27	3102	0,91	1,67	4520
80	1,2	1317	1,97	0,64	3342	1,33	1,8	3892	1,31	2,4	5600
100	1,5	1646	2,58	0,84	3990	1,76	2,37	4621	1,74	3,18	6606
120	1,8	1976	3,22	1,05	4596	2,2	2,97	5309	2,19	4,0	7560
140	2,1	2305	3,89	1,27	5187	2,67	3,6	5971	2,66	4,87	8462
160	2,4	2634	4,58	1,5	5751	3,15	4,25	6609			
180	2,7	2963	5,28	1,73	6312	3,65	4,92	7233			
200	3,0	3293	6,02	1,97	6847	4,16	5,61	7833			
220	3,3	3622	6,76	2,21	7379	4,68	6,3	8422			
240	3,6	3951	7,52	2,46	7896						
260	3,9	4280	8,29	2,71	8409						

